


HOSET

LIGHTING SOLUTIONS

WORKING CATALOGUE

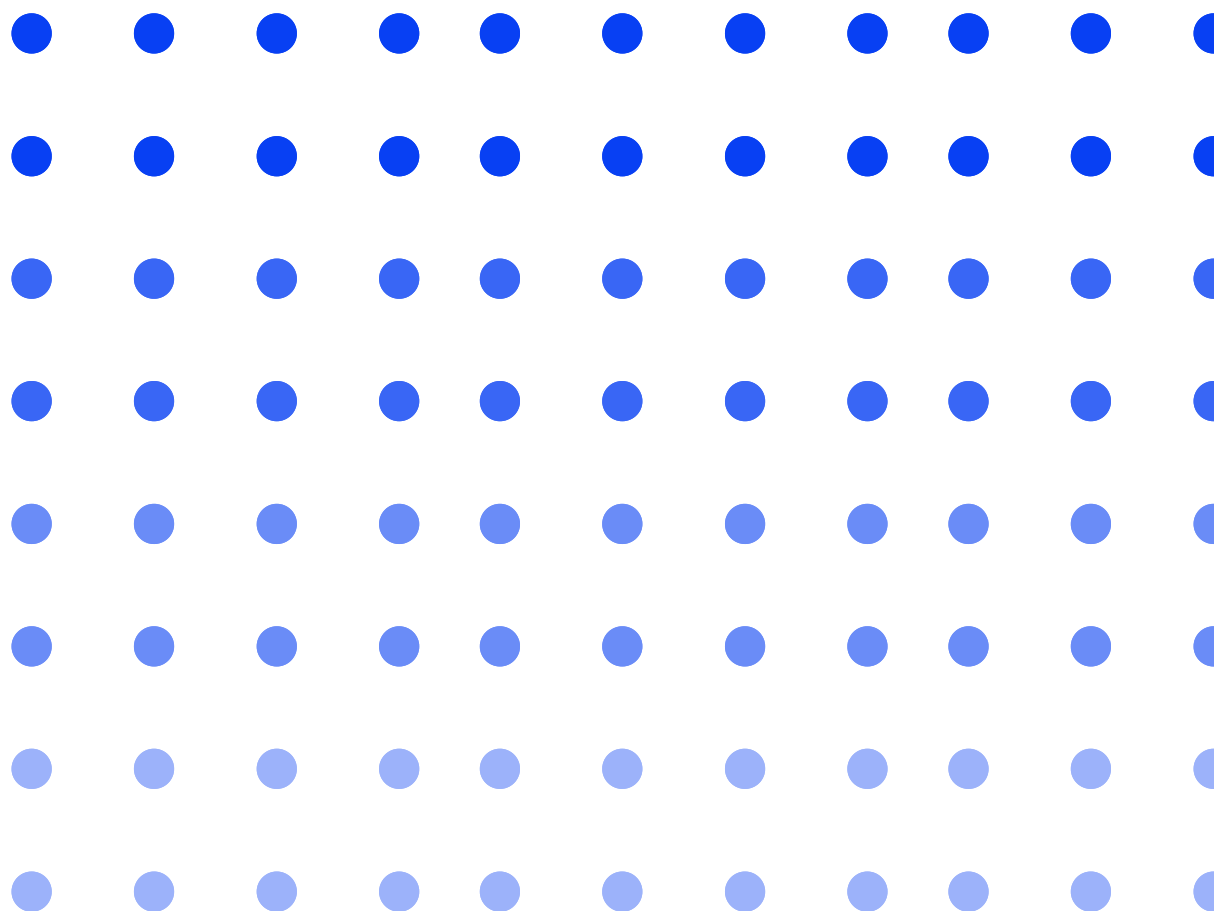

Indoor

Ceiling recessed



RIO

16




RIO A

18



DROP IN

20



CELL

22




KARDAN

24



INVISIBLE SQUARE

26



INVISIBLE MINI R

26



TUB M R

30



TUB M IN

32



TUB M OUT

36



SOL IN

38




NANO TUB S

42


Indoor

Ceiling recessed



NANO R TRIMLESS

44



NANO S

46




NANO R WALL
WASHER

48



NANO S WALL
WASHER

49



VARIO LINEA

51



VARIO COMFORT


54



VARIO WALL
WASHER


56

Wall recessed



IN WALL RING

58



IN WALL O

58

Indoor


Wall surface



BUTTON R
60



BUTTON SM
62




STRAIGHT
64



ROD
68



SLIMLINE
72



SFERA WALL S
76



SFERA WALL M
78

Indoor

Ceiling surface



TUB M
80




TUB L
87



ROLL
88




BLOCK
90



BOX
91



SOL SURF
92



TURBINE
94



DISK
96



BRIGHT
98



FLAT S
99




FLAT R
100

Indoor

Ceiling suspended



TUB XS P
104



MATCH S P
106



TUB S P
110



TUB S P ZOOM
116



TUB M P
118



TUB M P ZOOM
122



BALL
124



SLIMLINE
128



POINTER
130



OFFICE
132



PROFILE
134

Floor



POINTER FLOOR
136

Indoor

Track 42V




MINI_LINE 42
TRACK S
140

Tracklights 42V



MINI_LINE 42
LINEA
144



MINI_LINE 42
COMFORT
146



MINI_LINE 42
TUB XS
148




MINI_LINE 42
TUB S
150

Indoor


Track 48V




IN_LINE
TRACK T
154



IN_LINE
TRACK R
156




IN_LINE
TRACK S
158



IN_LINE SHORT
TRACK S
166

Tracklights 48V




IN_LINE
LINEA
178



IN_LINE
COMFORT
180




IN_LINE
WALL WASHER
181



IN_LINE
TUB XS
182



IN_LINE
COMFORT B 205
184



IN_LINE
LINEA B 205
184



IN_LINE LED
INDIRECT
186

Indoor

Tracklights 48V



IN_LINE
TUB XS
188



IN_LINE
TUB S
190



IN_LINE
TUB S X2
191



IN_LINE
ZOOM
192



IN_LINE
TUB M NB
193




IN_LINE
GALLERY
194



IN_LINE
TUB M A 90
196



IN_LINE
TUB M A 140
198




IN_LINE
SOL MINI
200



IN_LINE
SOL
201



IN_LINE
WIN
202




IN_LINE
SFERA
202

Indoor


Tracklights 48V



IN_LINE
ART
202



IN_LINE
STICKS
204



IN_LINE
BALL M
206



IN_LINE
BALL L
207



IN_LINE
TUB XS P
208




IN_LINE
MATCH
210



IN_LINE
TUB S P
212



IN_LINE
TUB S P ZOOM
215



IN_LINE
TUB M P
216



IN_LINE
TUB M P ZOOM
217



IN_LINE
CONE
218



IN_LINE
DISK
218

Indoor

Tracklights 48V



IN_LINE
LINEA
222



IN_LINE
COMFORT
222



IN_LINE
LINEA B 205
223



IN_LINE
COMFORT B 205
223



IN_LINE
TUB S A 60
224



IN_LINE
TUB M A 90
224



IN_LINE
TUB M A 140
225



IN_LINE
SOL
226

Outdoor

Ceiling



Wall surface



Wall recessed



Spot light



Outdoor

In ground



Bollards



Indoor

LED Strip



120 LED/m
3000K/4000K
280



120 LED/m
2300K
284



128 LED/m
3000K
286



192 LED/m
3000K/4000K
288



COF LED
3000K/4000K
290



120 LED/m
RGB
292



168 LED/m
RGB
292



60 LED/m
RGBW
294



140 LED/m
TUNABLE WHITE
296




NEON LED STRIP
3000K/4000K
298




FLEXY
2700K/3000K
300

Indoor


Profile recessed




PROFILE
COUNTUR
302




PROFILE
CENTRAL 1
304




PROFILE
CENTRAL 2
304




PROFILE
COUNTUR TRIM
305



PROFILE
MINI TRIM
305




PROFILE
IN
306




PROFILE
OUT
306




PROFILE
IN SURF
309



PROFILE
FLOOR IN
310




PROFILE
FLOOR IN
310



PROFILE
FLOOR
311

RIO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6480.10.930.WH	924	9	3000	>90	250	White
01.6480.10.930.BK	924	9	3000	>90	250	Black
01.6480.10.940.WH	989	9	4000	>90	250	White
01.6480.10.940.BK	989	9	4000	>90	250	Black

LED

CE

ENEC

IP44

50°

INCL

Ø65


80

MATERIAL | AL

i

» 318

RIO F1



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6480F1.10.930.WH	924	9	3000	>90	250	White
01.6480F1.10.930.BK	924	9	3000	>90	250	Black
01.6480F1.10.940.WH	989	9	4000	>90	250	White
01.6480F1.10.940.BK	989	9	4000	>90	250	Black

LED

CE

ENEC

IP44

50°

INCL


Ø65

80

MATERIAL | AL


i

» 318

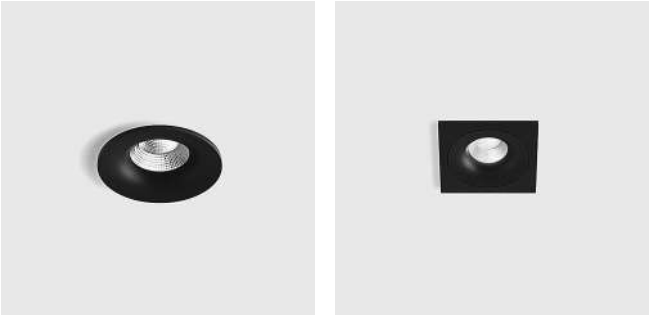

01.6480.10.930.BK 01.6480F1.10.930.BK

RIO F2



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6480F2.20.930.WH	2 x 924	2 x 9	3000	>90	250	White
01.6480F2.20.930.BK	2 x 924	2 x 9	3000	>90	250	Black
01.6480F2.20.940.WH	2 x 989	2 x 9	4000	>90	250	White
01.6480F2.20.940.BK	2 x 989	2 x 9	4000	>90	250	Black

LED

CE

ENEC

IP44

50°

INCL

155 x 65


80

MATERIAL | AL

i

» 318

RIO F3



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6480F3.30.930.WH	3 x 924	3 x 9	3000	>90	250	White
01.6480F3.30.930.BK	3 x 924	3 x 9	3000	>90	250	Black
01.6480F3.30.940.WH	3 x 989	3 x 9	4000	>90	250	White
01.6480F3.30.940.BK	3 x 989	3 x 9	4000	>90	250	Black

LED

CE

ENEC

IP44

50°

INCL

250 x 65

80

MATERIAL | AL


i

» 318




01.6480F2.20.930.BK 01.6480F3.30.930.BK

RIO A




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6490.10.930.WH	924	9	3000	>90	250	White
01.6490.10.930.BK	924	9	3000	>90	250	Black
01.6490.10.940.WH	989	9	4000	>90	250	White
01.6490.10.940.BK	989	9	4000	>90	250	Black



MATERIAL | AL » 318


RIO A F1



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6490F1.10.930.WH	924	9	3000	>90	250	White
01.6490F1.10.930.BK	924	9	3000	>90	250	Black
01.6490F1.10.940.WH	989	9	4000	>90	250	White
01.6490F1.10.940.BK	989	9	4000	>90	250	Black




MATERIAL | AL » 318

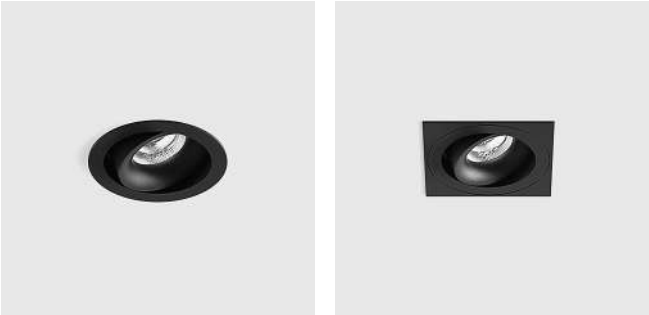


01.6490.10.930.BK 01.6490F1.10.930.BK

RIO A F2



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6490F2.20.930.WH	2 x 924	2 x 9	3000	>90	250	White
01.6490F2.20.930.BK	2 x 924	2 x 9	3000	>90	250	Black
01.6490F2.20.940.WH	2 x 989	2 x 9	4000	>90	250	White
01.6490F2.20.940.BK	2 x 989	2 x 9	4000	>90	250	Black



MATERIAL | AL » 318




01.6490F2.20.930.WH 01.6490F2.20.930.BK

Ceiling recessed

DROP IN



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.7754.13.930.GL	1041	13	3000	>90	350	Transparent
01.7754.13.940.GL	1041	13	4000	>90	350	Transparent




MATERIAL |  AL  GL

 » 318

Ceiling recessed



CELL



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2010.10.930.WH	924	9	3000	>90	250	White
01.2010.10.930.BK	924	9	3000	>90	250	Black
01.2010.10.940.WH	989	9	4000	>90	250	White
01.2010.10.940.BK	989	9	4000	>90	250	Black

LED


CE

ENEC

MATERIAL | AL

» 318

CELL 2



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.20F2.20.930.WH	2 x 924	2 x 9	3000	>90	250	White
01.20F2.20.930.BK	2 x 924	2 x 9	3000	>90	250	Black
01.20F2.20.940.WH	2 x 989	2 x 9	4000	>90	250	White
01.20F2.20.940.BK	2 x 989	2 x 9	4000	>90	250	Black

LED

CE



ENEC

MATERIAL | AL

» 318



CELL 3



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.20F3.30.930.WH	3 x 924	3 x 9	3000	>90	250	White
01.20F3.30.930.BK	3 x 924	3 x 9	3000	>90	250	Black
01.20F3.30.940.WH	3 x 989	3 x 9	4000	>90	250	White
01.20F3.30.940.BK	3 x 989	3 x 9	4000	>90	250	Black

LED

CE


ENEC

MATERIAL | AL

» 318




KARDAN 1



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6100.13.930.WHW	924	9	3000	>90	250	White/White
01.6100.13.930.WH	924	9	3000	>90	250	White
01.6100.13.930.BK	924	9	3000	>90	250	Black
01.6100.13.940.WHW	989	9	4000	>90	250	White/White
01.6100.13.940.WH	989	9	4000	>90	250	White
01.6100.13.940.BK	989	9	4000	>90	250	Black

LED CE ENE IP20 INCL 102 x 102 90 50° Tilt Rotate MATERIAL | AL [i](#) » 318

KARDAN 2



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.6110.26.930.WHW	2 x 924	2 x 9	3000	>90	250	White/White
01.6110.26.930.WH	2 x 924	2 x 9	3000	>90	250	White
01.6110.26.930.BK	2 x 924	2 x 9	3000	>90	250	Black
01.6110.26.940.WHW	2 x 989	2 x 9	4000	>90	250	White/White
01.6110.26.940.WH	2 x 989	2 x 9	4000	>90	250	White
01.6110.26.940.BK	2 x 989	2 x 9	4000	>90	250	Black

LED CE ENE IP20 INCL 202 x 102 90 50° Tilt Rotate MATERIAL | AL [i](#) » 318



01.6110.26.930.WHW




01.6110.26.930.WH



01.6110.26.930.BK



INVISIBLE SQUARE




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2212.9.930.WH	924	9	3000	>90	250	White
01.2212.9.930.BK	924	9	3000	>90	250	Black
01.2212.9.940.WH	989	9	4000	>90	250	White
01.2212.9.940.BK	989	9	4000	>90	250	Black



MATERIAL | AL

» 318

INVISIBLE MINI R



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2200.7.930.WH	640	6,3	3000	>90	350	White
01.2200.7.930.BK	640	6,3	3000	>90	350	Black
01.2200.7.930.BR	640	6,3	3000	>90	350	Brass
01.2200.7.940.WH	640	6,3	4000	>90	350	White
01.2200.7.940.BK	640	6,3	4000	>90	350	Black
01.2200.7.940.BR	640	6,3	4000	>90	350	Brass



MATERIAL | AL

» 318



01.2200.7.930.WH



01.2200.7.930.BK




01.2200.7.930.BR



Ceiling recessed

TUB M TRIMLESS



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0597.11.930.WH	1210	11	3000	>90	300	White
01.0597.11.930.BK	1210	11	3000	>90	300	Black
01.0597.11.940.WH	1210	11	4000	>90	300	White
01.0597.11.940.BK	1210	11	4000	>90	300	Black

ACCESSORIES

	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30


» 313



MATERIAL | AL

» 318

TUB M TRIM



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0599.11.930.WH	1210	11	3000	>90	300	White
01.0599.11.930.BK	1210	11	3000	>90	300	Black
01.0599.11.940.WH	1210	11	4000	>90	300	White
01.0599.11.940.BK	1210	11	4000	>90	300	Black

ACCESSORIES

	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 313



MATERIAL | AL


» 318

Ceiling recessed



R-GROUP STUDIO. OKSANA ROZHKOVA

TUB M R



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0598.11.930.WH	1210	11	3000	>90	300	White
01.0598.11.930.BK	1210	11	3000	>90	300	Black
01.0598.11.940.WH	1210	11	4000	>90	300	White
01.0598.11.940.BK	1210	11	4000	>90	300	Black

ACCESSORIES

	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 313




MATERIAL | AL

» 318




Ceiling recessed

TUB M IN




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0590.9.930.WH	1210	9	3000	>90	250	White
01.0590.9.930.BK	1210	9	3000	>90	250	Black
01.0590.9.940.WH	1321	9	4000	>90	250	White
01.0590.9.940.BK	1321	9	4000	>90	250	Black




MATERIAL | AL » 318

TUB M INT



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0592.9.930.WH	1210	9	3000	>90	250	White
01.0592.9.930.BK	1210	9	3000	>90	250	Black
01.0592.9.940.WH	1321	9	4000	>90	250	White
01.0592.9.940.BK	1321	9	4000	>90	250	Black



MATERIAL | AL » 318



01.0592.9.930.WH+06.A05SH.BR



01.0592.9.930.BK + 06.A05SH.BR



01.0592.9.930.WH+06.A05SH.CP



01.0592.9.930.BK+06.A05SH.CP

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30


» 313

Ceiling recessed



Ceiling recessed

TUB S OUT



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0303.4.930.WH	340	4	3000	>90	350	White
01.0303.4.930.BK	340	4	3000	>90	350	Black
01.0303.4.930.BR/BK	340	4	3000	>90	350	Brass /Black

LED

CE

ERC

IP20

MATERIAL | AL

» 318



01.0303.4.930.WH



01.0303.4.930.BK




01.0303.4.930.BR/BK

Ceiling recessed



TUB M OUT TRIMLESS



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0594.9.930.WH	1210	12	3000	>90	300	White
01.0594.9.930.BK	1210	12	3000	>90	300	Black
NEW 01.0594.9.930.BR	1210	12	3000	>90	300	Brass
01.0594.9.940.WH	1210	12	4000	>90	300	White
01.0594.9.940.BK	1210	12	4000	>90	300	Black
NEW 01.0594.9.940.BR	1210	12	4000	>90	300	Brass

LED

CE

ERC

IP20

INCL

Ø100

70

50°

Tilt

Rotate


MATERIAL |

AL

i

 » 318

TUB M OUT



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0593.9.930.WH	1210	12	3000	>90	300	White
01.0593.9.930.BK	1210	12	3000	>90	300	Black
NEW 01.0593.9.930.BR	1210	12	3000	>90	300	Brass
01.0593.9.940.WH	1210	12	4000	>90	300	White
01.0593.9.940.BK	1210	12	4000	>90	300	Black
NEW 01.0593.9.940.BR	1210	12	4000	>90	300	Brass

LED

CE

ERC

IP20

INCL

Ø100

70

50°

Tilt

Rotate

MATERIAL |

AL

i

 » 318



01.0593.9.930.WH




01.0593.9.930.BK



01.0593.9.930.BR

TUB M OUT NB TRIMLESS



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
01.0595.9.930.WH	750	9	3000	>90	220	White

LED

CE

ERC

IP20

INCL

Ø100

70

6°

Tilt

Rotate


MATERIAL |

AL

i

 » 318

TUB M OUT NB



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
01.0596.9.930.WH	750	9	3000	>90	220	White

LED

CE

ERC

IP20

INCL

Ø100

70

6°

Tilt

Rotate

MATERIAL |

AL


i

 » 318

SOL IN MINI




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.7526.7.930.WH	624	7	3000	>90	350	White
01.7526.7.930.BK	624	7	3000	>90	350	Black
01.7526.7.940.WH	624	7	4000	>90	350	White
01.7526.7.940.BK	624	7	4000	>90	350	Black



MATERIAL | AL

» 318



ACCESSORIES

	Replaceable ring. White color	SOL M RING WHITE
	Replaceable ring. Black color	SOL M RING BLACK
	Replaceable ring. Copper color	SOL M RING COPPER
	Replaceable ring. Brass color	SOL M RING BRASS
	Replaceable ring. Chrome color	SOL M RING CHROME
	Replaceable ring. Diamond black color	SOL M RING DIAMOND BLACK

NEW

» 313



01.7526.7.930.WH + SOL M RING BRASS



01.7526.7.930.WH + SOL M RING COPPER



01.7526.7.930.WH + SOL M RING CHROME



01.7526.7.930.WH + SOL M RING DIAMOND BLACK



01.7526.7.930.BK + SOL M RING BRASS



01.7526.7.930.BK + SOL M RING COPPER



01.7526.7.930.BK + SOL M RING CHROME




01.7526.7.930.BK + SOL M RING DIAMOND BLACK

SOL IN




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.9533.14.930.WH	1425	14	3000	>90	350	White
01.9533.14.930.BK	1425	14	3000	>90	350	Black
01.9533.14.940.WH	1425	14	4000	>90	350	White
01.9533.14.940.BK	1425	14	4000	>90	350	Black



MATERIAL | AL

» 318



ACCESSORIES

	Replaceable ring. White color	SOL RING WHITE
	Replaceable ring. Black color	SOL RING BLACK
	Replaceable ring. Copper color	SOL RING COPPER
	Replaceable ring. Brass color	SOL RING BRASS
	Replaceable ring. Chrome color	SOL RING CHROME
	Replaceable ring. Diamond black color	SOL RING DIAMOND BLACK

NEW

	Lens 12°	06.A09LS12
--	----------	------------

» 313



01.9533.14.930.WH + SOL RING BRASS



01.9533.14.930.WH + SOL RING COPPER



01.9533.14.930.WH + SOL RING CHROME



01.9533.14.930.WH + SOL RING DIAMOND BLACK



01.9533.14.930.BK + SOL RING BRASS



01.9533.14.930.BK + SOL RING COPPER




01.9533.14.930.BK + SOL RING CHROME



01.9533.14.930.BK + SOL RING DIAMOND BLACK


NANO COLLECTION

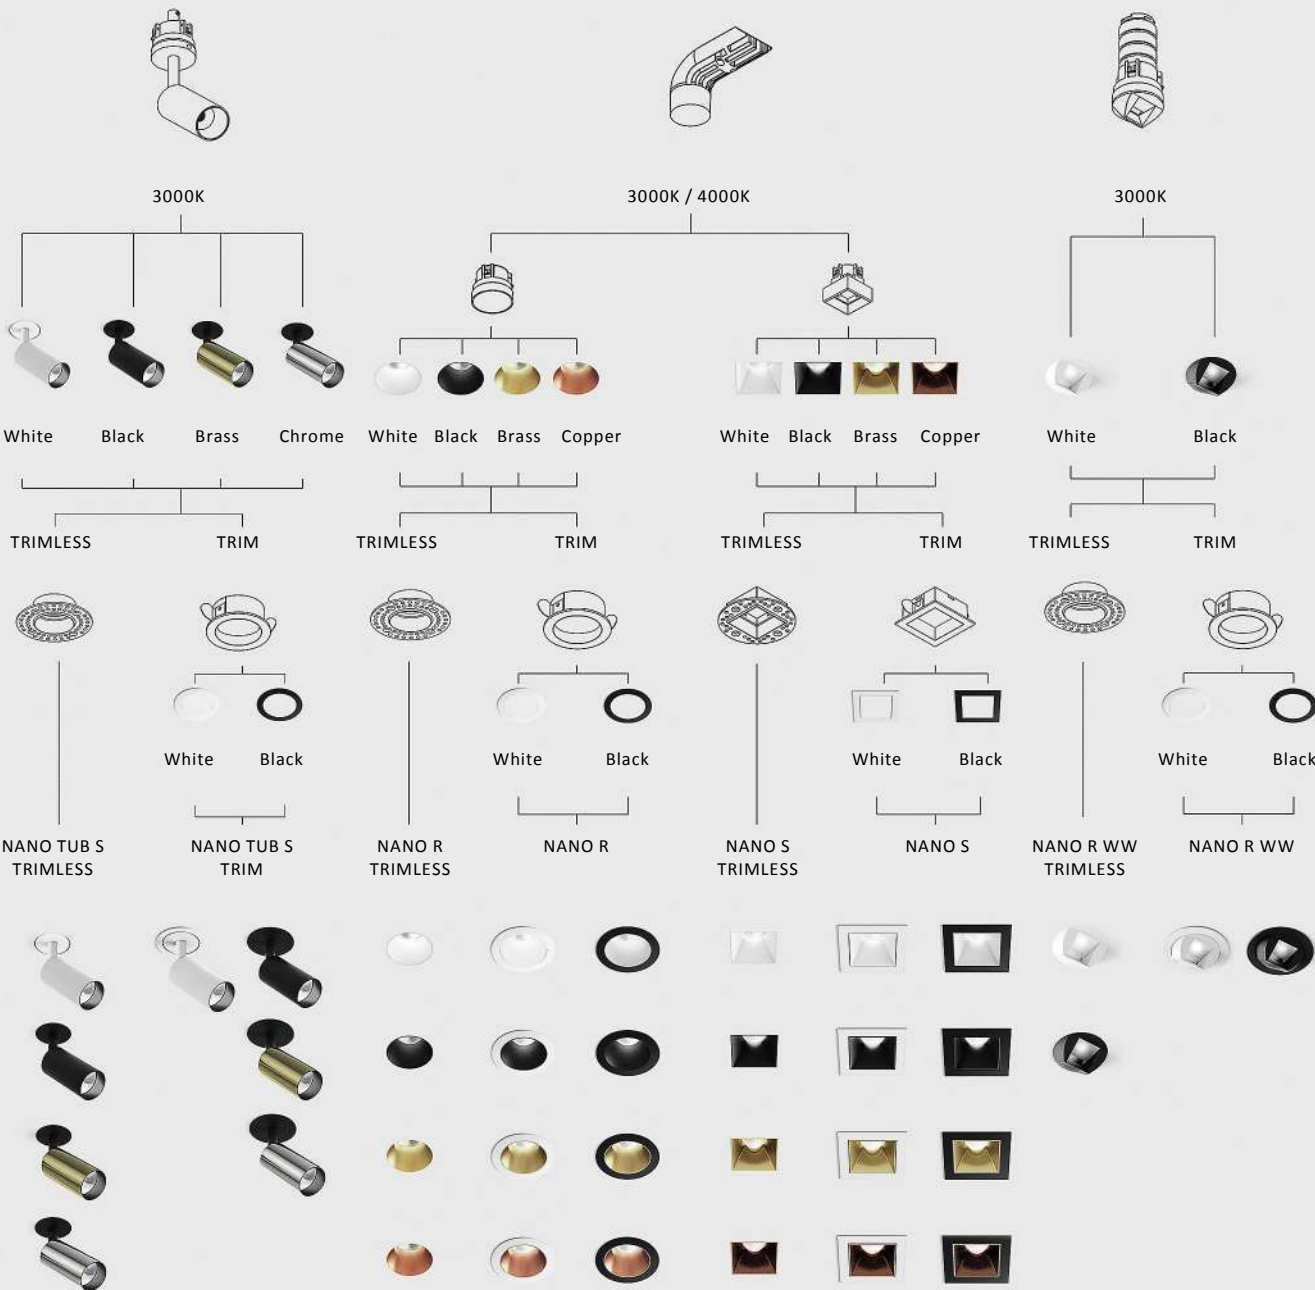

NANO COLLECTION



NANO TUB S TRIMLESS



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3904.7.930.WH	491	4,5	3000	>90	500	White
01.3904.7.930.WHB	491	4,5	3000	>90	500	White/Black
01.3904.7.930.BK	491	4,5	3000	>90	500	Black
01.3904.7.930.BR	491	4,5	3000	>90	500	Brass
01.3904.7.930.CR	491	4,5	3000	>90	500	Chrome

LED

CE


ERC

IP20

MATERIAL | AL

» 318

NANO TUB S TRIM



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3905.7.930.WH	491	4,5	3000	>90	500	White
01.3905.7.930.WHB	491	4,5	3000	>90	500	White/Black
01.3905.7.930.BK	491	4,5	3000	>90	500	Black
01.3905.7.930.BR	491	4,5	3000	>90	500	Brass
01.3905.7.930.CR	491	4,5	3000	>90	500	Chrome

LED

CE

ERC

IP20

MATERIAL | AL

» 318



01.3904.7.930.WH



01.3904.7.930.WHB



01.3904.7.930.BK



01.3904.7.930.BR



01.3904.7.930.CR



01.3905.7.930.WH



01.3905.7.930.WHB



01.3905.7.930.BK



01.3905.7.930.BR




01.3905.7.930.CR



Ceiling recessed

NANO R TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3900.8.930.WH	640	8	3000	>90	700	White
01.3900.8.930.BK	640	8	3000	>90	700	Black
01.3900.8.930.BR	640	8	3000	>90	700	Brass
01.3900.8.930.CP	640	8	3000	>90	700	Copper
01.3900.8.940.WH	640	8	4000	>90	700	White
01.3900.8.940.BK	640	8	4000	>90	700	Black
01.3900.8.940.BR	640	8	4000	>90	700	Brass
01.3900.8.940.CP	640	8	4000	>90	700	Copper



MATERIAL | AL PC » 318

NANO R



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3910.8.930.WH	640	8	3000	>90	700	White
01.3910.8.930.BK	640	8	3000	>90	700	Black
01.3910.8.940.WH	640	8	4000	>90	700	White
01.3910.8.940.BK	640	8	4000	>90	700	Black



MATERIAL | AL » 318



ACCESSORIES

	Shield Brass	01.A390.BR
	Shield Copper	01.A390.CP
	Shield Black	01.A390.BK
	Shield White	01.A390.WH
	Lens 12°	01.A39LS12
	Lens 30°	01.A39LS30


» 313

Ceiling recessed



Ceiling recessed

NANO S TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3901.8.930.WH	640	8	3000	>90	700	White
01.3901.8.930.BK	640	8	3000	>90	700	Black
01.3901.8.930.BR	640	8	3000	>90	700	Brass
01.3901.8.930.CP	640	8	3000	>90	700	Copper
01.3901.8.940.WH	640	8	4000	>90	700	White
01.3901.8.940.BK	640	8	4000	>90	700	Black
01.3901.8.940.BR	640	8	4000	>90	700	Brass
01.3901.8.940.CP	640	8	4000	>90	700	Copper



MATERIAL | AL PC » 318


NANO S



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3911.8.930.WH	640	8	3000	>90	700	White
01.3911.8.930.BK	640	8	3000	>90	700	Black
01.3911.8.940.WH	640	8	4000	>90	700	White
01.3911.8.940.BK	640	8	4000	>90	700	Black



MATERIAL | AL » 318

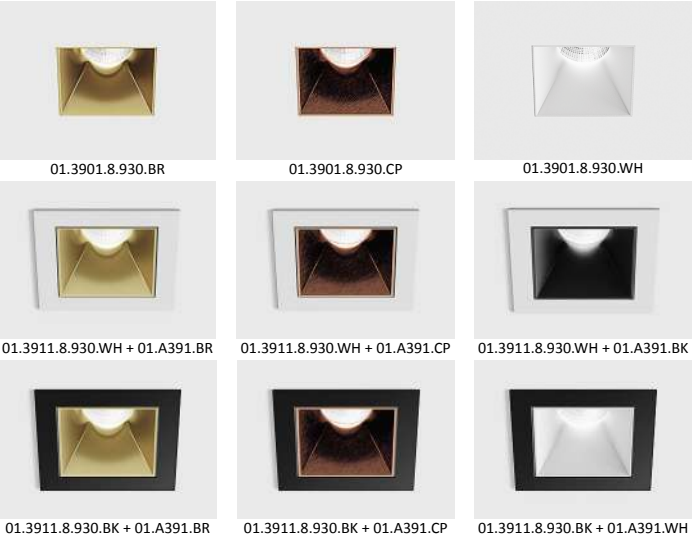


ACCESSORIES	
Shield Brass	01.A391.BR
Shield Copper	01.A391.CP
Shield Black	01.A391.BK
Shield White	01.A391.WH
Lens 12°	01.A39LS12
Lens 30°	01.A39LS30

» 313

Ceiling recessed



NANO R WW TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3902.6.930.WH	503	6	3000	>90	500	White
01.3902.6.930.BK	503	6	3000	>90	500	Black



MATERIAL | AL PC

» 318

NANO R WW




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3912.6.930.WH	503	6	3000	>90	500	White
01.3912.6.930.BK	503	6	3000	>90	500	Black



MATERIAL | AL

» 318

NANO S WW TRIMLESS





Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3903.6.930.WH	503	6	3000	>90	500	White
01.3903.6.930.BK	503	6	3000	>90	500	Black



MATERIAL | AL PC

» 318

NANO S WW



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3913.6.930.WH	503	6	3000	>90	500	White
01.3913.6.930.BK	503	6	3000	>90	500	Black



MATERIAL | AL


» 318

SERIES VARIO

VARIO LINEA



VARIO COMFORT

VARIO WALL WASHER

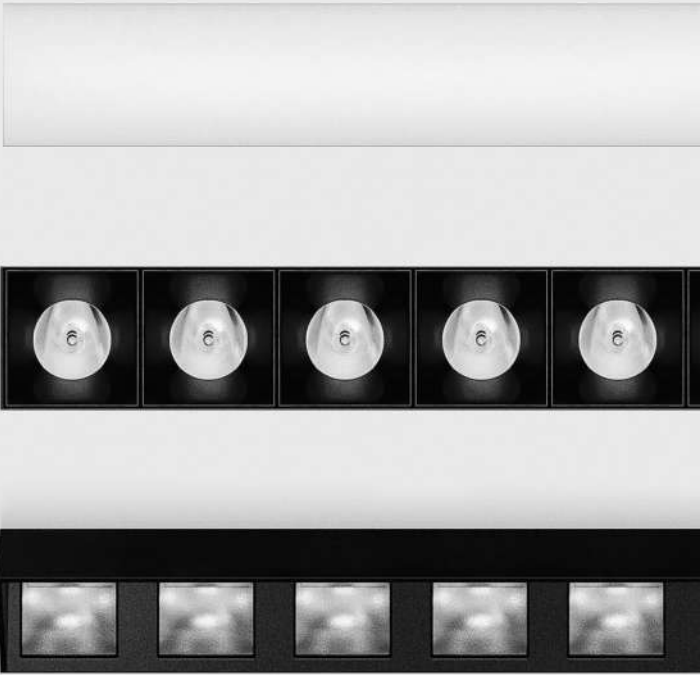

Ceiling recessed

VARIO LINEA 151 TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.1510.4.930.WH + VARIO FRAME2	585	4,2	3000	>90	350	White
01.1510.4.930.BK + VARIO FRAME2	585	4,2	3000	>90	350	Black
01.1510.4.940.WH + VARIO FRAME2	585	4,2	4000	>90	350	White
01.1510.4.940.BK + VARIO FRAME2	585	4,2	4000	>90	350	Black





MATERIAL | AL PC

i » 318



VARIO LINEA 218 TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2180.6.930.WH + VARIO FRAME3	754	6,3	3000	>90	350	White
01.2180.6.930.BK + VARIO FRAME3	754	6,3	3000	>90	350	Black
01.2180.6.940.WH + VARIO FRAME3	754	6,3	4000	>90	350	White
01.2180.6.940.BK + VARIO FRAME3	754	6,3	4000	>90	350	Black





MATERIAL | AL PC

i » 318



VARIO LINEA 151



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.1510.4.930.WH	585	4,2	3000	>90	350	White
01.1510.4.930.BK	585	4,2	3000	>90	350	Black
01.1510.4.940.WH	585	4,2	4000	>90	350	White
01.1510.4.940.BK	585	4,2	4000	>90	350	Black

LED

CE

ErC

IP20



147 x 32

70

110°

MATERIAL | AL PC

VARIO LINEA 218



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2180.6.930.WH	754	6,3	3000	>90	350	White
01.2180.6.930.BK	754	6,3	3000	>90	350	Black
01.2180.6.940.WH	754	6,3	4000	>90	350	White
01.2180.6.940.BK	754	6,3	4000	>90	350	Black

LED

CE

ErC


IP20

214 x 32

70

110°


MATERIAL | AL PC

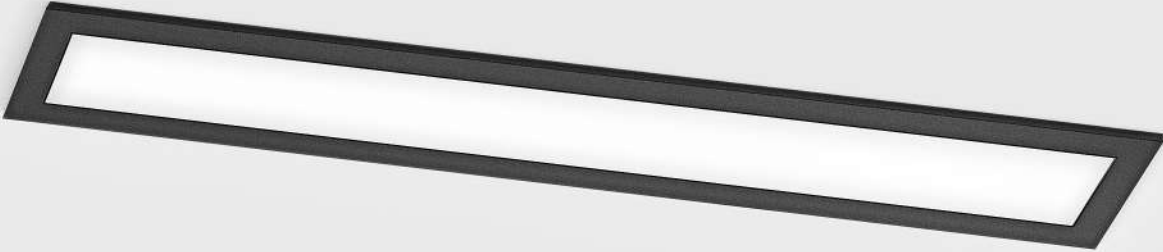

VARIO COMFORT 85 TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0851.4.930.BK + VARIO FRAME1	336	4,5	3000	>90	500	Black
01.0851.4.940.BK + VARIO FRAME1	336	4,5	4000	>90	500	Black



LEDCEERCEIP20INCL83 x 327036°

MATERIAL | ALPC


i » 318



VARIO COMFORT 85




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.0851.4.930.BK	336	4,5	3000	>90	500	Black
01.0851.4.940.BK	336	4,5	4000	>90	500	Black



LEDCEERCEIP20INCL79 x 327036°

MATERIAL | ALPC


i » 318



VARIO COMFORT 151 TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.1511.9.930.BK + VARIO FRAME2	672	9	3000	>90	500	Black
01.1511.9.940.BK + VARIO FRAME2	672	9	4000	>90	500	Black




LEDCEERCEIP20INCL151 x 327036°

MATERIAL | ALPC


i » 318



VARIO COMFORT 151




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.1511.9.930.BK	672	9	3000	>90	500	Black
01.1511.9.940.BK	672	9	4000	>90	500	Black



LEDCEERCEIP20INCL147 x 327036°

MATERIAL | ALPC


i » 318



VARIO COMFORT 218 TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2181.14.930.BK + VARIO FRAME3	1005	14	3000	>90	500	Black
01.2181.14.940.BK + VARIO FRAME3	1040	14	4000	>90	500	Black




LEDCEERCEIP20INCL223 x 327036°

MATERIAL | ALPC


i » 318



VARIO COMFORT 218




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2181.14.930.BK	1005	14	3000	>90	500	Black
01.2181.14.940.BK	1040	14	4000	>90	500	Black




LEDCEERCEIP20INCL214 x 327036°

MATERIAL | ALPC

i » 318



VARIO WALL WASHER 218 TRIMLESS




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2185.10.930.BK + VARIO FRAME3	720	10	3000	>90	350	Black
01.2185.10.940.BK + VARIO FRAME3	720	10	4000	>90	350	Black
01.2185.14.930.BK + VARIO FRAME3	1010	14	3000	>90	500	Black
01.2185.14.940.BK + VARIO FRAME3	1010	14	4000	>90	500	Black


LED CE ENEC IP20 INCL 223 x 32 70 48 x 25°

MATERIAL | AL PC

i » 318



VARIO WALL WASHER 218




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.2185.10.930.BK	720	10	3000	>90	350	Black
01.2185.10.940.BK	720	10	4000	>90	350	Black
01.2185.14.930.BK	1010	14	3000	>90	500	Black
01.2185.14.940.BK	1010	14	4000	>90	500	Black

LED CE ENEC IP20 INCL 214 x 32 70 48 x 25°

MATERIAL | AL PC

i » 318




IN WALL RING



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
01.3853.R1.830.ST	20	1	3000	>80	24	Stainless steel

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | INOX PC


ⓘ » 318

IN WALL O




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
01.3805.EL.930.WH	364	3,3	3000	>90	700	White
01.3805.EL.930.BK	364	3,3	3000	>90	700	Black

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 318

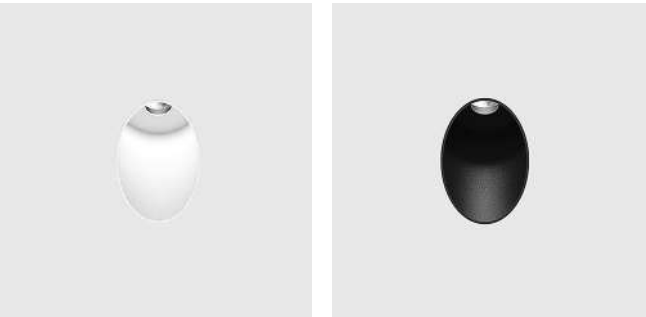


01.3805.EL.930.WH

01.3805.EL.930.BK



Wall surface

BUTTON RS





Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.0150.8.930.CG	720	8	3000	>90	220	Champagne gold



MATERIAL | AL PC

» 318

BUTTON RM




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.0220.14.930.CG	960	14	3000	>90	220	Champagne gold



MATERIAL | AL PC


» 318

Wall surface

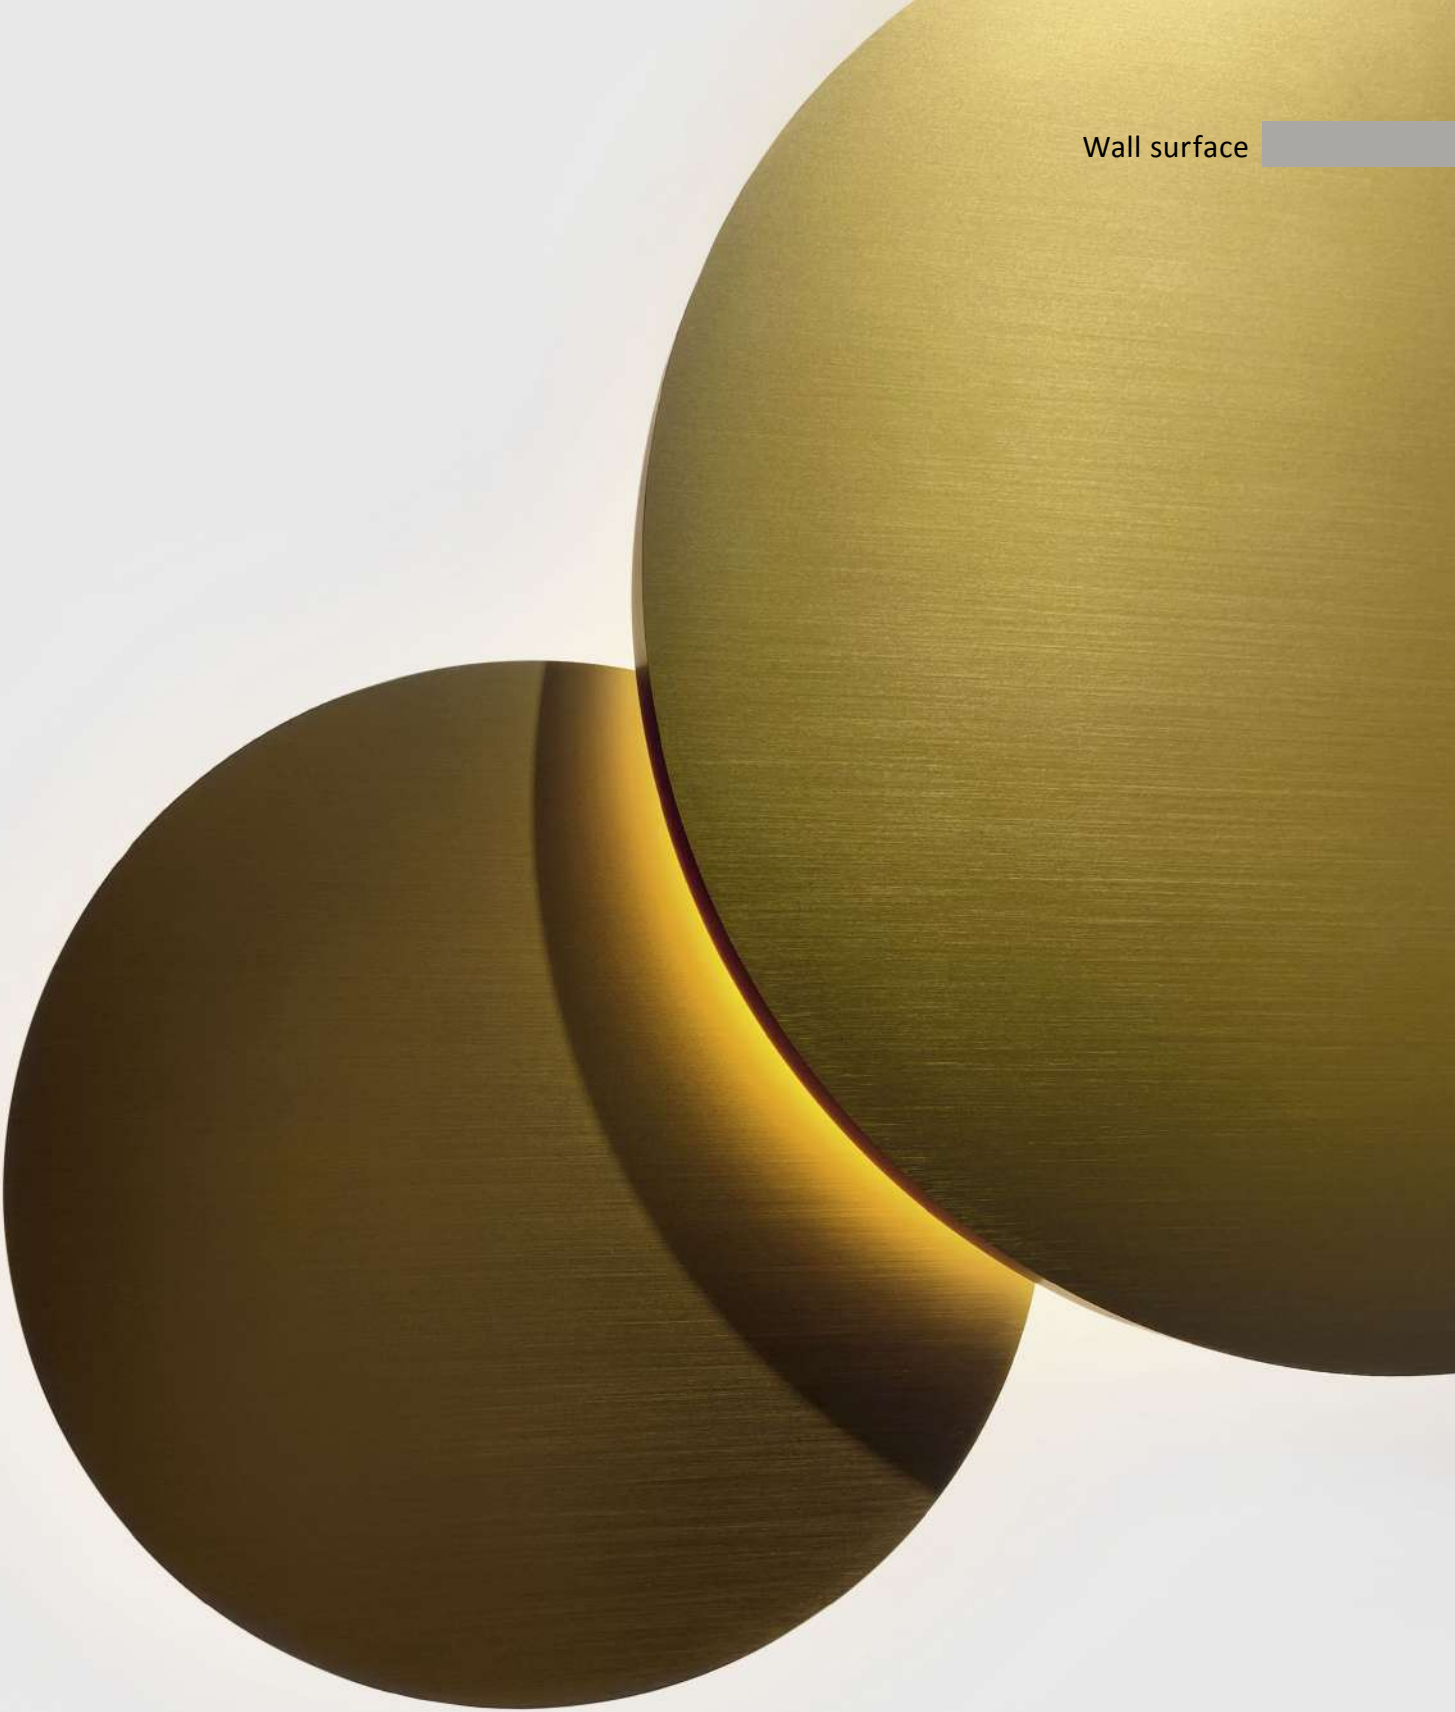

Wall recessed

BUTTON SM




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.0200.15.930.BK	720	14,4	3000	>90	220	Black




MATERIAL |  AL  PC

 » 318

Wall recessed

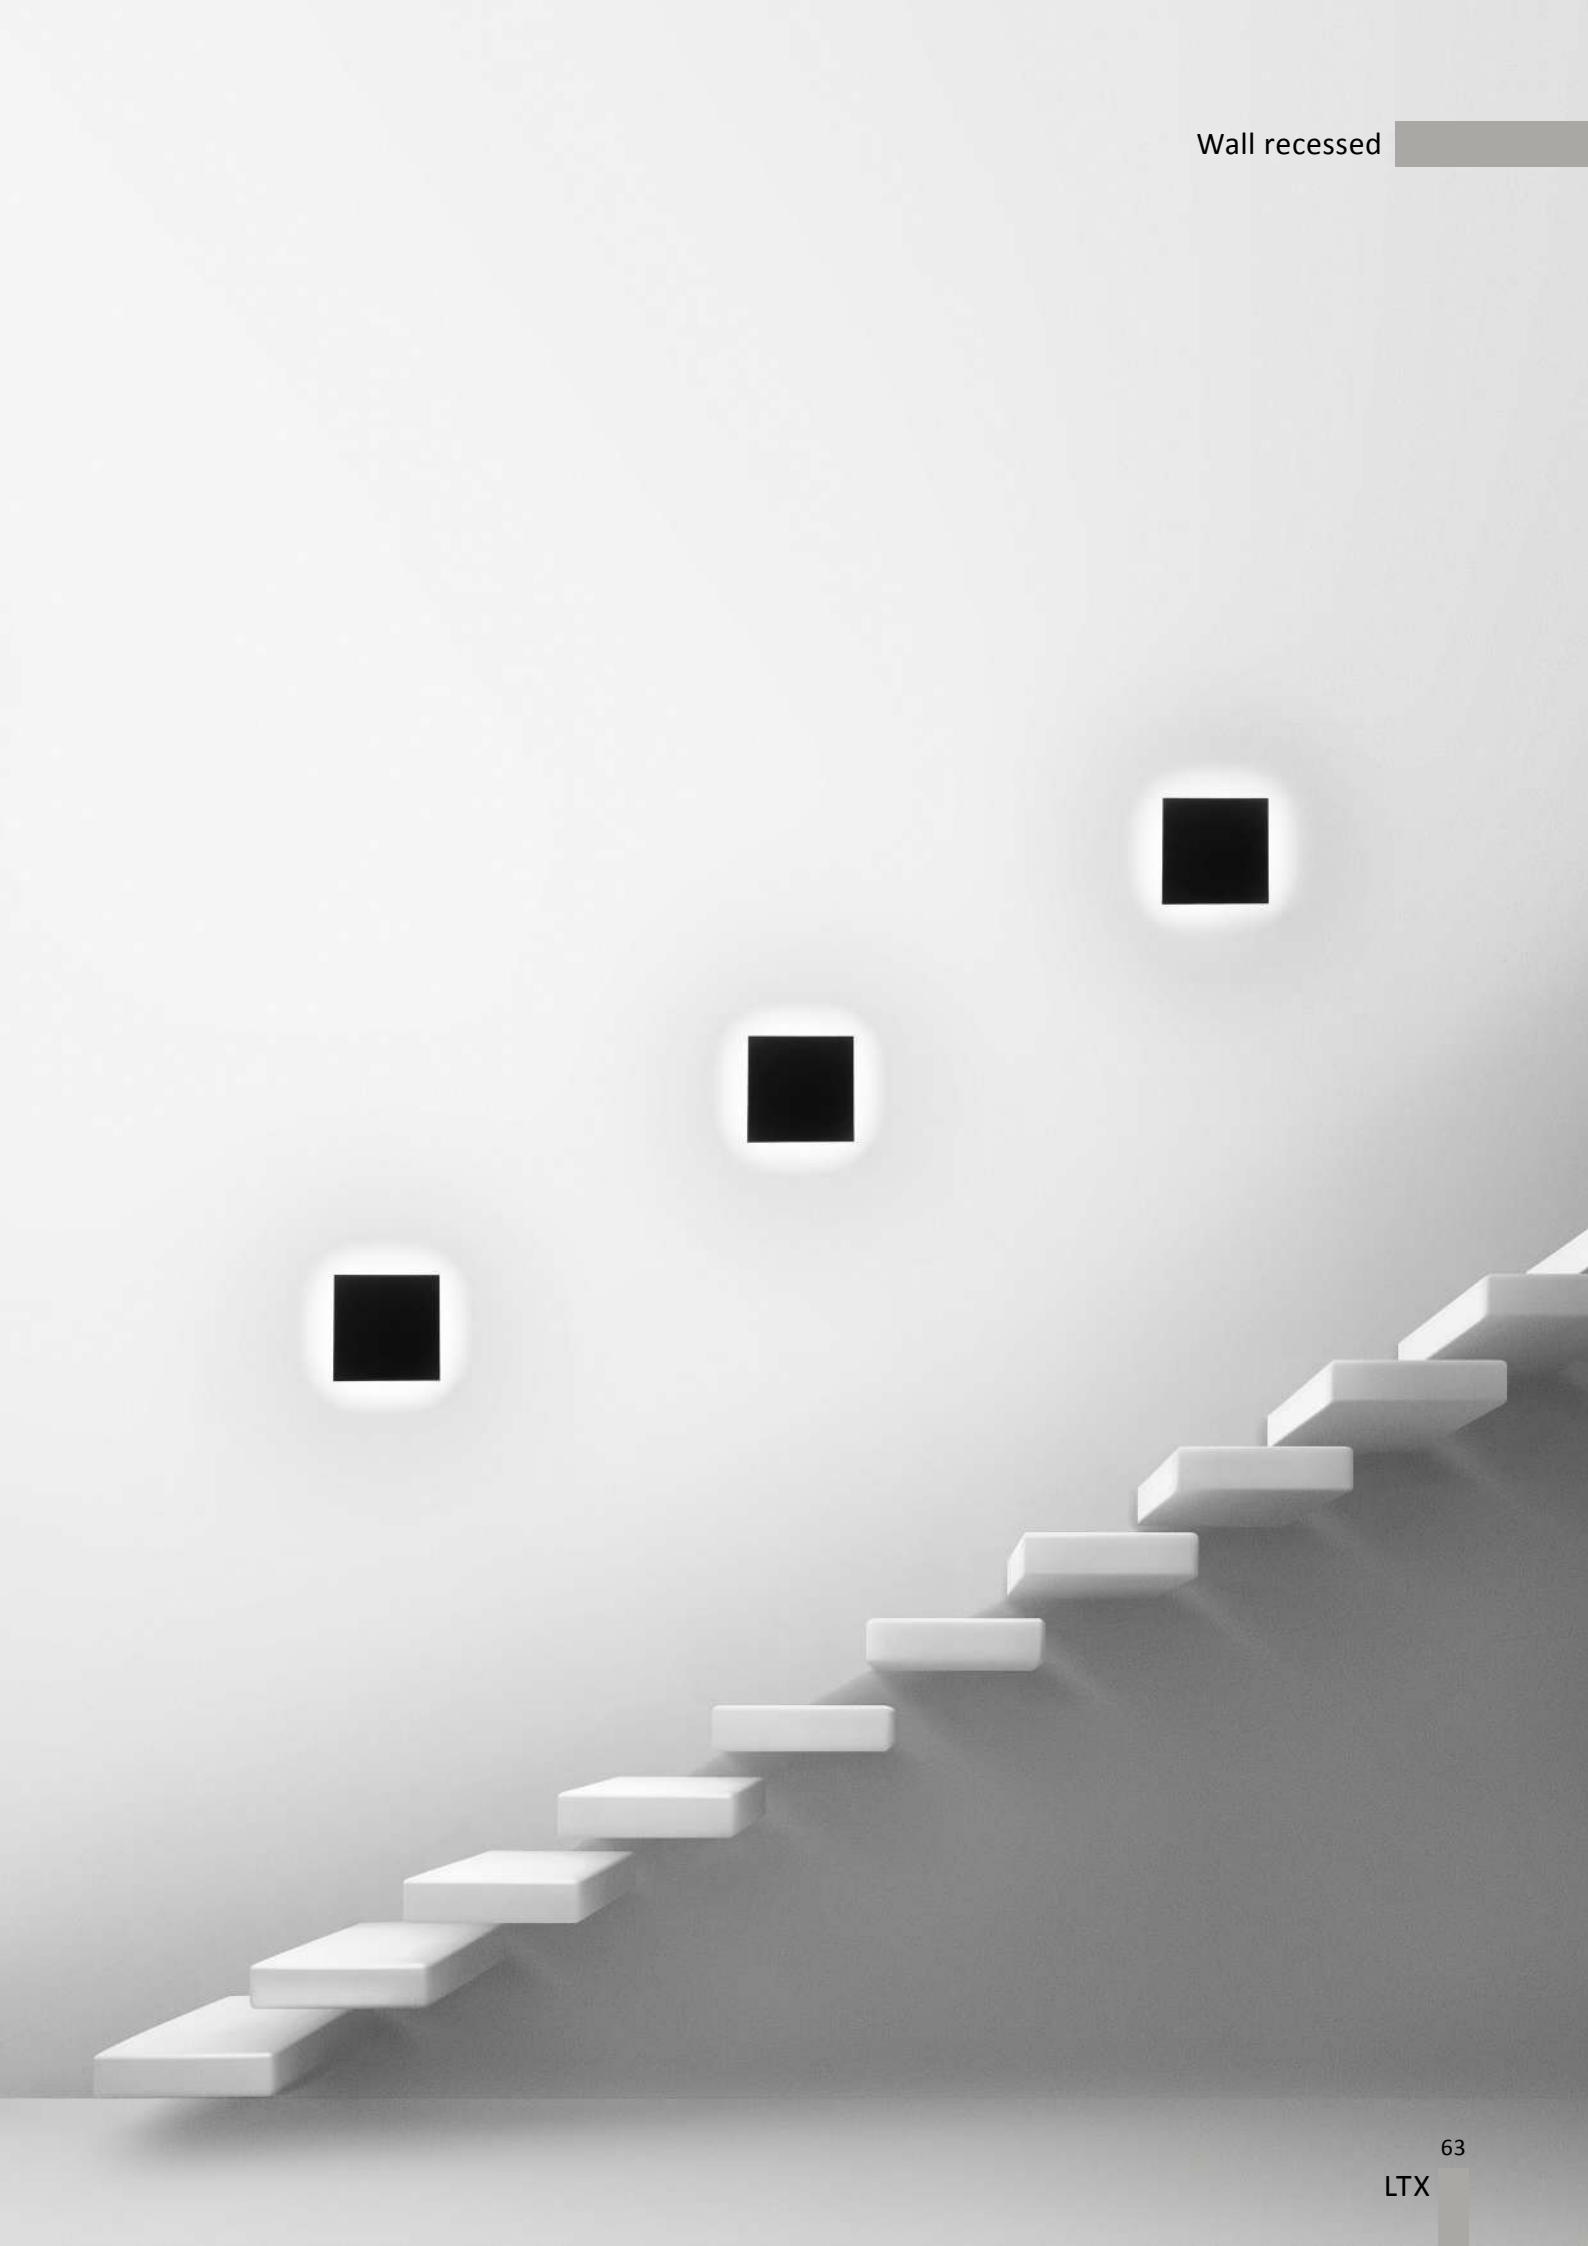

STRAIGHT




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.7015.1.930.WH	1800	18	3000	>90	48	White
02.7015.1.930.BK	1800	18	3000	>90	48	Black

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

» 318



STRAIGHT




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.7015.2.930.WH	3600	36	3000	>90	48	White
02.7015.2.930.BK	3600	36	3000	>90	48	Black

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

» 318



Wall surface




Wall surface

ROD

ROD series surface mounted luminaires.
You can create your own unique experiences
by using different sizes of ROD series of lights.

ROD




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1000.10.930.BK	630	10,5	3000	>90	220	Black



MATERIAL | AL PC » 318

ROD




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1500.17.930.BK	1080	18	3000	>90	220	Black



MATERIAL | AL PC » 318

ROD




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1990.23.930.BK	1500	25	3000	>90	220	Black



MATERIAL | AL PC » 318

ROD




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.2483.30.930.BK	1800	30	3000	>90	220	Black





MATERIAL | AL PC » 318

SLIMLINE

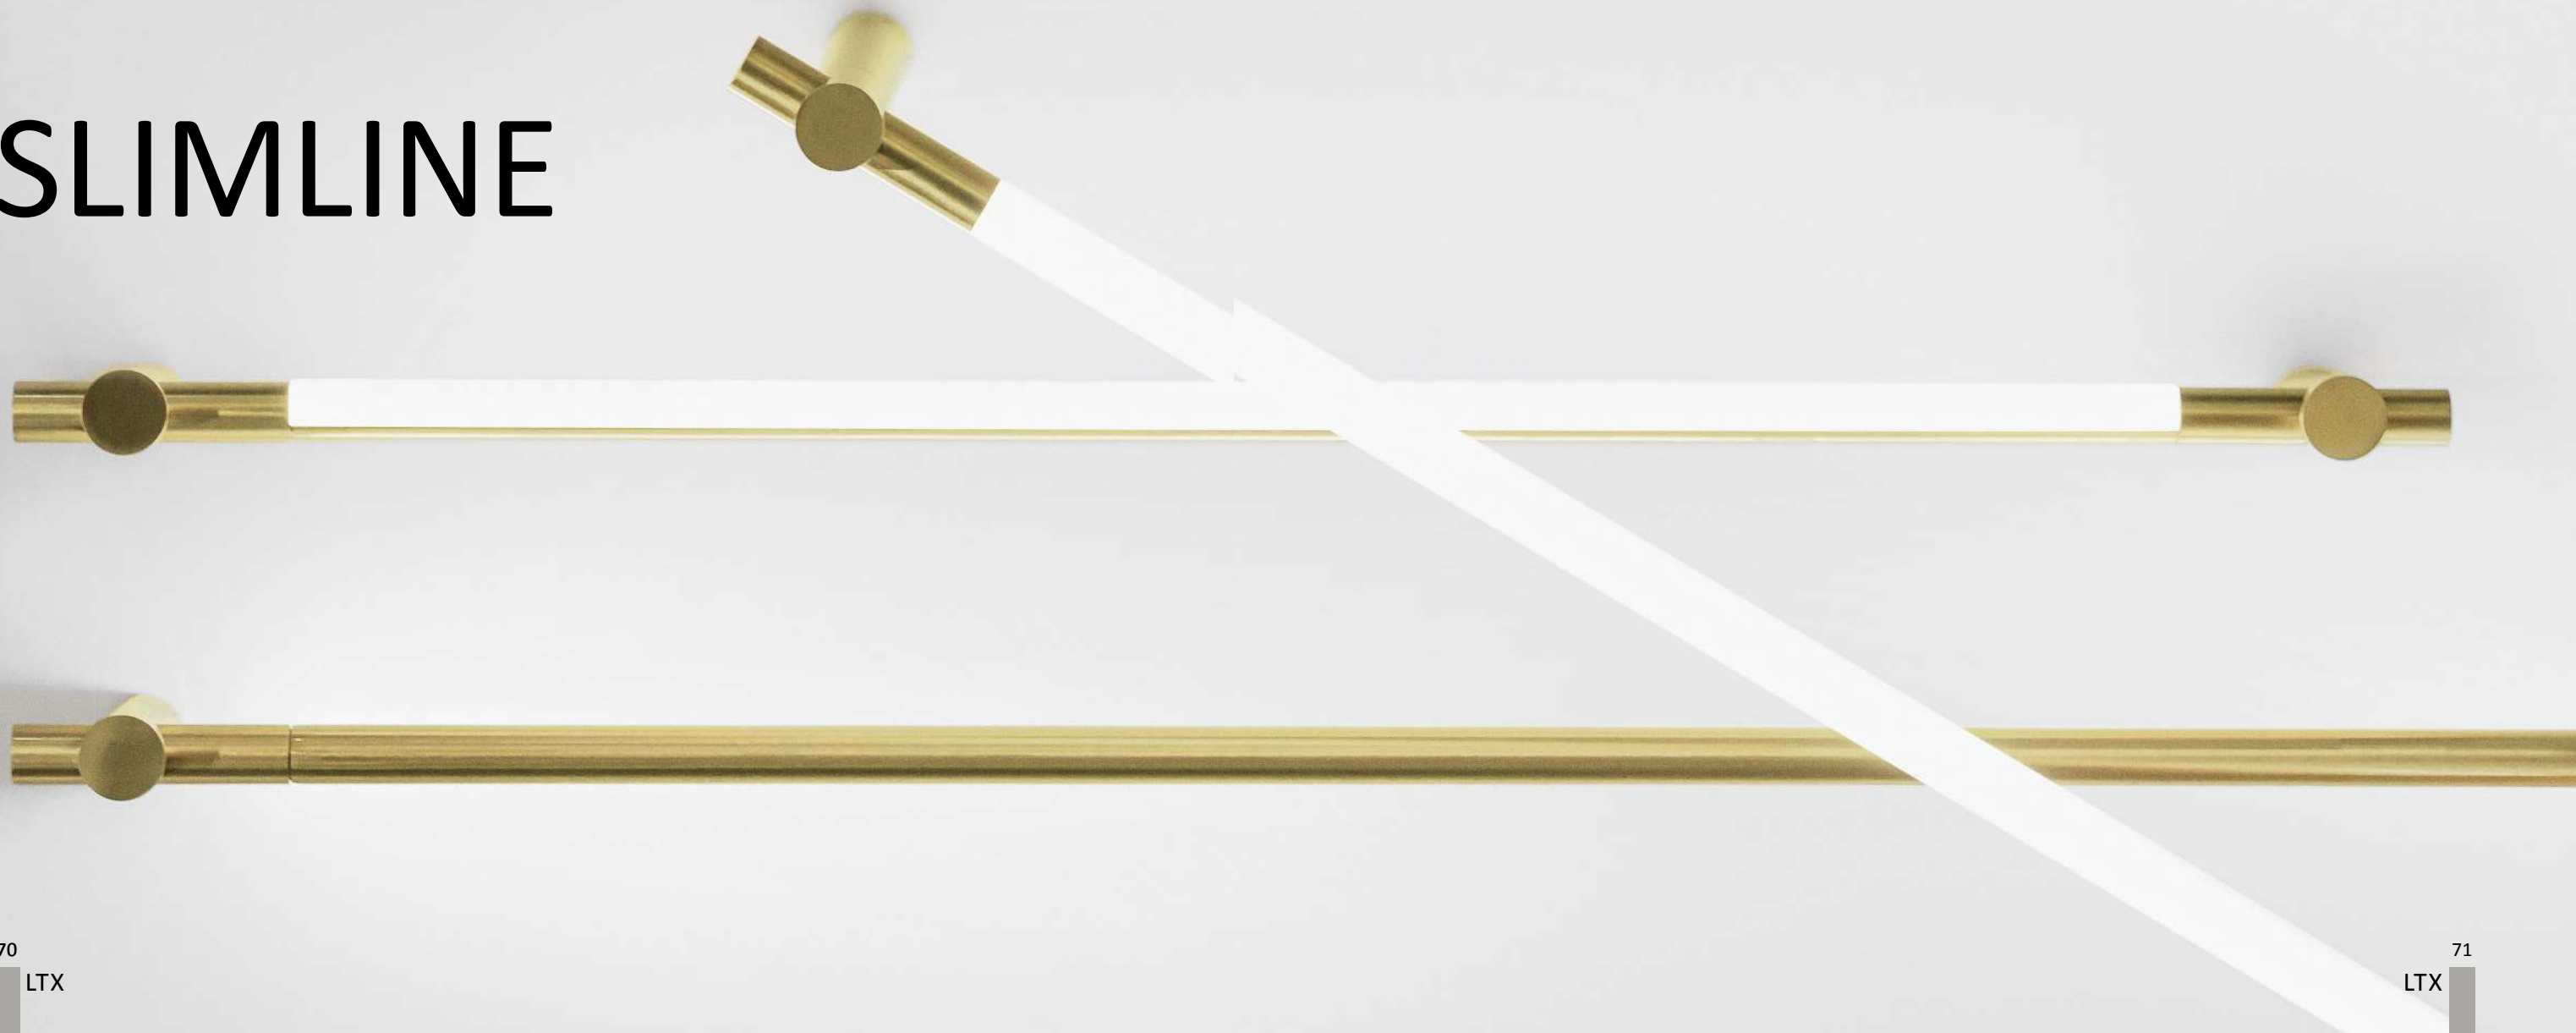

SLIMLINE



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1807.5.930.BR	400	5	3000	>90	48	Brass


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 318

SLIMLINE



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1810.8.930.BR	640	8	3000	>90	48	Brass



ⓘ DRIVER MUST BE PLACED ON REMOTE




MATERIAL | BR PC

ⓘ » 318

ACCESSORIES

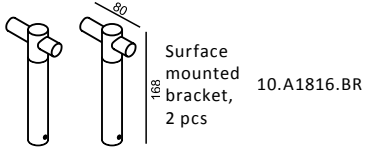

SLIMLINE



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1812.10.930.BR	800	10	3000	>90	48	Brass


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 318

SLIMLINE



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1818.15.930.BR	1200	15	3000	>90	48	Brass



ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC


ⓘ » 318

ACCESSORIES

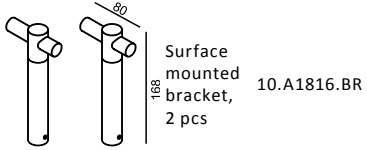


Wall surface

SFERA WALL S



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.0613.4.930.BK	243	4	3000	>90	220	Black
10.0613.4.930.BR	243	4	3000	>90	220	Brass



MATERIAL | AL GL

» 318



10.0613.4.930.BK



10.0613.4.930.BR


Wall surface



SFERA WALL M



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.0634.5.930.BK	243 + 119	3,6 + 1,5	3000	>90	220	Black
10.0634.5.930.BR	243 + 119	3,6 + 1,5	3000	>90	220	Brass



MATERIAL | AL GL

» 318




10.0634.5.930.BK



10.0634.5.930.BR




TOUCH TO DIMM

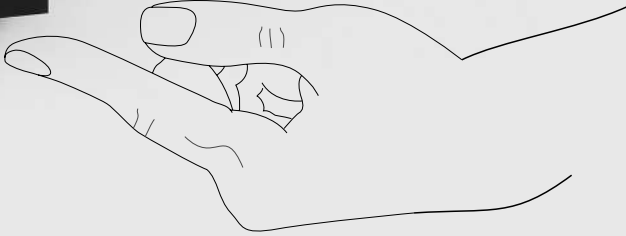

Ceiling surface

TUB M S 110



	Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
	02.0511.9.930.WH	540	9	3000	>90	250	White
	02.0511.9.930.BK	540	9	3000	>90	250	Black
	02.0511.9.930.BR	540	9	3000	>90	250	Brass
NEW	02.0511.9.930.DB	540	9	3000	>90	250	Diamond black
	02.0511.9.940.WH	540	9	4000	>90	250	White
	02.0511.9.940.BK	540	9	4000	>90	250	Black
	02.0511.9.940.BR	540	9	4000	>90	250	Brass
NEW	02.0511.9.940.DB	540	9	4000	>90	250	Diamond black



MATERIAL | AL

» 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 313



02.0511.9.930.WH



02.0511.9.930.BK



02.0511.9.930.BR




02.0511.9.930.DB

Ceiling surface



TUB M SA 90



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.0591.9.930.WH	540	9	3000	>90	250	White
02.0591.9.930.BK	540	9	3000	>90	250	Black
02.0591.9.930.BR	540	9	3000	>90	250	Brass
NEW 02.0591.9.930.DB	540	9	3000	>90	250	Diamond black
02.0591.9.940.WH	540	9	4000	>90	250	White
02.0591.9.940.BK	540	9	4000	>90	250	Black
02.0591.9.940.BR	540	9	4000	>90	250	Brass
NEW 02.0591.9.940.DB	540	9	4000	>90	250	Diamond black



MATERIAL | AL

» 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 313



02.0591.9.930.WH



02.0591.9.930.BK



02.0591.9.930.BR




02.0591.9.930.DB



Ceiling surface

TUB M SA NB



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.0595.9.930.WH	750	9	3000	>90	220	White
02.0595.9.930.BK	750	9	3000	>90	220	Black



MATERIAL | AL

» 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT

» 313



02.0595.9.930.WH + 06.A05SH.BR



02.0595.9.930.WH + 06.A05SH.CP



02.0595.9.930.BK + 06.A05SH.BR




02.0595.9.930.BK + 06.A05SH.CP

Ceiling surface



TUB M SA 140



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.0514.13.930.WH	758	13	3000	>90	350	White
02.0514.13.930.BK	758	13	3000	>90	350	Black
02.0514.13.940.WH	903	13	4000	>90	350	White
02.0514.13.940.BK	903	13	4000	>90	350	Black



MATERIAL | AL

» 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 313



02.0514.13.930.WH + 06.A05SH.BR



02.0514.13.930.WH + 06.A05SH.CP




02.0514.13.930.BK + 06.A05SH.BR



02.0514.13.930.BK + 06.A05SH.CP

TUB L S 150




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.0711.18.930.WH	1287	18	3000	>90	500	White
02.0711.18.930.BK	1287	18	3000	>90	500	Black
02.0711.18.940.WH	1287	18	4000	>90	500	White
02.0711.18.940.BK	1287	18	4000	>90	500	Black



MATERIAL | AL

» 318

TUB L SA 150



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.0715.13.940.WH	1023	13	4000	>90	350	White
02.0715.13.940.BK	1023	13	4000	>90	350	Black



MATERIAL | AL

» 318

ACCESSORIES

	Honeycomb	06.A07HC
--	-----------	----------

» 313




02.0711.18.930.WH



02.0711.18.930.BK

Ceiling surface

ROLL



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.0800.10.930.WH	924	9	3000	>90	250	White
02.0800.10.930.BK	924	9	3000	>90	250	Black
02.0800.10.940.WH	989	9	4000	>90	250	White
02.0800.10.940.BK	989	9	4000	>90	250	Black

LED CE ENEC IP44 INCL 60°

MATERIAL | AL

» 318



02.0800.10.930.WH




02.0800.10.930.BK

Ceiling surface



BLOCK




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.8010.10.930.WH	820	10	3000	>90	250	White
02.8010.10.930.BK	820	10	3000	>90	250	Black



MATERIAL | AL » 318

BLOCK 2



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.8020.20.930.WH	2 x 820	2 x 10	3000	>90	250	White
02.8020.20.930.BK	2 x 820	2 x 10	3000	>90	250	Black



MATERIAL | AL » 318



02.8020.20.930.BK




02.8020.20.930.BK/WH



02.8020.20.930.WH/BK

BOX




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.8030.10.830.WH	903	10	3000	>80	500	White
02.8030.10.830.BK	903	10	3000	>80	500	Black



MATERIAL | AL » 318

BOX 2



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.8040.20.830.WH	2 x 903	2 x 10	3000	>80	500	White
02.8040.20.830.BK	2 x 903	2 x 10	3000	>80	500	Black



MATERIAL | AL » 318



02.8040.20.830.BK




02.8040.20.830.BK/WH



02.8040.20.830.WH/BK

SOL SURF MINI



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.7526.7.930.WH	624	7	3000	>90	350	White
02.7526.7.930.BK	624	7	3000	>90	350	Black
02.7526.7.940.WH	624	7	4000	>90	350	White
02.7526.7.940.BK	624	7	4000	>90	350	Black



MATERIAL | AL


» 318

ACCESSORIES

Replaceable ring. White color	SOL M RING WHITE
Replaceable ring. Black color	SOL M RING BLACK
Replaceable ring. Copper color	SOL M RING COPPER
Replaceable ring. Brass color	SOL M RING BRASS
Replaceable ring. Chrome color	SOL M RING CHROME
NEW Replaceable ring. Diamond black color	SOL M RING DIAMOND BLACK

» 313

SOL SURF



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.9533.14.930.WH	1446	14	3000	>90	350	White
02.9533.14.930.BK	1446	14	3000	>90	350	Black
02.9533.14.940.WH	1446	14	4000	>90	350	White
02.9533.14.940.BK	1446	14	4000	>90	350	Black




MATERIAL | AL

» 318

ACCESSORIES


Replaceable ring. White color	SOL RING WHITE
Replaceable ring. Black color	SOL RING BLACK
Replaceable ring. Copper color	SOL RING COPPER
Replaceable ring. Brass color	SOL RING BRASS
Replaceable ring. Chrome color	SOL RING CHROME
NEW Replaceable ring. Diamond black color	SOL RING DIAMOND BLACK
Lens 12°	06.A09LS12

» 313

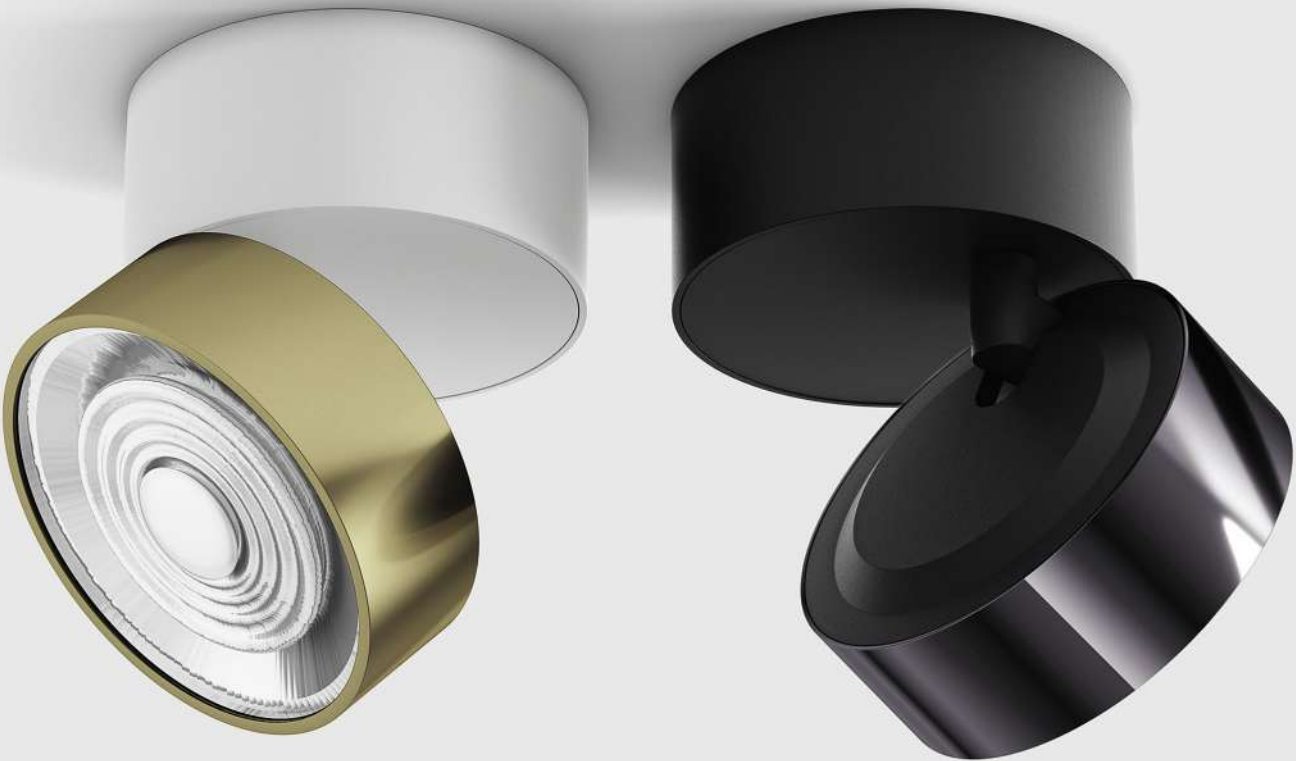

Ceiling surface

TURBINE



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.0190.15.930.WH	1800	15	3000	>90	500	White
02.0190.15.930.BK	1800	15	3000	>90	500	Black
02.0190.15.940.WH	1800	15	4000	>90	500	White
02.0190.15.940.BK	1800	15	4000	>90	500	Black



MATERIAL | AL

» 318

Ceiling surface




02.0190.15.930.WH



02.0190.15.930.BK

DISK S




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.2600.25.930.WH	2625	25	3000	>90	700	White
02.2600.25.930.BK	2625	25	3000	>90	700	Black
02.2600.25.940.WH	2625	25	4000	>90	700	White
02.2600.25.940.BK	2625	25	4000	>90	700	Black



MATERIAL | AL PC [i](#) » 318

DISK M



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
02.3500.32.930.WH	3360	32	3000	>90	700	White
02.3500.32.930.BK	3360	32	3000	>90	700	Black
02.3500.32.940.WH	3360	32	4000	>90	700	White
02.3500.32.940.BK	3360	32	4000	>90	700	Black



MATERIAL | AL PC [i](#) » 318




02.2600.25.930.BK



02.3500.32.930.BK



BRIGHT S




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2239.15.930/940.WH	945	15	3000/4000	>90	220	White
	630	10				
	560	8				



MATERIAL | AL PC » 318

BRIGHT M




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.3039.24.930/940.WH	1610	24	3000/4000	>90	220	White
	1260	18				
	700	10				



MATERIAL | AL PC » 318

FLAT S1




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2121.15.930/940.WH	1210 770	15 10	3000/4000	>90	220	White



MATERIAL | PC PC » 318

FLAT S2




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2626.24.930/940.WH	1960	24	3000/4000	>90	220	White
	1470	18				
	805	10				




MATERIAL | PC PC » 318

FLAT S3




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.4040.32.930/940.WH	2660	38	3000/4000	>90	220	White
	2030	29				



MATERIAL | PC PC » 318

FLAT R1




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2255.15.930/940.WH	1190	15	3000/4000	>90	220	White
	770	10				



MATERIAL | PC PC ⓘ » 318

FLAT R2




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2749.24.930/940.WH	1960	24	3000/4000	>90	220	White
	1470	18				
	805	10				



MATERIAL | PC PC ⓘ » 318

FLAT R3




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.4065.32.930/940.WH	2880	32	3000/4000	>90	220	White
	1960	24				



MATERIAL | PC PC ⓘ » 318

FLAT R1 SMART




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2255.15.930/940.WH.S	1120 770	15 10	3000/4000	>90	220	White



MATERIAL | PC PC ⓘ » 318

ⓘ WITH MOTION DETECTOR

FLAT R2 SMART



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2749.24.930/940.WH.S	1960	24	3000/4000	>90	220	White
	1470	18				
	805	10				



MATERIAL | PC PC ⓘ » 318

ⓘ WITH MOTION DETECTOR

Ceiling suspended

Ceiling suspended


SUSPENDED TUB SERIES

The TUB suspended series is a collection of pendant lights, which allows the creation of different combination diameter and length in order to create a unique composition of pendant lights. The TUB has a cylindrical shape and is available in a variety of sizes and finishes to suit different design preferences.

TUB XS P



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0160.2.930.WH	137	2,4	3000	>90	700	White
03.0160.2.930.BK	137	2,4	3000	>90	700	Black
03.0160.2.930.BR	137	2,4	3000	>90	700	Brass




MATERIAL | AL

» 318

TUB XS P NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0161.2.930.WH	137	2,4	3000	>90	700	White
03.0161.2.930.BK	137	2,4	3000	>90	700	Black
03.0161.2.930.BR	137	2,4	3000	>90	700	Brass




MATERIAL | AL

» 318

TUB XS P NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0162.2.930.WH	137	2,4	3000	>90	700	White
03.0162.2.930.BK	137	2,4	3000	>90	700	Black
03.0162.2.930.BR	137	2,4	3000	>90	700	Brass




MATERIAL | AL

» 318



Surface base



White



Black




Brass




Trimless base



Frame base



White



Black




Brass

MATCH S P 450



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0340.7.930.BR	415	7	3000	>90	700	Brass
03.0340.7.940.BR	415	7	4000	>90	700	Brass




MATERIAL | BR PC

» 318

MATCH S P 450 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0341.7.930.BR	415	7	3000	>90	700	Brass
03.0341.7.940.BR	415	7	4000	>90	700	Brass




MATERIAL | BR PC

» 318

MATCH S P 450 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0342.7.930.BR	415	7	3000	>90	700	Brass
03.0342.7.940.BR	415	7	4000	>90	700	Brass




MATERIAL | BR PC

» 318

MATCH S P 550



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0350.7.930.BR	415	7	3000	>90	700	Brass
03.0350.7.940.BR	415	7	4000	>90	700	Brass




MATERIAL | BR PC

» 318

MATCH S P 550 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0351.7.930.BR	415	7	3000	>90	700	Brass
03.0351.7.940.BR	415	7	4000	>90	700	Brass




MATERIAL | BR PC

» 318

MATCH S P 550 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0352.7.930.BR	415	7	3000	>90	700	Brass
03.0352.7.940.BR	415	7	4000	>90	700	Brass




MATERIAL | BR PC

» 318

TUB S P 200



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0320.8.930.WH	558	8	3000	>90	700	White
03.0320.8.930.BK	558	8	3000	>90	700	Black
03.0320.8.930.BR	558	8	3000	>90	700	Brass
NEW 03.0320.8.930.DB	558	8	3000	>90	700	Diamond black



LED

CE

ERC

F

IP20

INCL

50°

MATERIAL | AL


i

» 318

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32


i

» 313

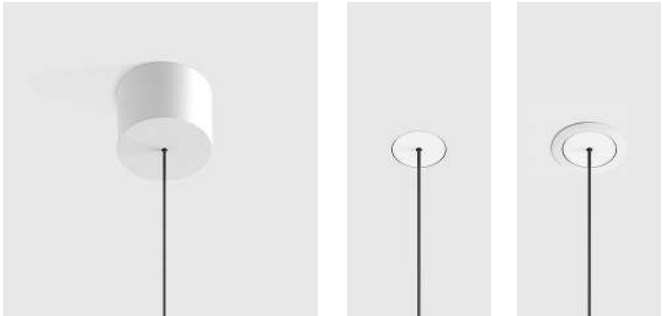


Surface base Trimless base Frame base

TUB S P 200 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0321.8.930.WH	558	8	3000	>90	700	White
03.0321.8.930.BK	558	8	3000	>90	700	Black
03.0321.8.930.BR	558	8	3000	>90	700	Brass
NEW 03.0321.8.930.DB	558	8	3000	>90	700	Diamond black



LED

CE

ERC

F

IP20

INCL

Ø39

75

50°

MATERIAL | AL

i

» 318

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

i

» 313

TUB S P 200 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0322.8.930.WH	558	8	3000	>90	700	White
03.0322.8.930.BK	558	8	3000	>90	700	Black
03.0322.8.930.BR	558	8	3000	>90	700	Brass
NEW 03.0322.8.930.DB	558	8	3000	>90	700	Diamond black



LED

CE

ERC

F

IP20

INCL

Ø42

75

50°

MATERIAL | AL


i

» 318

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32


i

» 313

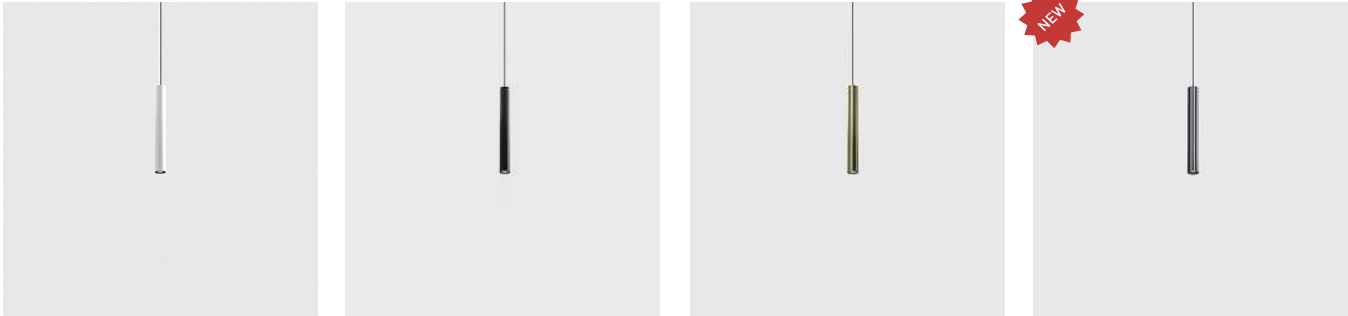

White Black Brass Diamond black

TUB S P 300



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0330.8.930.WH	389	8	3000	>90	700	White
03.0330.8.930.BK	389	8	3000	>90	700	Black
NEW 03.0330.8.930.BR	389	8	3000	>90	700	Brass
03.0330.8.940.WH	474	8	4000	>90	700	White
03.0330.8.940.BK	474	8	4000	>90	700	Black
NEW 03.0330.8.940.BR	474	8	4000	>90	700	Brass




MATERIAL | AL


i » 318

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

i » 313

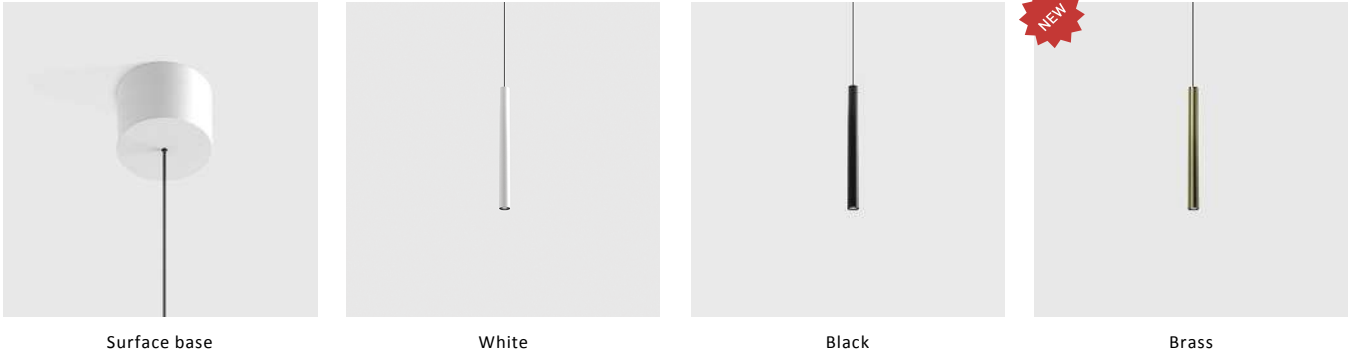

TUB S P 300 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0331.8.930.WH	389	8	3000	>90	700	White
03.0331.8.930.BK	389	8	3000	>90	700	Black
NEW 03.0331.8.930.BR	389	8	3000	>90	700	Brass
03.0331.8.940.WH	474	8	4000	>90	700	White
03.0331.8.940.BK	474	8	4000	>90	700	Black
NEW 03.0331.8.940.BR	474	8	4000	>90	700	Brass




MATERIAL | AL

i » 318

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

i » 313

TUB S P 300 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0332.8.930.WH	389	8	3000	>90	700	White
03.0332.8.930.BK	389	8	3000	>90	700	Black
NEW 03.0332.8.930.BR	389	8	3000	>90	700	Brass
03.0332.8.940.WH	474	8	4000	>90	700	White
03.0332.8.940.BK	474	8	4000	>90	700	Black
NEW 03.0332.8.940.BR	474	8	4000	>90	700	Brass




MATERIAL | AL


i » 318

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

i » 313

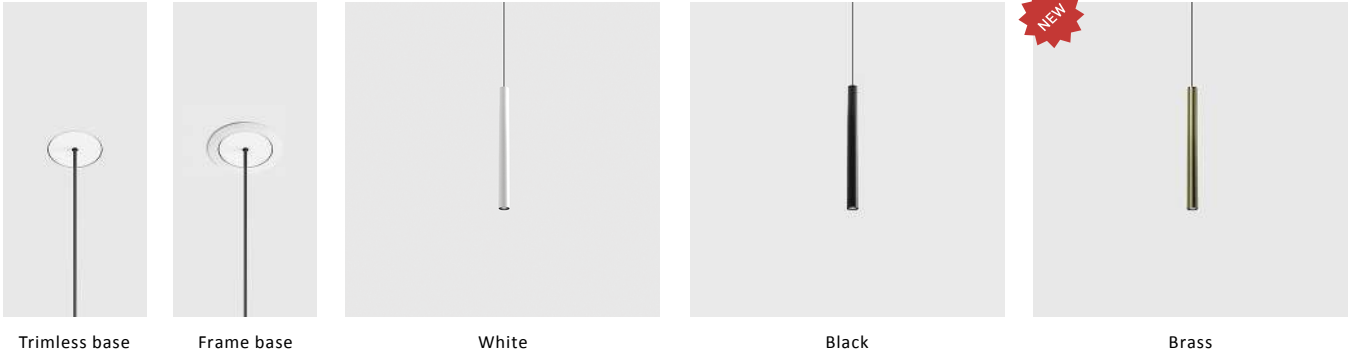

TUB S P 600



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0360.8.930.WH	657	8	3000	>90	700	White
03.0360.8.930.BK	657	8	3000	>90	700	Black
03.0360.8.930.BR	657	8	3000	>90	700	Brass

LED

CE

ERC

F

IP20

INCL

50°

MATERIAL | **AL**


i

» 318


ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

i

» 313

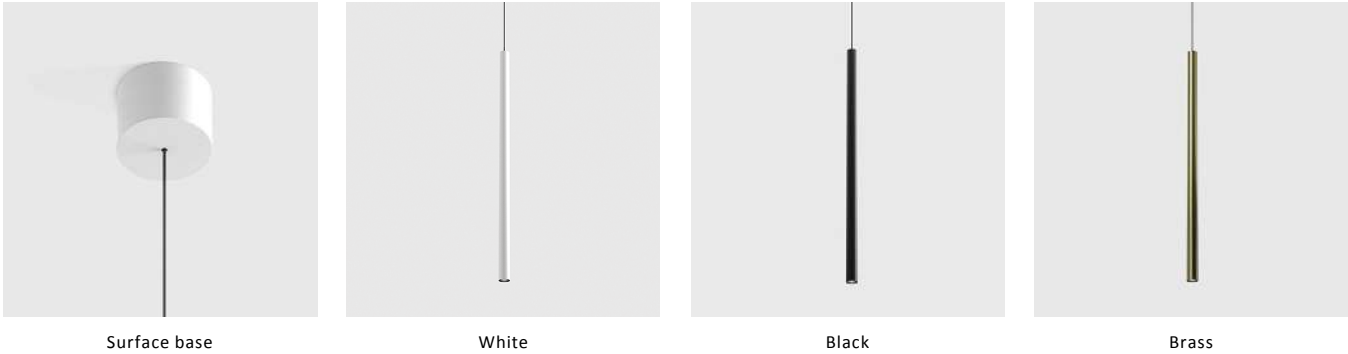

TUB S P 600 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0361.8.930.WH	657	8	3000	>90	700	White
03.0361.8.930.BK	657	8	3000	>90	700	Black
03.0361.8.930.BR	657	8	3000	>90	700	Brass

LED

CE

ERC

F

IP20

INCL

Ø39

75

50°

MATERIAL | **AL**

i


» 318

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

i

» 313

TUB S P 600 NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0362.8.930.WH	657	8	3000	>90	700	White
03.0362.8.930.BK	657	8	3000	>90	700	Black
03.0362.8.930.BR	657	8	3000	>90	700	Brass

LED

CE

ERC

F

IP20

INCL

Ø42

75

50°

MATERIAL | **AL**


i

» 318

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

i



» 313

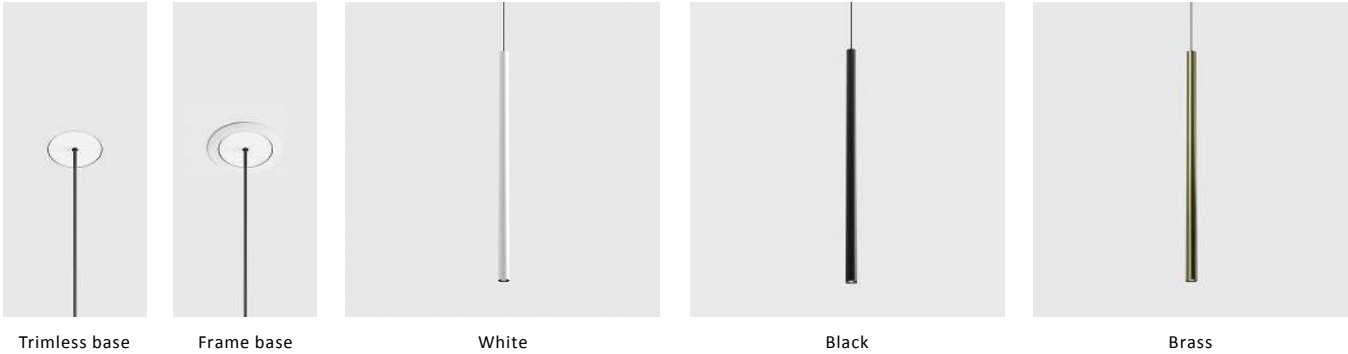

TUB S P 300 ZOOM



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0309.6.930.WH	228 - 307	5,4	3000	>90	700	White
03.0309.6.930.BK	228 - 307	5,4	3000	>90	700	Black
03.0309.6.940.WH	240 - 322	5,4	4000	>90	700	White
03.0309.6.940.BK	240 - 322	5,4	4000	>90	700	Black




MATERIAL |  AL

 » 318

TUB S P 300 ZOOM NANO




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0319.6.930.WH	228 - 307	5,4	3000	>90	700	White
03.0319.6.930.BK	228 - 307	5,4	3000	>90	700	Black
03.0319.6.940.WH	240 - 322	5,4	4000	>90	700	White
03.0319.6.940.BK	240 - 322	5,4	4000	>90	700	Black




MATERIAL |  AL

 » 318

TUB S P 300 ZOOM NANO




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0329.6.930.WH	228 - 307	5,4	3000	>90	700	White
03.0329.6.930.BK	228 - 307	5,4	3000	>90	700	Black
03.0329.6.940.WH	240 - 322	5,4	4000	>90	700	White
03.0329.6.940.BK	240 - 322	5,4	4000	>90	700	Black



MATERIAL |  AL


 » 318

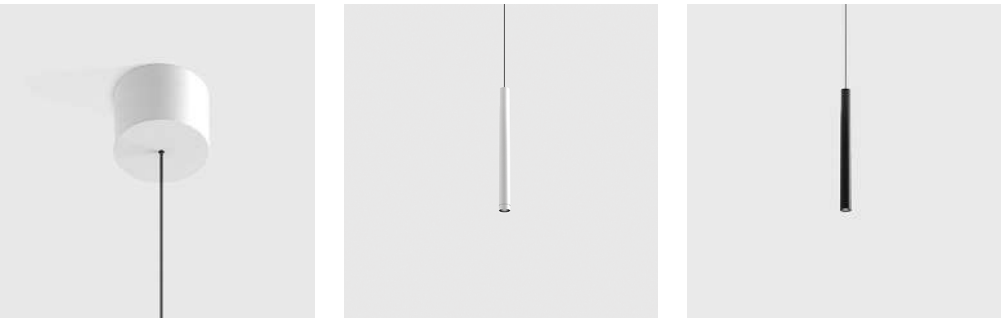

Surface base

White

Black

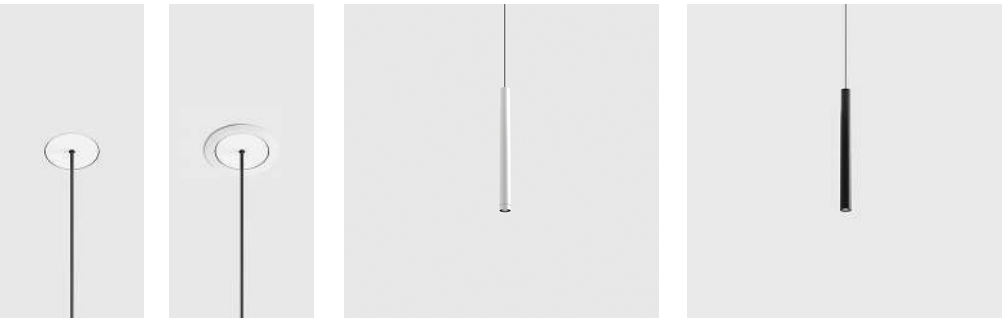


Trimless base

Frame base

White

Black

TUB M P 200



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0521.19.930.WH	1210	10,8	3000	>90	500	White
03.0521.19.930.BK	1210	10,8	3000	>90	500	Black
03.0521.19.940.WH	1320	10,8	4000	>90	500	White
03.0521.19.940.BK	1320	10,8	4000	>90	500	Black



MATERIAL | AL

i » 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

i » 313




03.0521.19.930.WH



03.0521.19.930.BK



TUB M P 200 DTW



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0521.12.DTW.WH	1150	12	DIM to warm 1800-3000	>95	350	White
03.0521.12.DTW.BK	1150	12	DIM to warm 1800-3000	>95	350	Black

ⓘ NESSARY USE PHASE CUT DIMMER



MATERIAL | AL

ⓘ » 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

ⓘ » 313



03.0521.12.DTW.WH + 06.A05SHL.CP



03.0521.12.DTW.WH + 06.A05SHL.BR



03.0521.12.DTW.BK + 06.A05SHL.CP



03.0521.12.DTW.BK + 06.A05SHL.BR

Dim to warm it is a new technology for regulation of light intensity and color temperature synchronously. Nessary use phase cut dimmer.

3000K
100%



2700K
50%





1800K
5%



Ceiling suspended

TUB M P 200 ZOOM



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.0529.13.930.WH	615 - 1040	13	3000	>90	700	White
03.0529.13.930.BK	615 - 1040	13	3000	>90	700	Black
03.0529.13.940.WH	615 - 1040	13	4000	>90	700	White
03.0529.13.940.BK	615 - 1040	13	4000	>90	700	Black



MATERIAL | AL

i » 318

Ceiling suspended



Surface base



03.0529.13.930.WH




03.0529.13.930.BK

BALL M P



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.1000.7.930.WH	590	7	3000	>90	700	White
03.1000.7.930.BK	590	7	3000	>90	700	Black




MATERIAL | AL GL

» 318

BALL M P NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.1001.7.930.WH	590	7	3000	>90	700	White
03.1001.7.930.BK	590	7	3000	>90	700	Black




MATERIAL | AL GL

» 318

BALL M P NANO



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
03.1002.7.930.WH	590	7	3000	>90	700	White
03.1002.7.930.BK	590	7	3000	>90	700	Black



MATERIAL | AL GL

» 318



Surface base

White

Black



Trimless base

Frame base


White

Black

BALL L




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.1800.28.930.WH	2028	28	3000	>90	220	White
02.1800.28.930.BK	2028	28	3000	>90	220	Black



LEDCEERCEIP20INCLopalTilt

MATERIAL | ALGL


i » 318



BALL L DTW




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.1800.28.DTW.BK	2028	28	DIM to warm 1800-3000	>90	220	Black



LEDCEERCEIP20INCLopalTilt

MATERIAL | ALGL

i » 318




02.1800.28.930.WH



02.1800.28.930.BK



SLIMLINE



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1870.5.930.BR	400	5	3000	>90	48	Brass


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 318

SLIMLINE



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
10.1811.8.930.BR	640	8	3000	>90	48	Brass

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 318



Rotation luminary body




Ceiling suspended

POINTER SUSP BASE



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
10.1301.6.930.BK/CG	4x137	4x5,4	3000	>90	700	Black/ Champagne gold



LED	CE	ERC	↓	III	F	IP20	INCL	20°
MATERIAL AL								
» 318								


POINTER SUSP



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
10.1300.6.930.BK/CG	4x137	4x5,4	3000	>90	700	Black/ Champagne gold

DRIVER MUST BE PLACED ON REMOTE


ACCESSORIES		
Ø68 Ø35	Trimless white	01.A39TRLS.P.WH
Ø68 Ø35	Trimless black	01.A39TRLS.P.BK
Ø48 Ø42	Frame white	01.A39FRM.P.WH
Ø48 Ø42	Frame black	01.A39FRM.P.BK




LED	CE	ERC	↓	III	F	IP20	EXCL	20°
MATERIAL AL								
» 318								



10.1301.6.930.BK/CG



01.A39TRLS.P.WH




01.A39FRM.S.P.WH

Ceiling suspended



OFFICE



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
03.1610.12.930.BK	415	12	3000	>90	48	Black
03.1610.12.940.BK	415	12	4000	>90	48	Black


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 318

OFFICE



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
03.1620.24.930.BK	972	24	3000	>90	48	Black
03.1620.24.940.BK	972	24	4000	>90	48	Black


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 318

PROFILE




Code	Product Lumen	Power Watt	Color T (K)	L mm	CRI	Color
05.3527.20.830/840.WH/BK	1660	20	3000 / 4000	850	>80	White / Black
05.3527.26.830/840.WH/BK	2160	26	3000 / 4000	1130	>80	White / Black
05.3527.33.830/840.WH/BK	2700	33	3000 / 4000	1410	>80	White / Black
05.3527.39.830/840.WH/BK	3240	39	3000 / 4000	1690	>80	White / Black
05.3527.52.830/840.WH/BK	4320	52	3000 / 4000	2250	>80	White / Black



MATERIAL | AL PC

i » 318



Microprisma trasparente




05.3527.20.830.WH




05.3527.20.830.BK



POINTER FLOOR




Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
10.1800.6.930.BK/CG	137	6	3000	>90	180	Black/ Champagne gold






MATERIAL | AL

i » 318

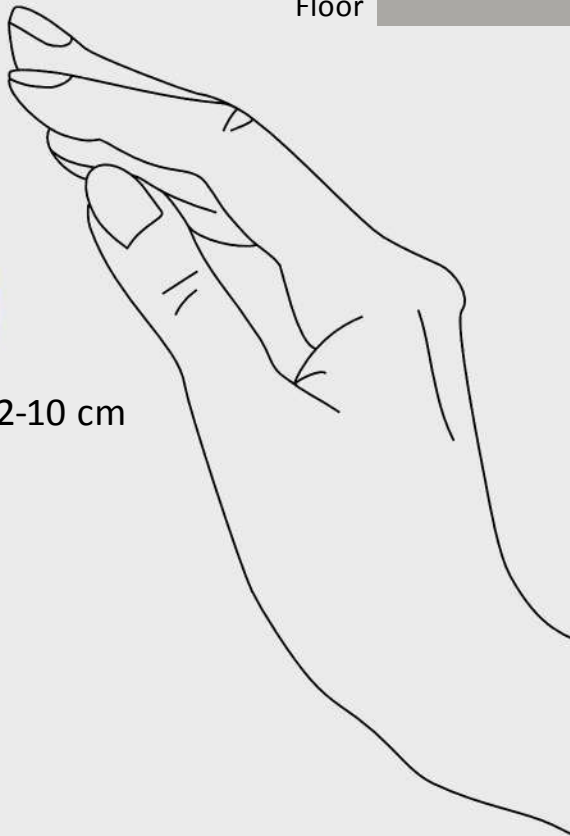


2-10 cm

MINI_LINE 42 TRACK

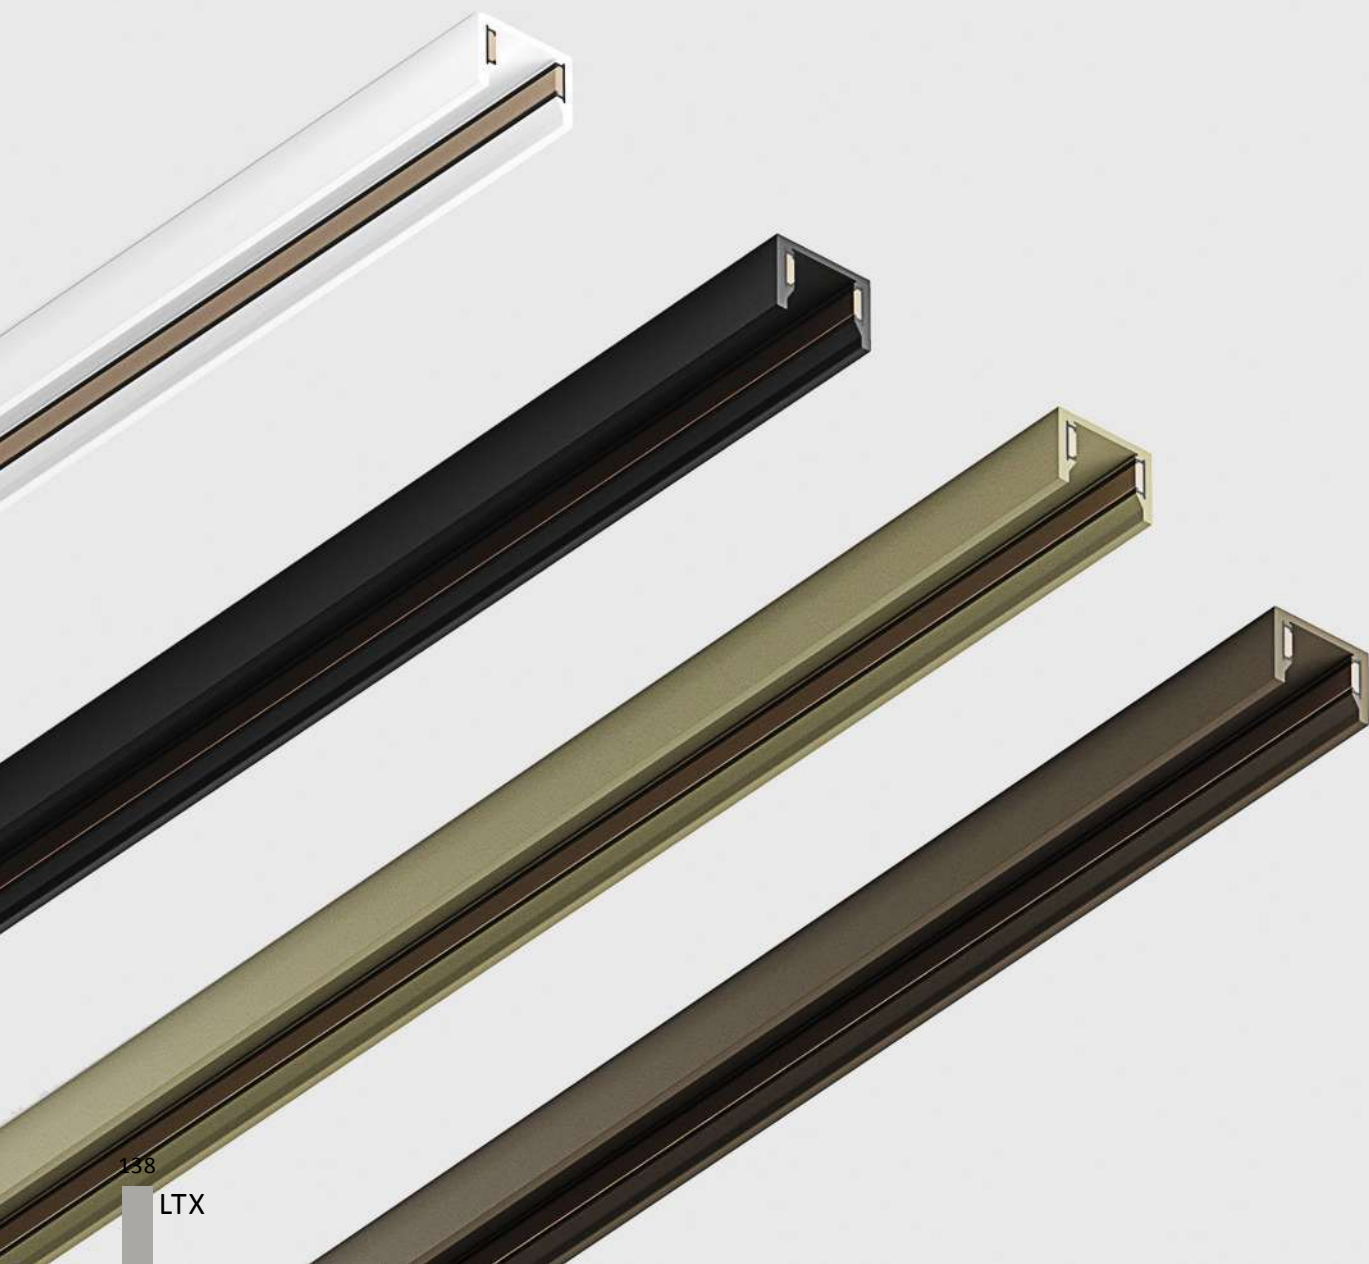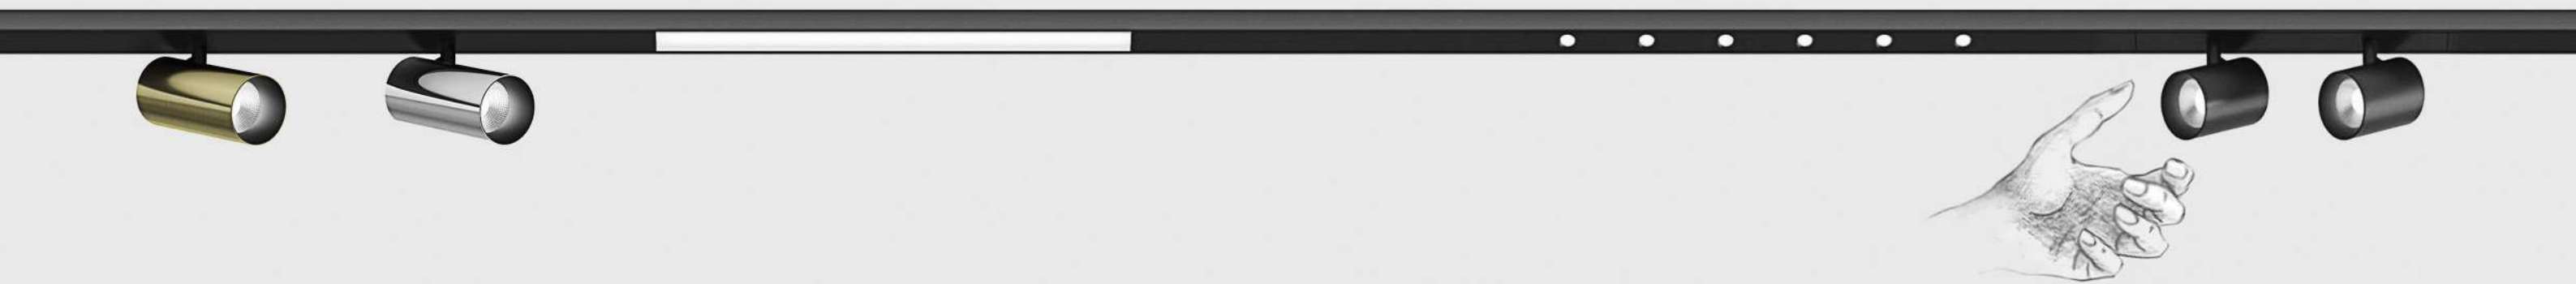

MINI_LINE 42 TRACK S




CE ENEC IP20 42V EXCL

MATERIAL | AL

	Code	Dimensions (mm): LxWxH	Color
Surface track (End caps 2pcs included)	07.S300.WH	3000 x 19 x 13,5	White
	07.S300.BK	3000 x 19 x 13,5	Black

» 318

MINI_LINE 42 TRACK S




CE ENEC IP20 42V EXCL

MATERIAL | AL

	Code	Dimensions (mm): LxWxH	Color
Surface track (End caps 2pcs included)	07.S200.LG	2000 x 19 x 13,5	Like gold
	07.S200.LB	2000 x 19 x 13,5	Like brass

» 318

MINI_LINE 42 CORNER S HR




CE ENEC IP20 42V

MATERIAL | AL

	Code	Color
Surface «L» track connector	07.S90HR.WH	White
	07.S90HR.BK	Black
	07.S90HR.LG	Like gold
	07.S90HR.LB	Like brass

» 318

MINI_LINE 42 CORNER S IN




CE ENEC IP20 42V

MATERIAL | AL

	Code	Color
Surface «L» connector Ceiling to Wall in-installation	07.S90IN.WH	White
	07.S90IN.BK	Black

» 318

MINI_LINE 42 CORNER S OUT




CE ENEC IP20 42V

MATERIAL | AL

	Code	Color
Surface «L» track connector Wall to Wall out-installation	07.S90OUT.WH	White
	07.S90OUT.BK	Black

» 318

MINI_LINE 42 MEC JOINT




CE ENEC IP20

MATERIAL | AL

	Code	Color
Mechanical linear connector for track	07.R/SLNCON.WH	White
	07.R/SLNCON.BK	Black

» 318

MINI_LINE 42 END CAP S




CE ENEC IP20

MATERIAL | PC

	Code	Color
End cap for surface track 2 pcs/set	07.R/SECAP.WH	White
	07.R/SECAP.BK	Black
	07.SECAP.LG	Like gold
	07.SECAP.LB	Like brass

» 318

MINI_LINE 42 COVER R/S



CE ENEC IP20


MATERIAL | PC

	Code	Dimensions (mm): LxWxH	Color
Track cover for surface	07.R/SCOV100.WH	1000 x 15,4 x 8	White
	07.R/SCOV100.BK	1000 x 15,4 x 8	Black

» 318


MINI_LINE 42 ELECTRICAL JOINT FLEX




	Code	Color
 Electrical joint flex connector for tack	07.S2LE.WH	White
	07.S2LE.BK	Black
CE ENEC  IP20 42V MATERIAL  AL  » 318		

MINI_LINE 42 LIVE END 500




	Code	Color
 Feed cable, L 300mm	07.SLE50.WH	White
	07.SLE50.BK	Black
CE ENEC  IP20 42V MATERIAL  AL  » 318		


INSTALLATION SURFACE
TRACK SYSTEM MINI_LINE 42

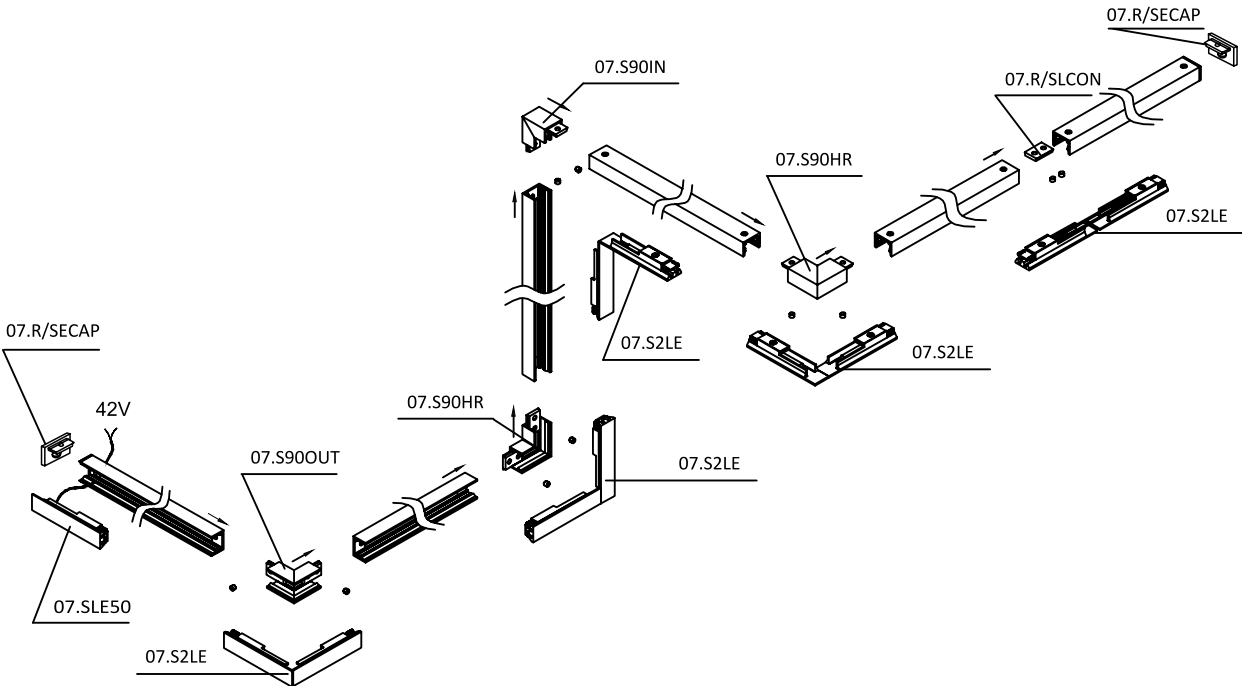


! Every 10 meters of track must be connected to a separate power supply adapter.
Maximum permissible current for one electrical circuit - 5.7A (240W)

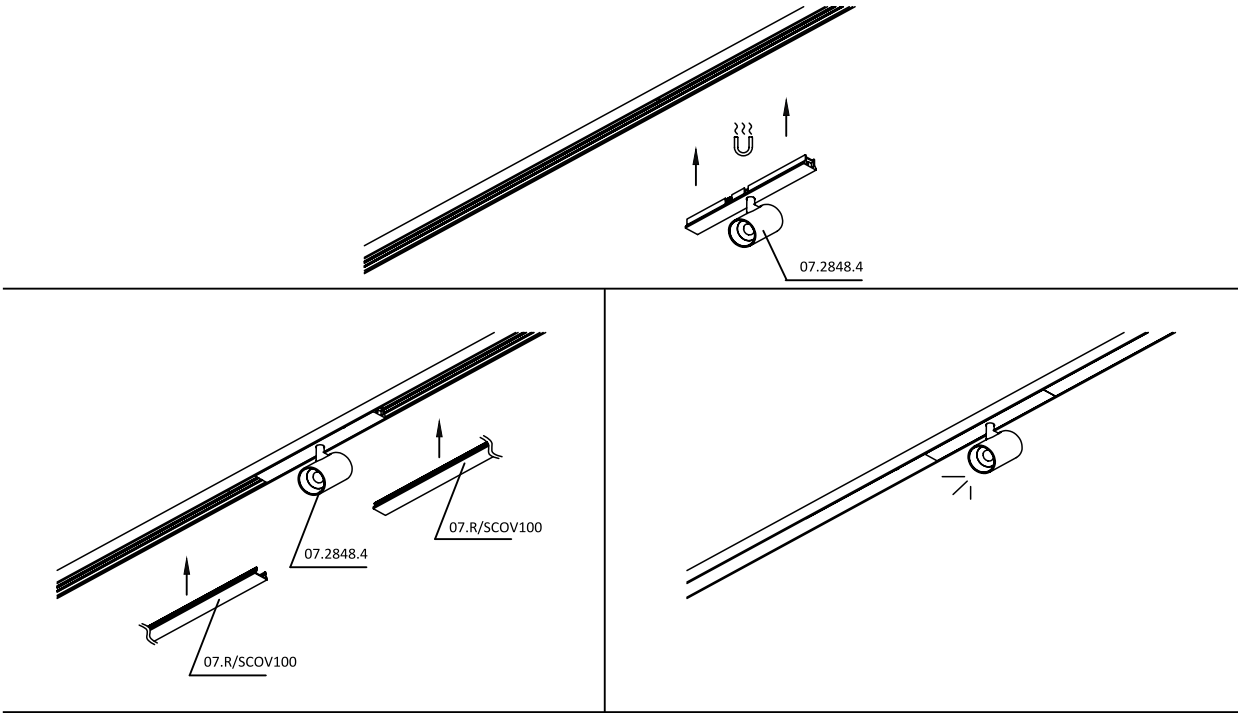

MINI_LINE 42 LINEA 300



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.3000.6.930.WH	395	6	3000	>90	White
07.3000.6.930.BK	395	6	3000	>90	Black
07.3000.6.940.WH	395	6	4000	>90	White
07.3000.6.940.BK	395	6	4000	>90	Black



LEDCEERCLIPFIP2042VEXCLopal


MATERIAL | ALPC

i» 318

MINI_LINE 42 LINEA 600




Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.6000.12.930.WH	790	12	3000	>90	White
07.6000.12.930.BK	790	12	3000	>90	Black




LEDCEERCLIPFIP2042VEXCLopal

MATERIAL | ALPC


i» 318

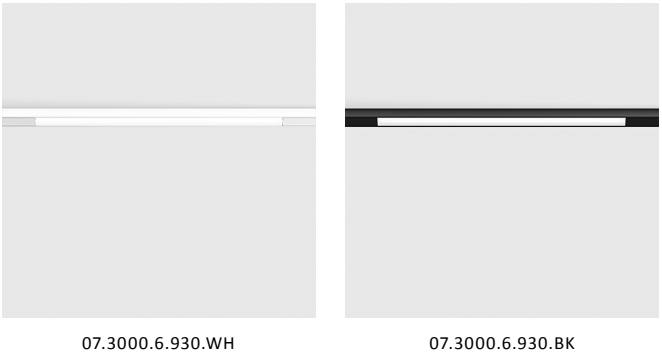

MINI_LINE 42 LINEA 900



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.9000.18.930.WH	1185	18	3000	>90	White
07.9000.18.930.BK	1185	18	3000	>90	Black




LEDCEERCLIPFIP2042VEXCLopal


MATERIAL | ALPC

i» 318

MINI_LINE 42 LINEA 1200



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.1200.24.930.WH	1580	24	3000	>90	White
07.1200.24.930.BK	1580	24	3000	>90	Black



LEDCEERCLIPFIP2042VEXCLopal


MATERIAL | ALPC

i» 318

MINI_LINE 42 COMFORT 300



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.3001.4.930.WH	390	4	3000	>90	White
07.3001.4.930.BK	390	4	3000	>90	Black
07.3001.4.940.WH	390	4	4000	>90	White
07.3001.4.940.BK	390	4	4000	>90	Black



LED

CE

ERL

IP20


42V

MATERIAL | AL PC


i

» 318

MINI_LINE 42 COMFORT 600



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.6001.8.930.WH	780	8	3000	>90	White
07.6001.8.930. BK	780	8	3000	>90	Black



LED

CE

ERL


IP20

42V

MATERIAL | AL PC

i


» 318

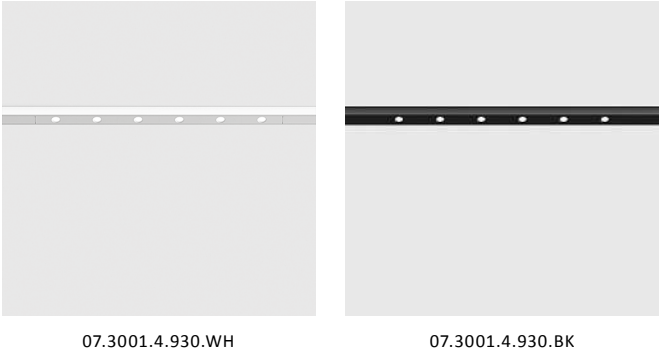

MINI_LINE 42 TUB XS A



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.2848.4.930.WH	426	3,5	3000	>90	White
07.2848.4.930.BK	426	3,5	3000	>90	Black



LED

CE

ERC

IP20

42V

EXCL

36°

Tilt

Rotate

MATERIAL |

AL

PC


i

» 318

MINI_LINE 42 TUB XS A X2



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.2848.7.930.WH	2 x 426	2 x 3,5	3000	>90	White
07.2848.7.930.BK	2 x 426	2 x 3,5	3000	>90	Black



LED

CE

ERC

IP20

42V

EXCL

2x36°

Tilt

Rotate

MATERIAL |

AL

PC

i

» 318




07.2848.7.930.WH



07.2848.7.930.BK



MINI_LINE 42 TUB S A



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.3270.5.930.WH	642	5	3000	>90	White
07.3270.5.930.BK	642	5	3000	>90	Black
07.3270.5.930.BR	642	5	3000	>90	Brass
07.3270.5.930.CR	642	5	3000	>90	Chrome
07.3270.5.940.WH	642	5	4000	>90	White
07.3270.5.940.BK	642	5	4000	>90	Black

LED

CE

EN60598

IP20


42V

MATERIAL | AL PC

i

» 318

MINI_LINE 42 TUB S A X2



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
07.3270.10.930.WH	2 x 642	2 x 5	3000	>90	White
07.3270.10.930.BK	2 x 642	2 x 5	3000	>90	Black
07.3270.10.940.WH	2 x 642	2 x 5	4000	>90	White
07.3270.10.940.BK	2 x 642	2 x 5	4000	>90	Black

LED

CE

EN60598

IP20

42V

MATERIAL | AL PC

i

» 318



07.3270.5.930.WH



07.3270.5.930.BK



07.3270.5.930.BR




07.3270.5.930.CR



IN_LINE



IN_LINE TRACK T





	Code	Dimensions (mm): LxWxH	Color
Recessed track	06.T200.BK	2000 x 40 x 54	Black
with trim	06.T300.BK	3000 x 40 x 54	Black

CE ENEC IP20 48V EXCL

MATERIAL | AL

» 318

IN_LINE CORNER T HR



	Code	Color
Recessed «L» track connector with trim (2 pcs 06.TLNCON included)	06.T90HR.BK	Black

CE ENEC IP20 48V

MATERIAL | AL

» 318

IN_LINE END CAP T



	Code	Color
End cap for recessed track T 2 pcs/set	06.TECAP.BK	Black



CE ENEC IP20

MATERIAL | AL

» 318



IN_LINE TRACK R





CE ENEC IP20 48V EXCL

MATERIAL | AL

	Code	Dimensions (mm): LxWxH	Color
Recessed track	06.R200.WH	2000 x 76 x 54	White
	06.R200.BK	2000 x 76 x 54	Black
	06.R300.WH	3000 x 76 x 54	White
	06.R300.BK	3000 x 76 x 54	Black

» 318

IN_LINE CORNER R HR




CE ENEC IP20 48V

MATERIAL | AL

	Code	Color
Recessed «L» track connector (8 pcs 06.R/SLNCON included)	06.R90HR.WH	White
	06.R90HR.BK	Black

» 318

IN_LINE CORNER R IN





CE ENEC IP20 48V

MATERIAL | AL

	Code	Color
Recessed «L» connector Ceiling to Wall, in-installation (8 pcs 06.R/SLNCON included)	06.R90IN.WH	White
	06.R90IN.BK	Black

» 318

IN_LINE CORNER R OUT



CE ENEC IP20 48V



MATERIAL | AL

	Code	Color
Recessed «L» track connector Wall to Wall out-installation (8 pcs 06.R/SLNCON included)	06.R90OUT.WH	White
	06.R90OUT.BK	Black

» 318



IN_LINE TRACK S



	Code	Dimensions (mm): LxWxH	Color
Surface / Suspension track	06.S200.WH	2000 x 30 x 54	White
	06.S200.BK	2000 x 30 x 54	Black
	06.S200.LG	2000 x 30 x 54	Like gold
	06.S200.LB	2000 x 30 x 54	Like brass
	06.S300.WH	3000 x 30 x 54	White
	06.S300.BK	3000 x 30 x 54	Black





CE ENEC IP20 48V EXCL

MATERIAL | AL

i » 318

IN_LINE CORNER S HR



	Code	Color
Surface/suspension «L» track connector (2 pcs 06.R/SLNCON included)	06.S90HR.WH	White
	06.S90HR.BK	Black
	06.S90HR.LG	Like gold
	06.S90HR.LB	Like brass





CE ENEC IP20 48V

MATERIAL | AL

i » 318



IN_LINE CORNER S IN





	Code	Color
Surface «L» track connector Ceiling to Wall in – installation (2 pcs 06.R/SLNCON included)	06.S90IN.WH	White
	06.S90IN.BK	Black

CE ENEC IP20 48V

MATERIAL | AL

» 318

IN_LINE CORNER S OUT




	Code	Color
Surface «L» track connector – Wall to Wall out – installation (2 pcs 06.R/SLNCON included)	06.S90OUT.WH	White
	06.S90OUT.BK	Black

CE ENEC IP20 48V

MATERIAL | AL

» 318

IN_LINE END CAP R/S



	Code	Color
End cap for Recessed & Surface 2 pcs/set	06.R/SECAP.WH	White
	06.R/SECAP.BK	Black
	06.R/SECAP.LG	Like gold
	06.R/SECAP.LB	Like brass



CE ENEC IP20

MATERIAL | PC

» 318



IN_LINE CORNER 90





CE ENEC IP20 48V
MATERIAL | AL

	Code	Color
Surface «90» track electrical connector	06.SE90HR.WH	White
	06.SE90HR.BK	Black

» 318

IN_LINE CORNER T RIGHT





CE ENEC IP20 48V
MATERIAL | AL

	Code	Color
Surface T right track electrical connector	06.SETRHR.WH	White
	06.SETRHR.BK	Black

» 318

IN_LINE CORNER T LEFT





CE ENEC IP20 48V
MATERIAL | AL

	Code	Color
Surface T left track electrical connector	06.SETLHR.WH	White
	06.SETLHR.BK	Black

» 318

IN_LINE CORNER X




CE ENEC IP20 48V
MATERIAL | AL



	Code	Color
Surface «X» track electrical connector	06.SEQHR.WH	White
	06.SEQHR.BK	Black

» 318

INSTALLATION SURFACE TRACK SYSTEM IN_LINE TRACK S

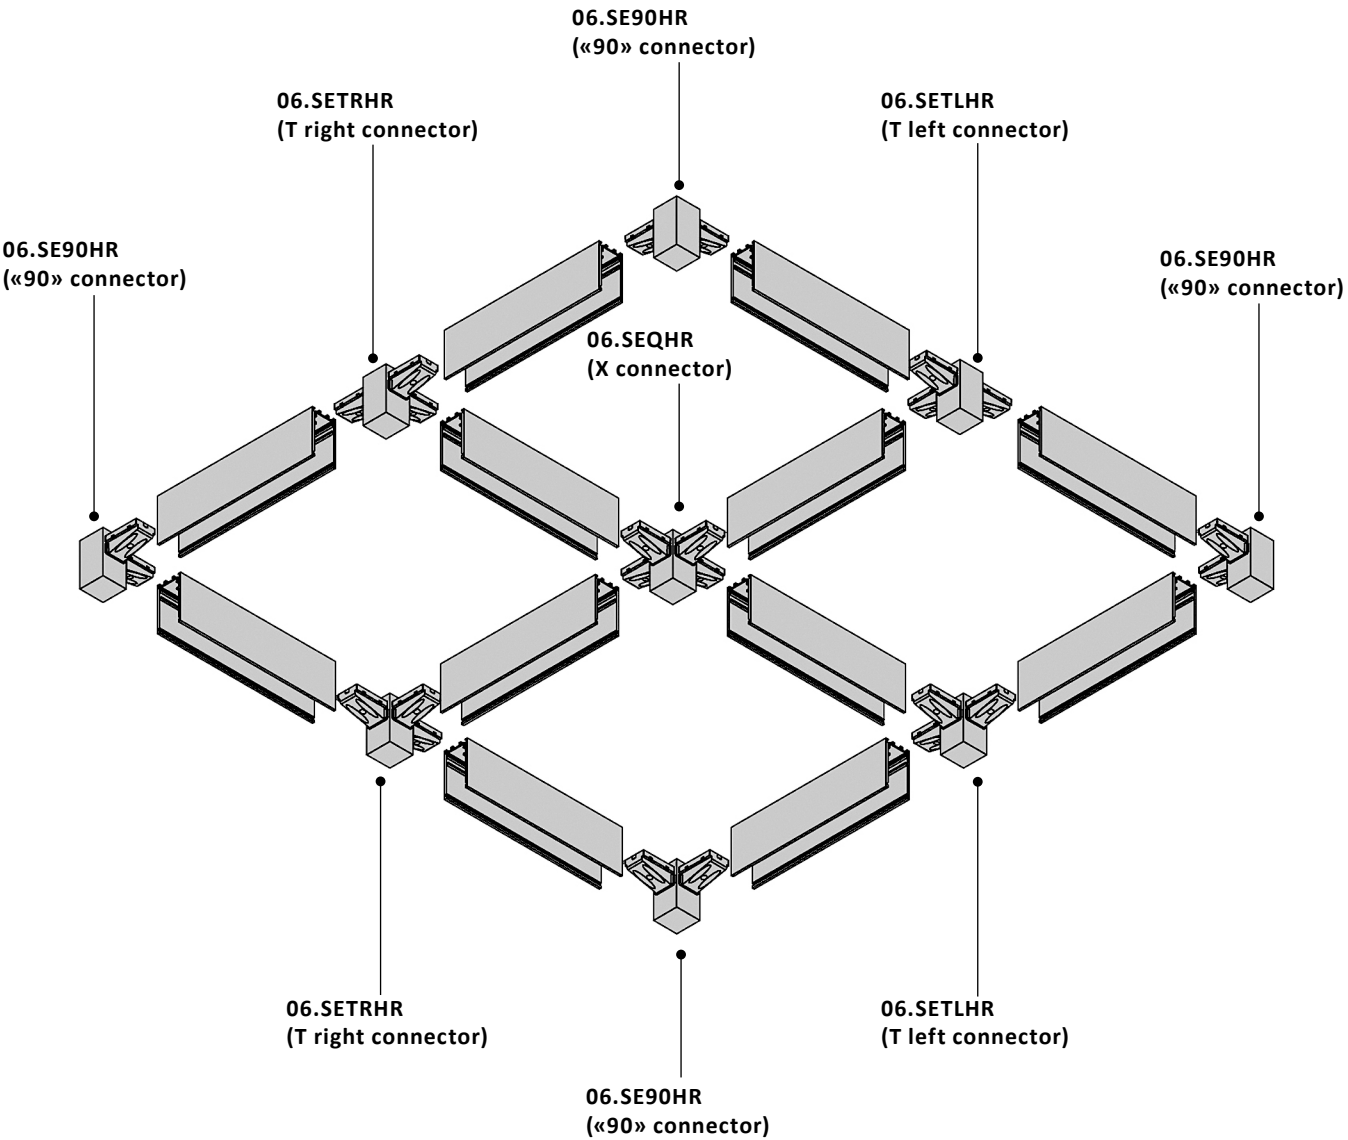

IN_LINE CORNER 180




CE ENEC IP20 48V

MATERIAL | AL

	Code	Color
Surface «180» track electrical connector	06.SE180HR.WH	White
	06.SE180HR.BK	Black

i » 318

IN_LINE CORNER 120




CE ENEC IP20 48V

MATERIAL | AL


	Code	Color
Surface «120» track electrical connector	06.SE120HR.WH	White
	06.SE120HR.BK	Black

i » 318

INSTALLATION SURFACE
TRACK SYSTEM IN_LINE TRACK S

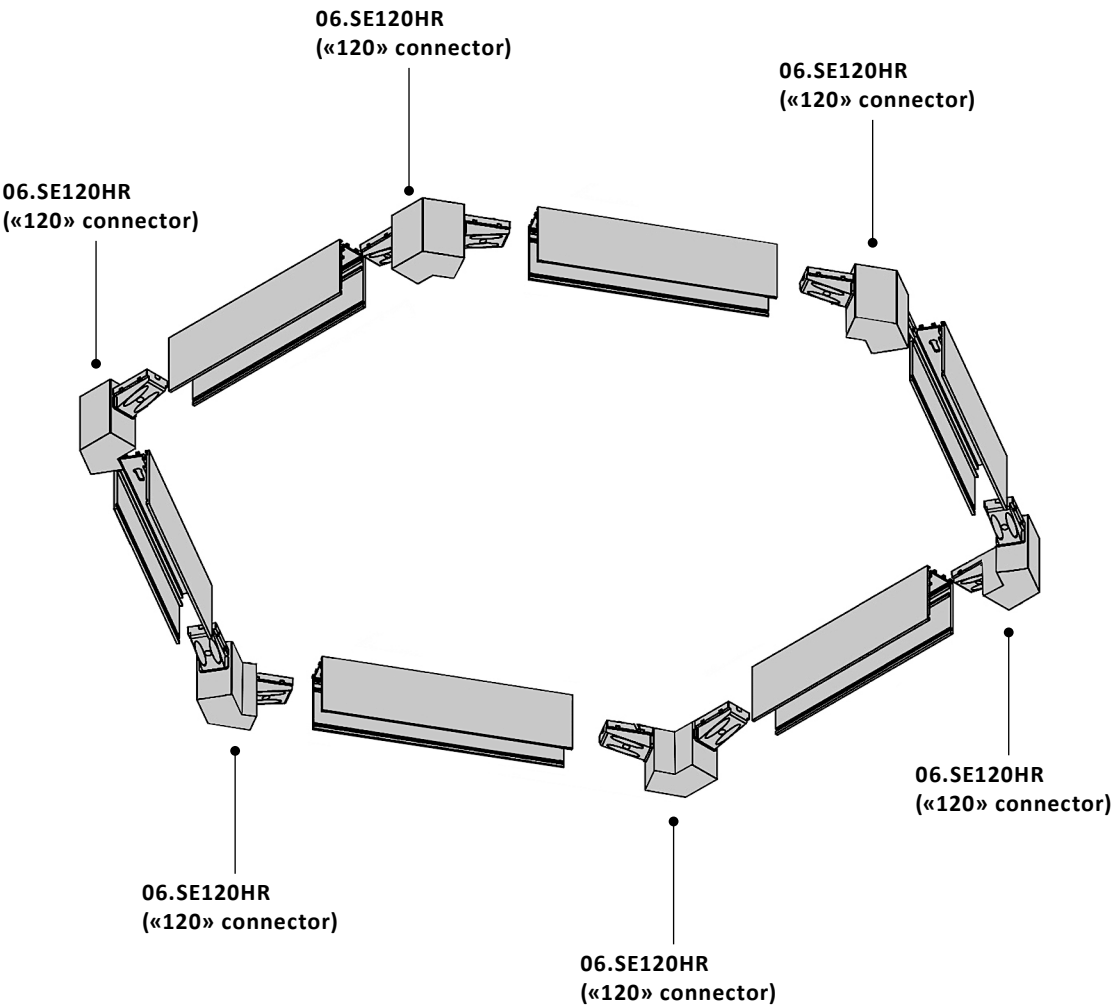

IN_LINE SHORT TRACK S





	Code	Dimensions (mm): LxWxH	Color
Surface / Suspension track (End caps 2pcs included)	06.SS300.WH	3000 x 30 x 37	White
	06.SS300.BK	3000 x 30 x 37	Black

CE ENEC IP20 48V EXCL

MATERIAL | AL

» 318

IN_LINE SHORT CORNER S HR




	Code	Color
Surface/suspension «L» track connector (2 pcs 06.R/SLNCON included)	06.SS90HR.WH	White
	06.SS90HR.BK	Black

CE ENEC IP20 48V

MATERIAL | AL

» 318

IN_LINE SHORT END CAP



	Code	Color
End cap for surface 2 pcs/set	06.SSCAP.WH	White
	06.SSCAP.BK	Black


CE ENEC IP20

MATERIAL | PC

» 318



IN_LINE LIVE END




CE ENE IP20 48V

MATERIAL | PC

» 318

	Code	Dimensions (mm): LxWxH	Color
Feed cable	06.SLE60.WH	600	White
	06.SLE60.BK	600	Black

IN_LINE LIVE END




CE ENE IP20 48V

MATERIAL | PC

» 318

	Code	Dimensions (mm): LxWxH	Color
Feed cable	06.SLE150.WH	1500	White
	06.SLE150.BK	1500	Black

IN_LINE ELECTRICAL JOINT





CE ENE IP20 48V

MATERIAL | PC

» 318

	Code	Color
Electrical joint live end for track, without cable	06.SLE00.WH	White
	06.SLE00.BK	Black

IN_LINE ELECTRICAL JOINT FLEX




CE ENE IP20 48V

MATERIAL | PC

» 318

	Code	Color
Electrical joint flex connector for tack	06.S2LE60.WH	White
	06.S2LE60.BK	Black

IN_LINE MEC JOINT




CE ENE IP20

MATERIAL | INOX

» 318

	Code	Color
Mechanical linear connector for track	06.R/SLNCON	Black

IN_LINE COVER R/S



CE ENE IP20

MATERIAL | PC

» 318

	Code	Dimensions (mm): LxWxH	Color
Track cover for Recessed & Surface	06.R/SCOV200.WH	2000 x 26 x 5	White
	06.R/SCOV200.BK		Black
	06.R/SCOV300.WH	3000 x 26 x 5	White
	06.R/SCOV300.BK		Black



IN_LINE SUSP KIT




CE ENE IP20

MATERIAL | INOX

» 318

	Code	Dimensions (mm): LxWxH	Color
Suspension	06.SS150.WH	1500 x 26 x 5	White
	06.SS150.BK		Black
	06.SS150.ZZ		Steel

IN_LINE POWER UNIT 100




CE ENEC IP20 SELV 48V NODIM

MATERIAL | AL

» 318

	Code	Power Watt	Color
Power supply	06.PSU.100.WH	100	White
	06.PSU.100.BK	100	Black

IN_LINE POWER UNIT 200




CE ENEC IP20 SELV 48V NODIM

MATERIAL | AL

» 318

	Code	Power Watt	Color
Power supply	06.PSU.200.WH	200	White
	06.PSU.200.BK	200	Black

POWER SUPPLY




CE IP20 48V NODIM

MATERIAL | PC

» 318

	Code	Dimensions (mm): LxWxH	Power Watt	Color
	06.PSU.100.W/O	298 x 30 x 16,5	100	Grey
	06.PSU.250.W/O	384 x 30 x 22	250	Grey

POWER SUPPLY DIMMING DALI




CE IP20 48V DALI

MATERIAL | STEEL

» 318

	Dimensions (mm): LxWxH	Power Watt	Color
28001233	235 x 100 x 31	75	White
28001044	235 x 100 x 31	150	White

POWER SUPPLY DIMMING DALI




CE IP20 48V DALI

MATERIAL | PC


» 318

	Dimensions (mm): LxWxH	Power Watt	Color
28000815	360 x 40 x 21	75	White / Grey
28001235	360 x 40 x 21	150	White / Grey


INSTALLATION RECESSED TRACK SYSTEM IN_LINE TRACK T

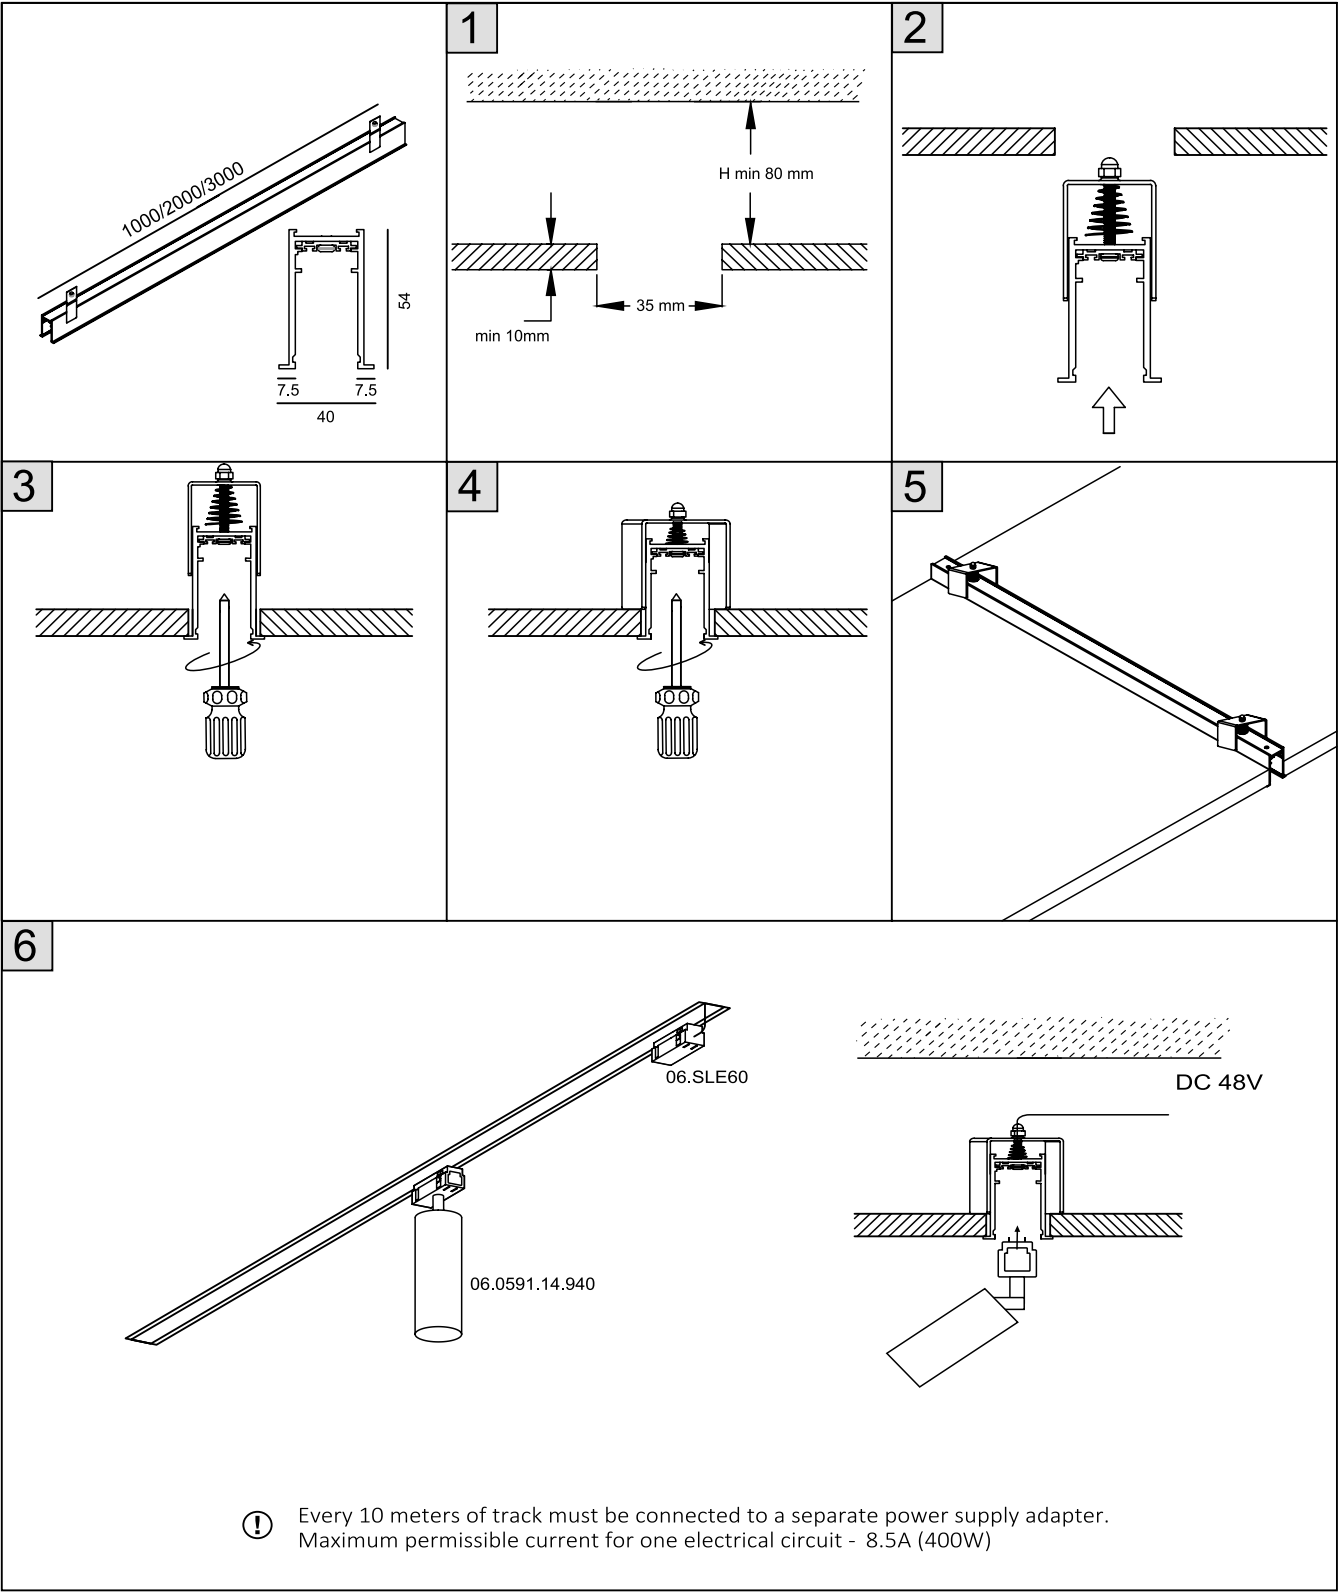

INSTALLATION RECESSED TRACK SYSTEM IN_LINE TRACK R

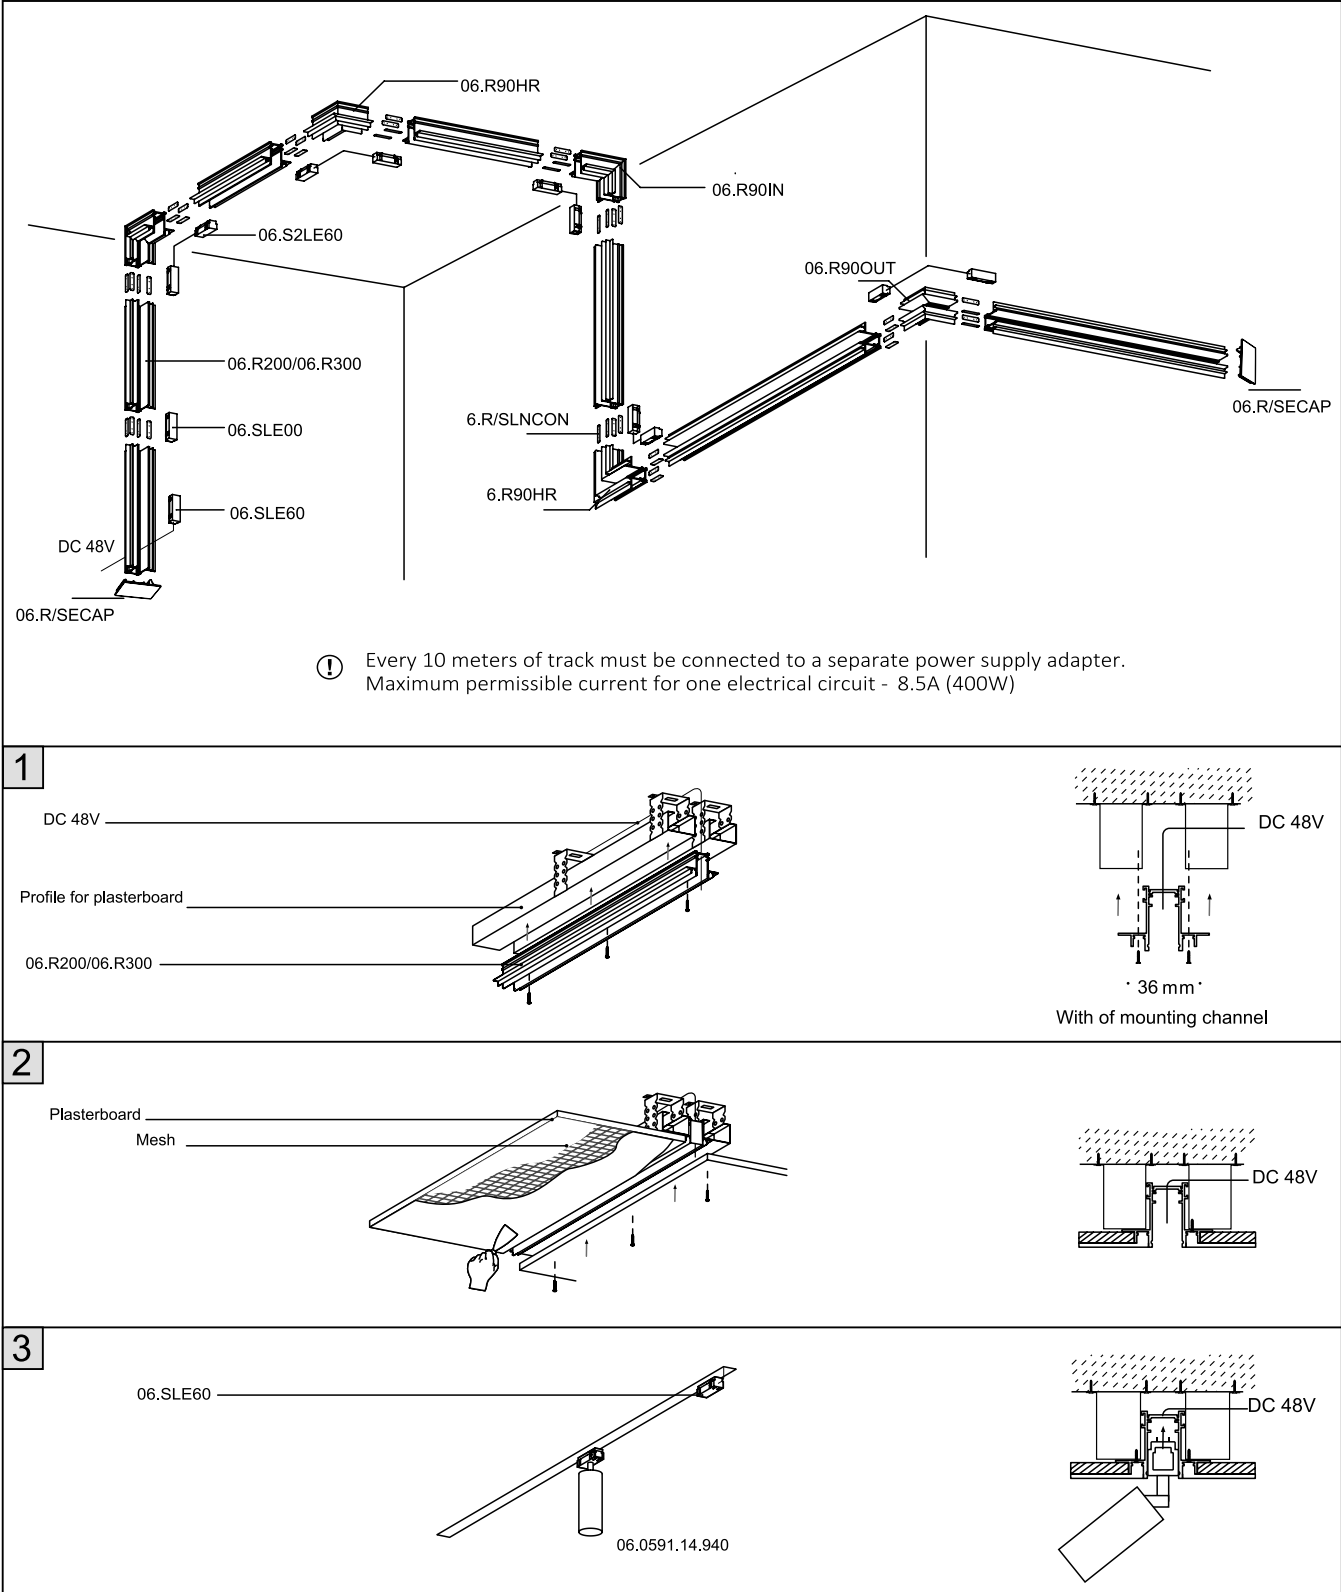


INSTALLATION SURFACE TRACK SYSTEM IN_LINE TRACK S

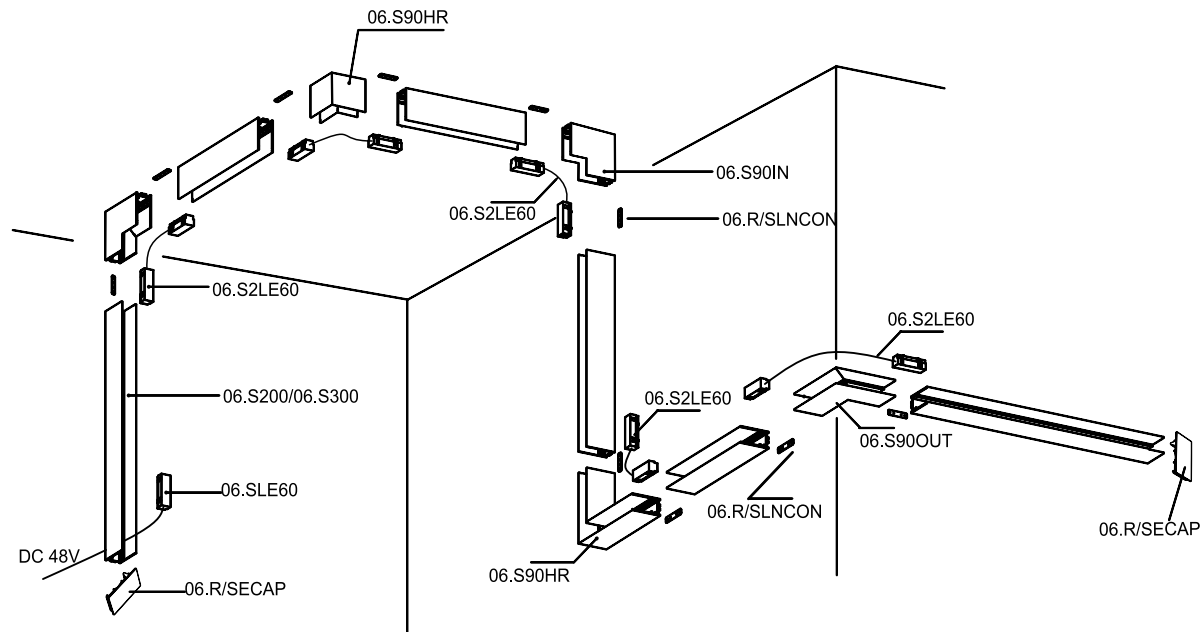


ⓘ Every 10 meters of track must be connected to a separate power supply adapter.
Maximum permissible current for one electrical circuit - 8.5A (400W)

INSTALLATION SUSPENDED TRACK SYSTEM IN_LINE

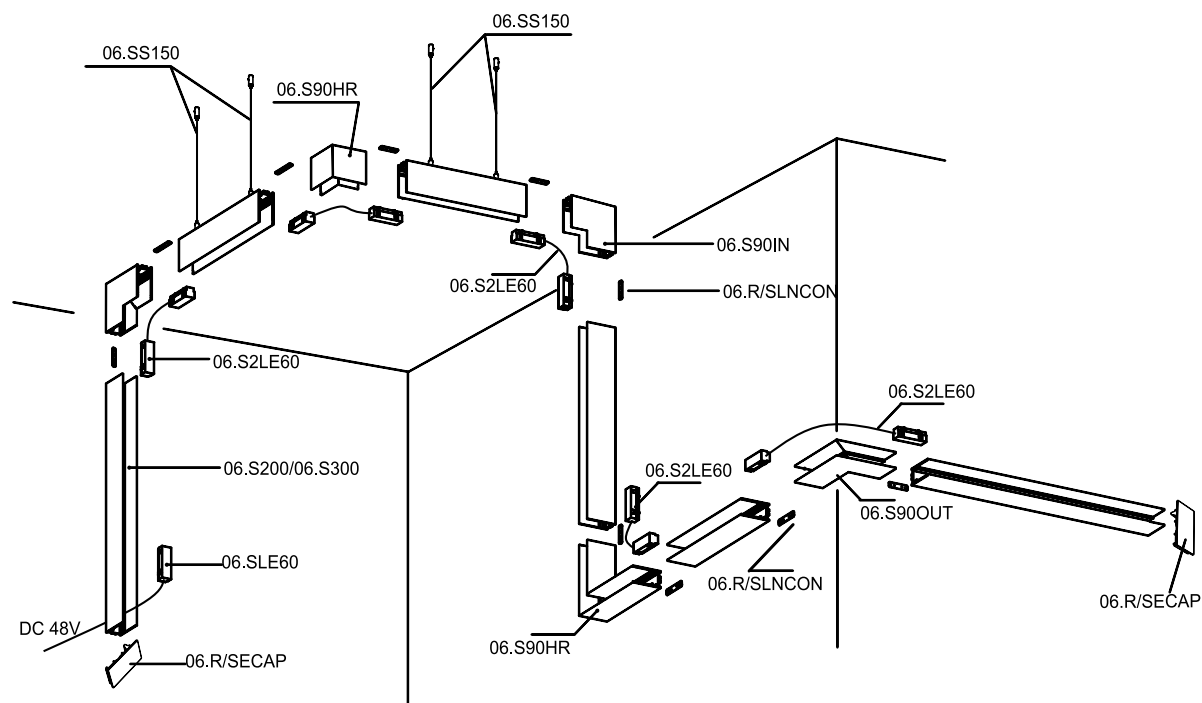



ⓘ Every 10 meters of track must be connected to a separate power supply adapter.
Maximum permissible current for one electrical circuit - 8.5A (400W)

INSTALLATION SURFACE TRACK SYSTEM IN_LINE SHORT TRACK S

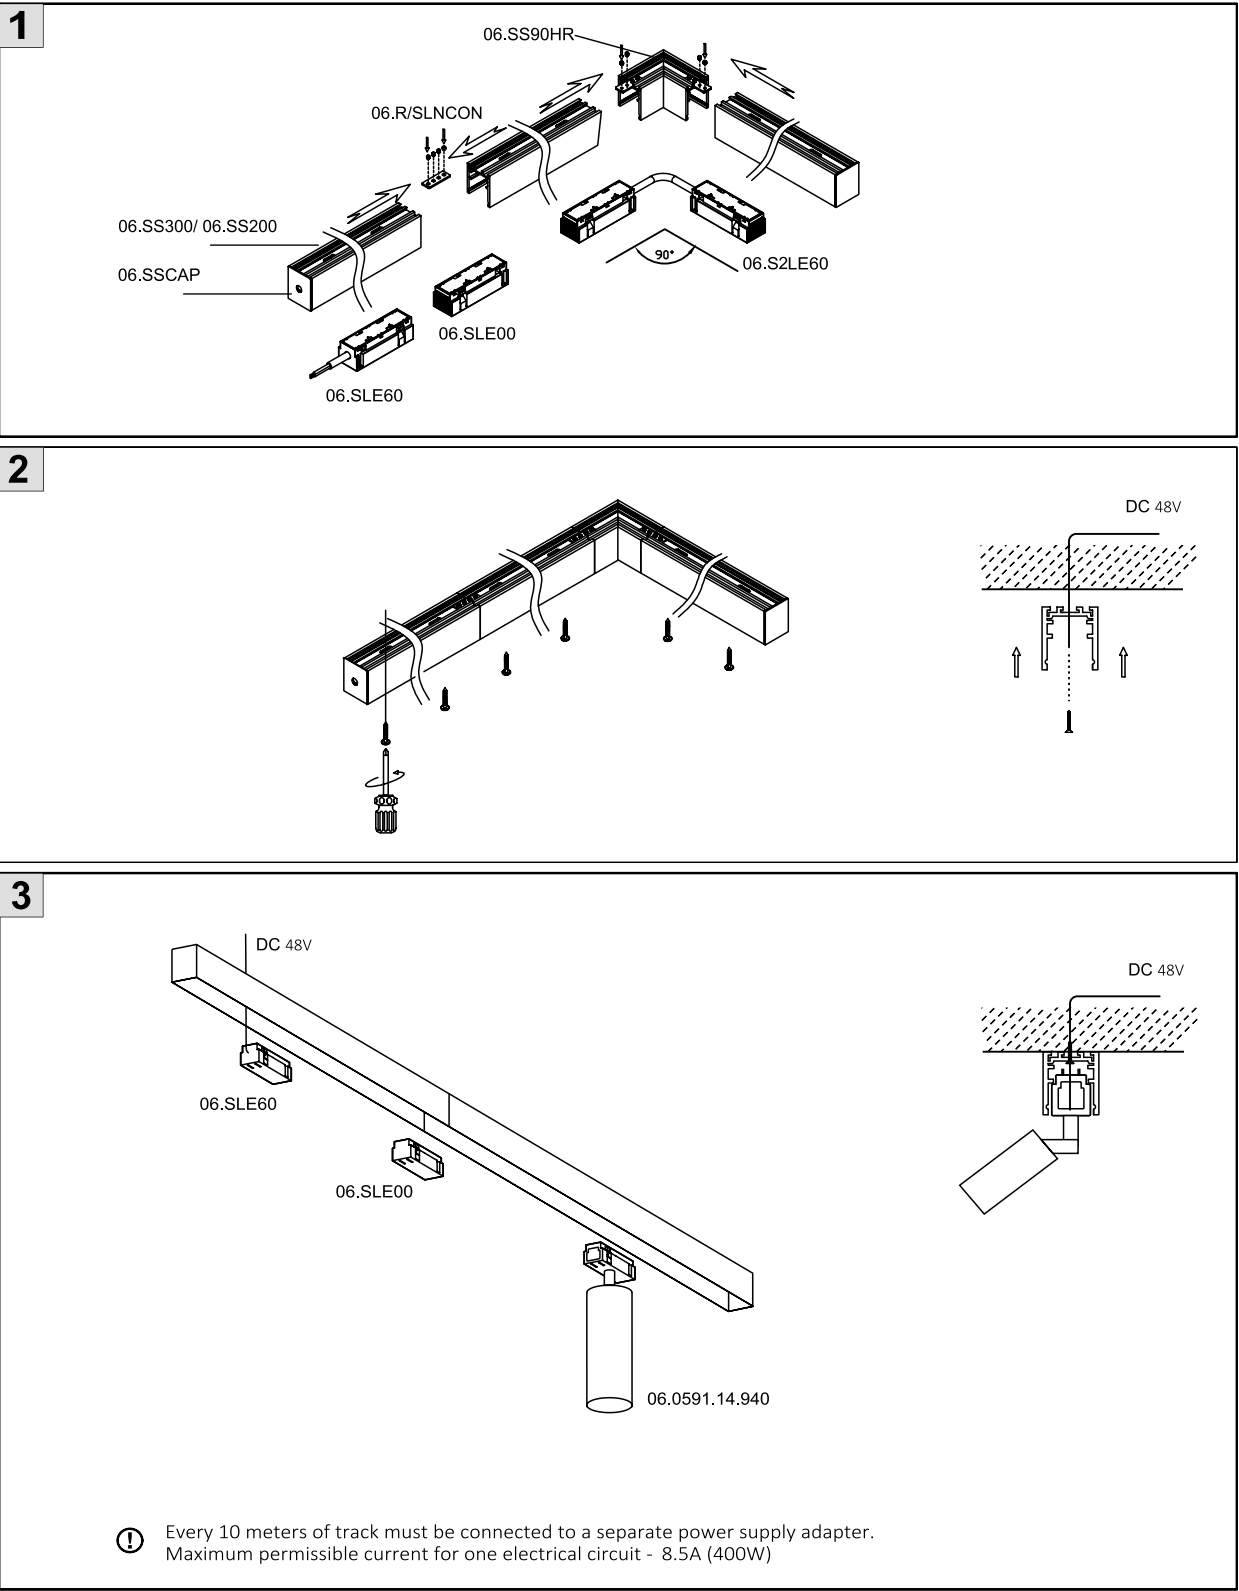



IN_LINE LINEA 205



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2050.6.930.WH	406	6	3000	>90	White
06.2050.6.930.BK	406	6	3000	>90	Black
06.2050.6.940.WH	435	6	4000	>90	White
06.2050.6.940.BK	435	6	4000	>90	Black

LED

CE

ENEC

IP20

48V



EXCL

opal

MATERIAL | AL PC

» 318

IN_LINE LINEA 407



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.4070.11.930.WH	782	11	3000	>90	White
06.4070.11.930.BK	782	11	3000	>90	Black
06.4070.11.940.WH	810	11	4000	>90	White
06.4070.11.940.BK	810	11	4000	>90	Black

LED

CE

ENEC

IP20

48V



EXCL

opal

MATERIAL | AL PC

» 318

IN_LINE LINEA 800



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.8000.18.930.WH	1450	18	3000	>90	White
06.8000.18.930.BK	1450	18	3000	>90	Black
06.8000.18.940.WH	1495	18	4000	>90	White
06.8000.18.940.BK	1495	18	4000	>90	Black

LED

CE

ENEC

IP20


48V

EXCL

opal

MATERIAL | AL PC


» 318

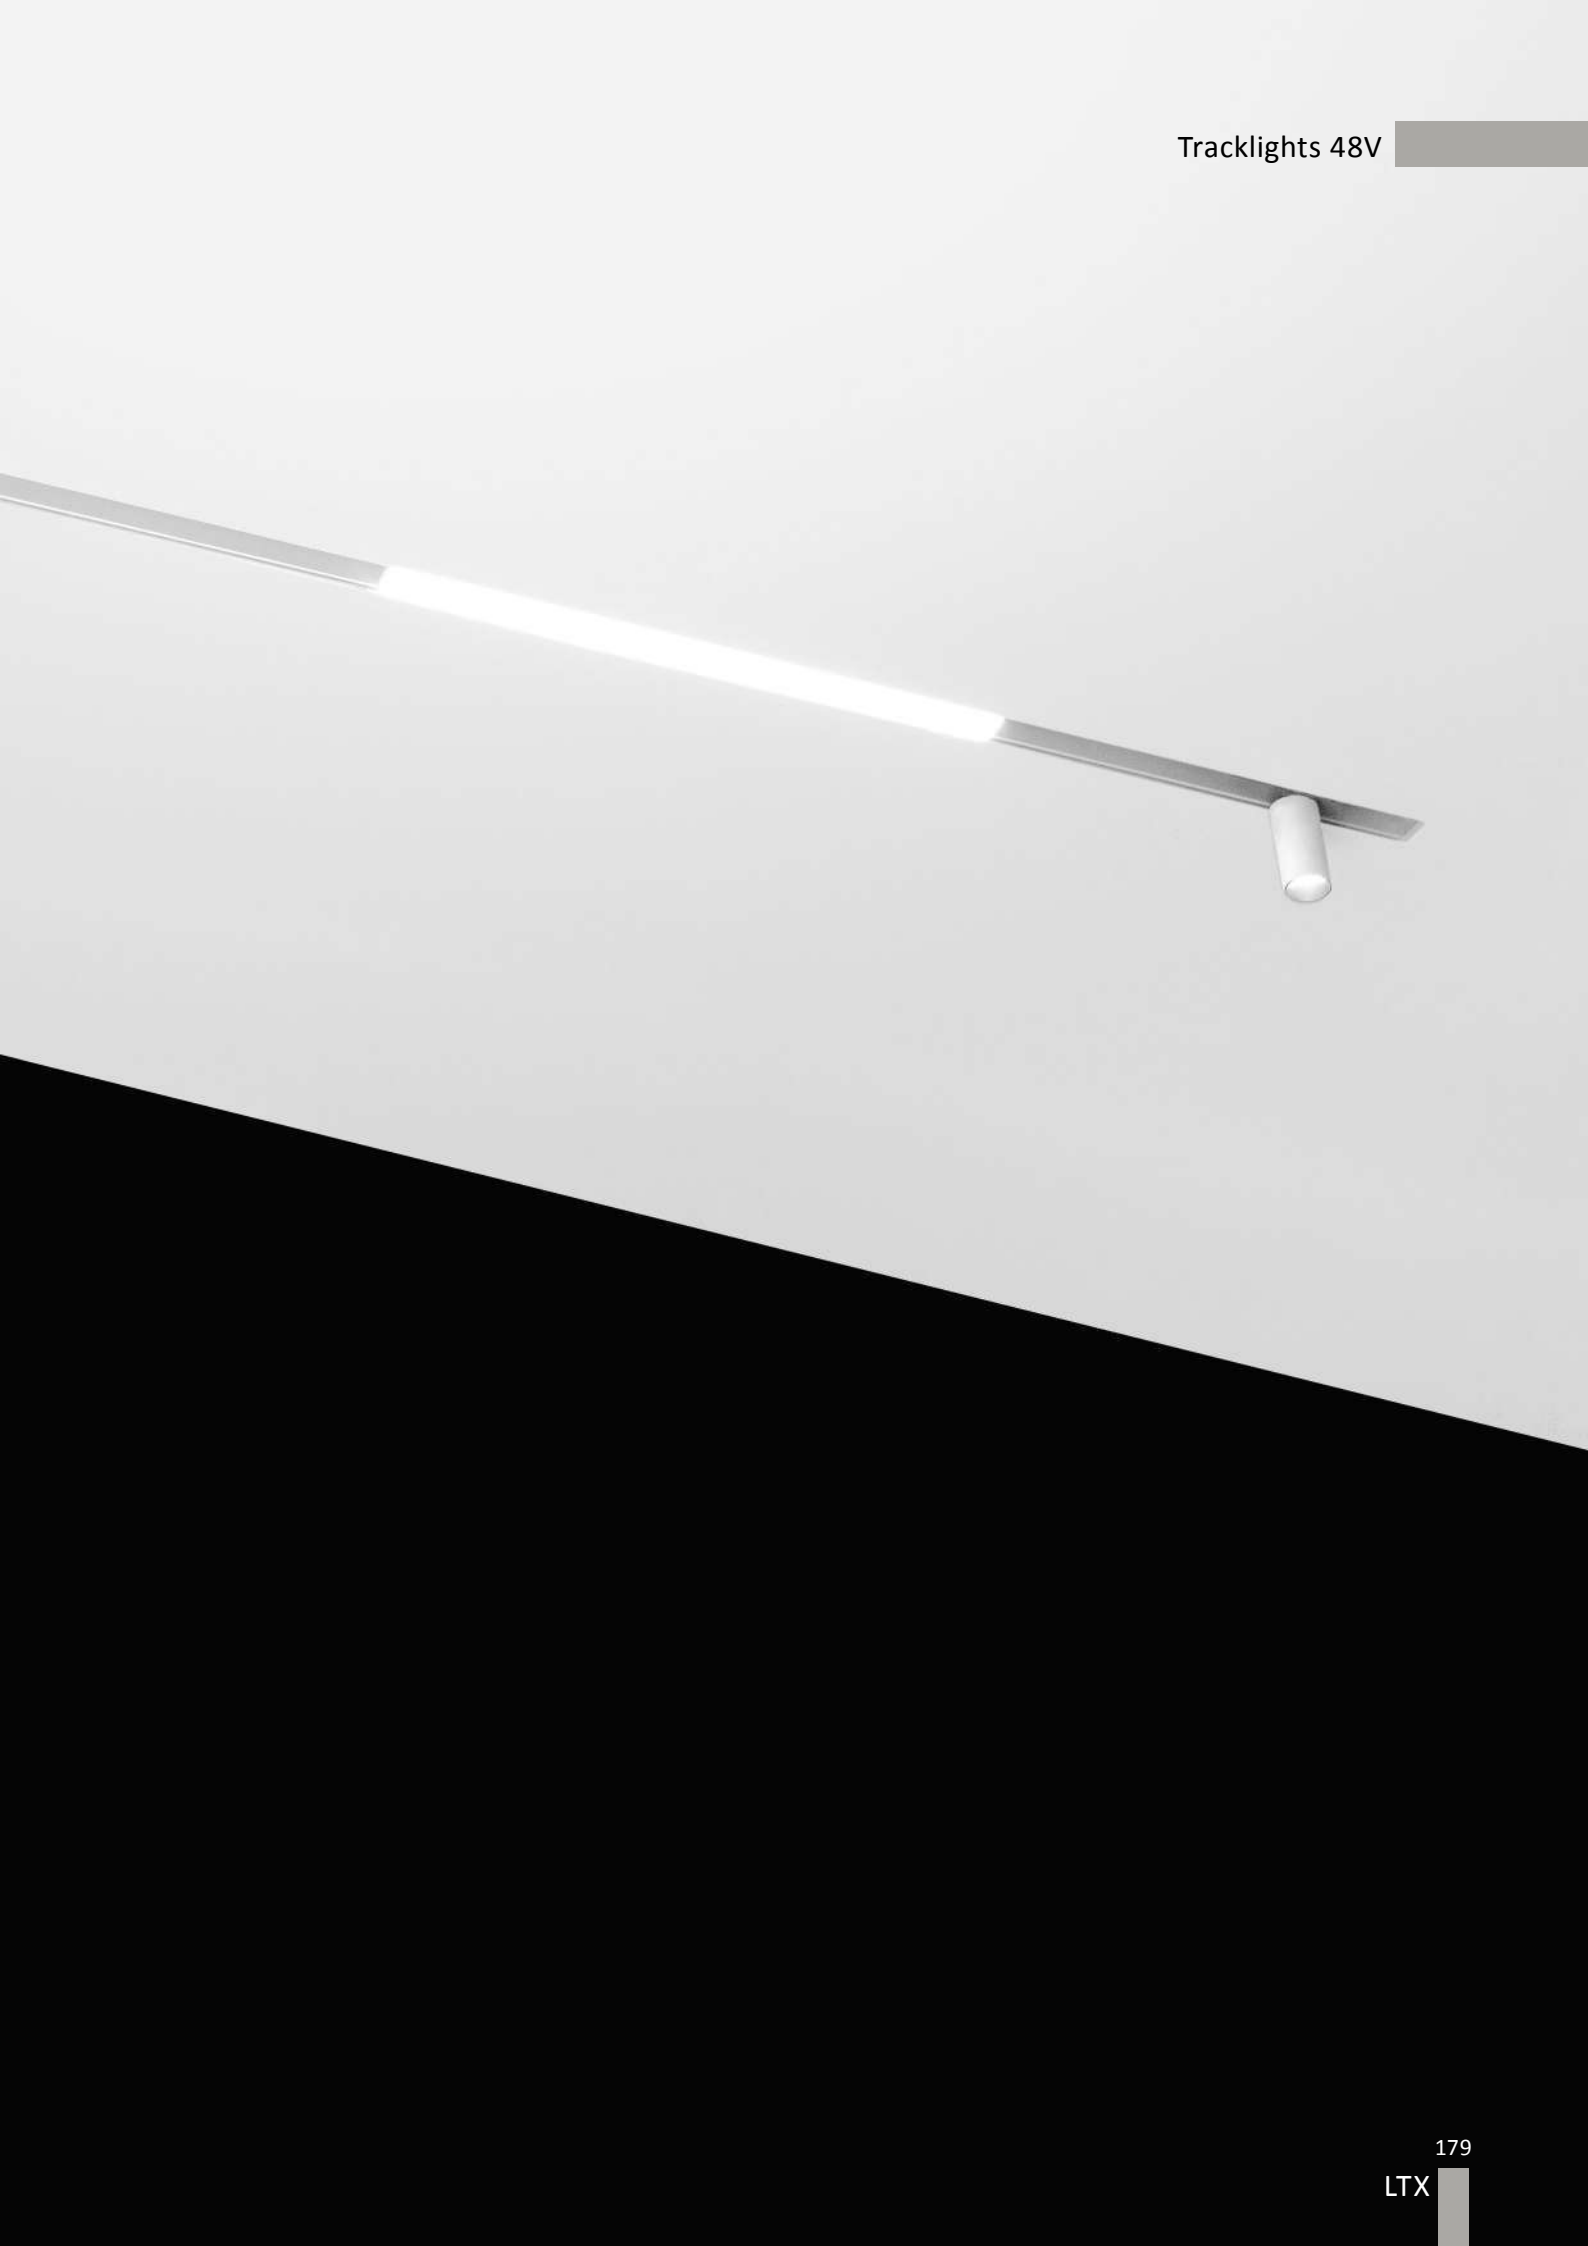

IN_LINE COMFORT 69



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0691.4.930.BK	273	4	3000	>90	Black
06.0691.4.940.BK	330	4	4000	>90	Black



LED

CE

EMC

IP20

48V


MATERIAL | AL PC

» 318

IN_LINE COMFORT 137



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.1371.8.930.BK	557	8	3000	>90	Black
06.1371.8.940.BK	684	8	4000	>90	Black



LED

CE

EMC

IP20

48V


MATERIAL | AL PC

» 318

IN_LINE COMFORT 205



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2051.12.930.WH	850	12	3000	>90	White
06.2051.12.930.BK	850	12	3000	>90	Black
06.2051.12.940.WH	850	12	4000	>90	White
06.2051.12.940.BK	850	12	4000	>90	Black



LED

CE

EMC

IP20

48V


MATERIAL | AL PC

» 318

IN_LINE COMFORT 407



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.4071.20.930.WH	1700	20	3000	>90	White
06.4071.20.930.BK	1700	20	3000	>90	Black
06.4071.20.940.WH	1700	20	4000	>90	White
06.4071.20.940.BK	1700	20	4000	>90	Black



LED

CE

EMC

IP20

48V


MATERIAL | AL PC

» 318

IN_LINE WALL WASHER 205



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2055.10.930.BK	990	10	3000	>90	Black
06.2055.10.940.BK	1025	10	4000	>90	Black



LED

CE

EMC

IP20

48V

MATERIAL | AL PC


» 318



IN_LINE TUB XS A22 X2



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2221.4.930.WH	2 x 90	2 x 2	3000	>90	White
06.2221.4.930.BK	2 x 90	2 x 2	3000	>90	Black
06.2221.4.930.BR	2 x 77	2 x 2	3000	>90	Brass
06.2221.4.930.CR	2 x 77	2 x 2	3000	>90	Chrome



LED

CE

ERC

IP20

48V

MATERIAL | AL PC

» 318



06.2221.4.930.WH



06.2221.4.930.BK





06.2221.4.930.BR




06.2221.4.930.CR



IN_LINE COMFORT B 205




Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2052.12.930.BK	850	12	3000	>90	Black
06.2052.12.940.BK	850	12	4000	>90	Black




MATERIAL | AL PC

» 318

IN_LINE LINEA B 205



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2053.6.930.WH	410	6	3000	>90	White
06.2053.6.930.BK	410	6	3000	>90	Black
06.2053.6.940.WH	424	6	4000	>90	White
06.2053.6.940.BK	424	6	4000	>90	Black





MATERIAL | AL PC

» 318



IN_LINE LED INDIRECT



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.SUPPCB.930	1450	12	3000	>90	White
06.SUPPCB.940	1450	12	4000	>90	White

LED

CE

ERC

LEDs/cut 15/175mm

MATERIAL | AL PC

» 318

Code	Dimensions (mm): LxWxH	Color
Diffuser for tracks IN_LINE S & IN_LINE SHORT TRACK S 06.SUPCOV	1000 x 24 x 5,3	Transparent


LED

CE


IP20

MATERIAL | PC


» 318

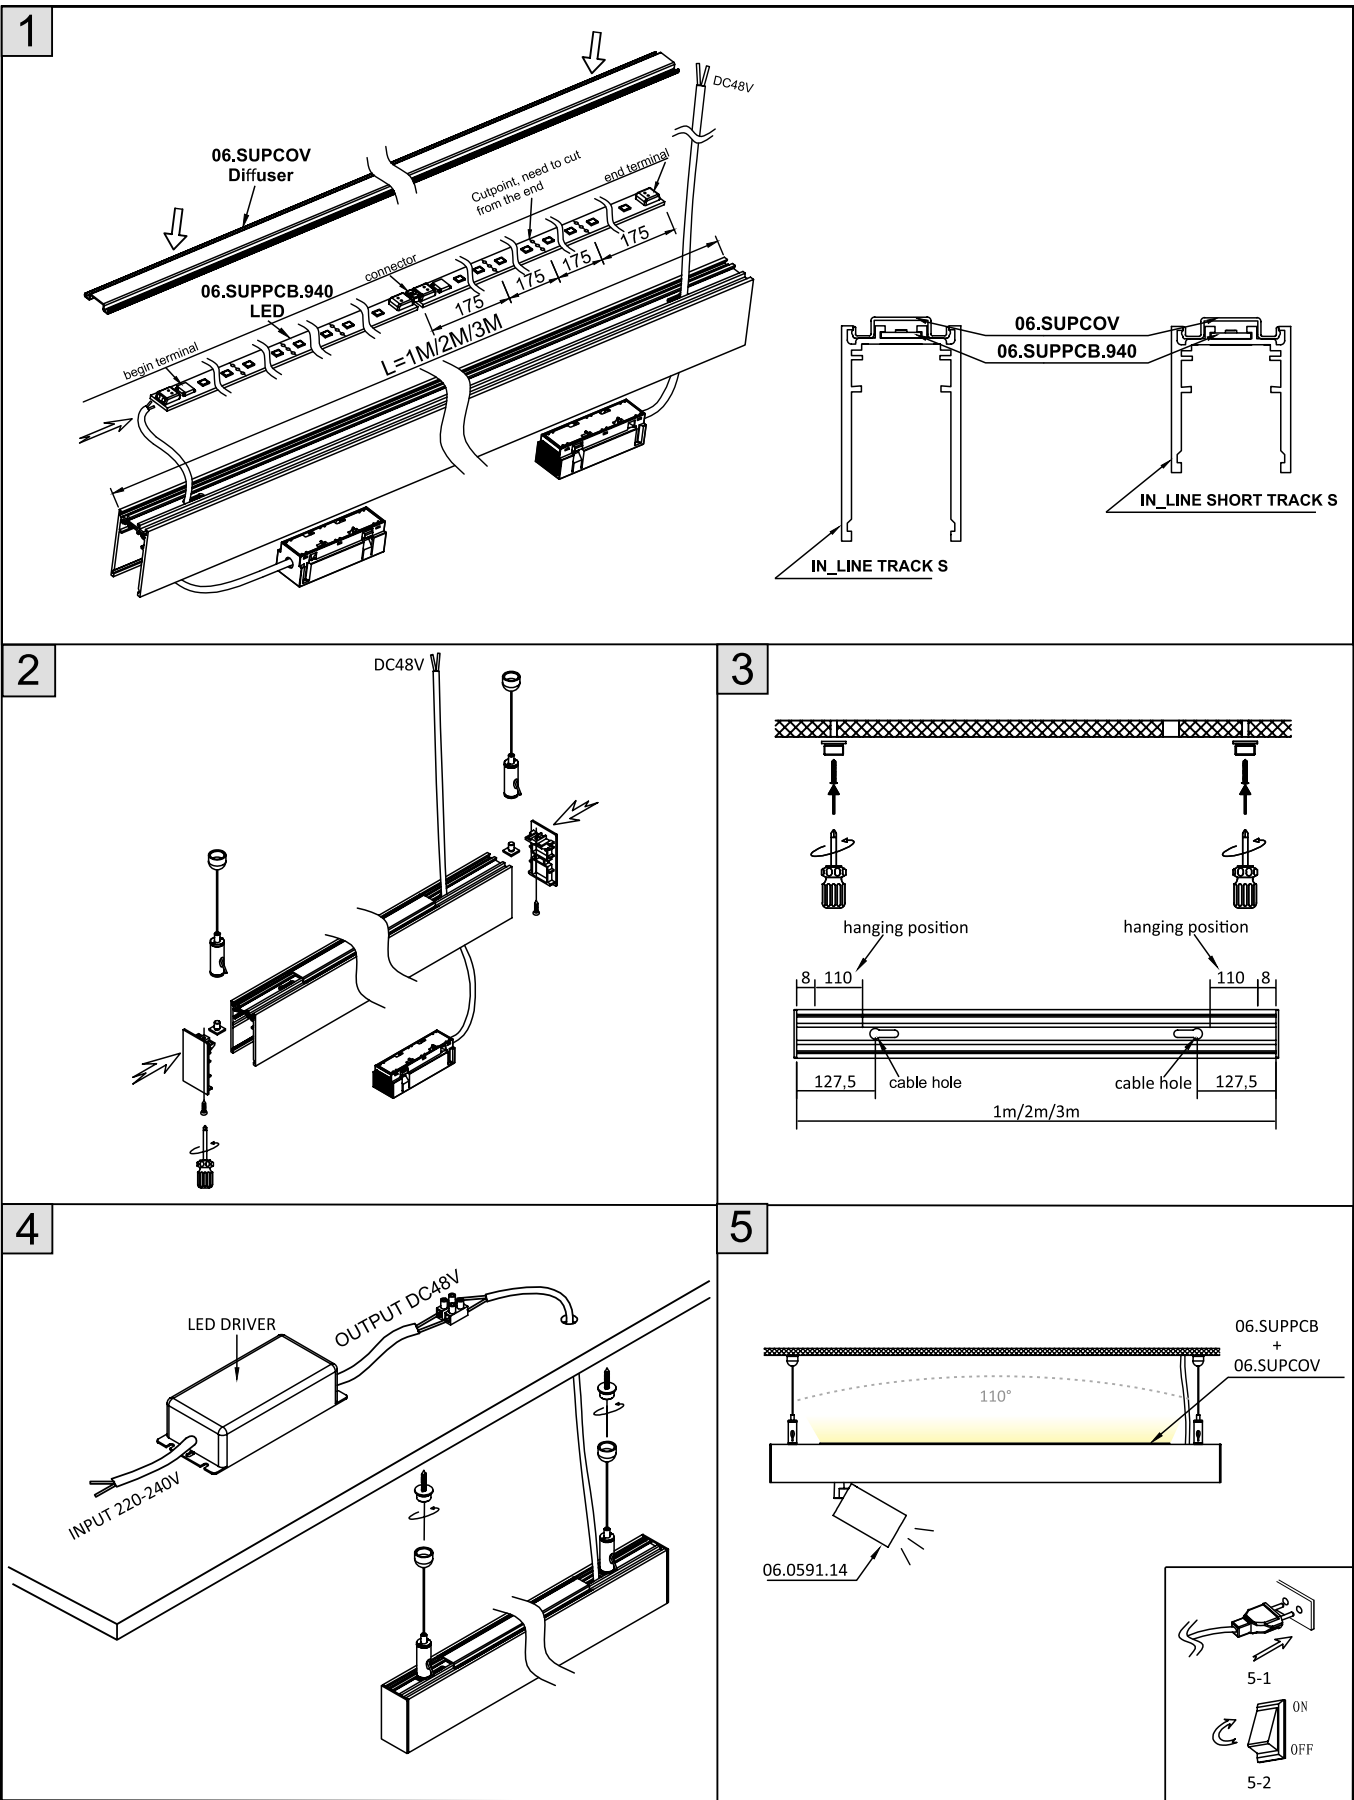

IN_LINE TUB XS A 48



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0248.02.930.WH	112	2,1	3000	>90	White
06.0248.02.930.BK	112	2,1	3000	>90	Black



LED

CE


ERC

IP20


48V

MATERIAL | AL PC

» 318





06.0248.02.930.WH



06.0248.02.930.BK



IN_LINE TUB S A 60



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0361.8.930.WH	570	5,4	3000	>90	White
06.0361.8.930.BK	570	5,4	3000	>90	Black
06.0361.8.930.WHW	570	5,4	3000	>90	White/White
06.0361.8.930.BR	570	5,4	3000	>90	Brass
06.0361.8.930.CR	570	5,4	3000	>90	Chrome
NEW 06.0361.8.930.DB	570	5,4	3000	>90	Diamond black
NEW 06.0361.8.930.SB	570	5,4	3000	>90	Sahara beige
06.0361.8.940.WH	620	5,4	4000	>90	White
06.0361.8.940.BK	620	5,4	4000	>90	Black
06.0361.8.940.WHW	620	5,4	4000	>90	White/White
06.0361.8.940.BR	620	5,4	4000	>90	Brass
06.0361.8.940.CR	620	5,4	4000	>90	Chrome
NEW 06.0361.8.940.DB	620	5,4	4000	>90	Diamond black
NEW 06.0361.8.940.SB	620	5,4	4000	>90	Sahara beige

LED CE ENEC IP20 48V EXCL 50° Tilt Rotate

MATERIAL | AL PC

» 318

ACCESSORIES

Honeycomb	06.A03HC
Lens 24°	06.A03LS24
Lens 32°	06.A03LS32

» 313



06.0361.8.930.BR



06.0361.8.930.CR




06.0361.8.930.DB



06.0361.8.930.SB

IN_LINE TUB S A 60 X2



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2301.14.930.WH	2 x 504	2 x 4,5	3000	>90	White
06.2301.14.930.BK	2 x 504	2 x 4,5	3000	>90	Black
06.2301.14.930.BR	2 x 504	2 x 4,5	3000	>90	Brass
06.2301.14.930.CR	2 x 504	2 x 4,5	3000	>90	Chrome
NEW 06.2301.14.930.DB	2 x 504	2 x 4,5	3000	>90	Diamond black
NEW 06.2301.14.930.SB	2 x 504	2 x 4,5	3000	>90	Sahara beige
06.2301.14.940.WH	2 x 536	2 x 4,5	4000	>90	White
06.2301.14.940.BK	2 x 536	2 x 4,5	4000	>90	Black
06.2301.14.940.BR	2 x 536	2 x 4,5	4000	>90	Brass
06.2301.14.940.CR	2 x 536	2 x 4,5	4000	>90	Chrome
NEW 06.2301.14.940.DB	2 x 536	2 x 4,5	4000	>90	Diamond black
NEW 06.2301.14.940.SB	2 x 536	2 x 4,5	4000	>90	Sahara beige

LED CE ENEC IP20 48V EXCL 50° Tilt Rotate

MATERIAL | AL PC


» 318

ACCESSORIES


Honeycomb	06.A03HC
Lens 24°	06.A03LS24
Lens 32°	06.A03LS32

» 313

IN_LINE ZOOM S



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0369.6.930.WH	228 - 307	5,4	3000	>90	White
06.0369.6.930.BK	228 - 307	5,4	3000	>90	Black
06.0369.6.940.WH	240 - 322	5,4	4000	>90	White
06.0369.6.940.BK	240 - 322	5,4	4000	>90	Black



LED

CE

ERC

IP20

48V

EXCL

15°-50°

Tilt

Rotate

MATERIAL |

AL

PC


i

» 318

IN_LINE ZOOM



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0599.13.930.WH	615 - 1040	13	3000	>90	White
06.0599.13.930.BK	615 - 1040	13	3000	>90	Black
06.0599.13.940.WH	615 - 1040	13	4000	>90	White
06.0599.13.940.BK	615 - 1040	13	4000	>90	Black



LED

CE

ERC

IP20

48V

EXCL

15°-50°

Tilt

Rotate


MATERIAL |

AL

PC

i

» 318



06.0369.6.930.WH



06.0369.6.930.BK



06.0599.13.930.WH




06.0599.13.930.BK

IN_LINE TUB M NB



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0595.9.930.WH	640	10	3000	>90	White
06.0595.9.930.BK	640	10	3000	>90	Black
06.0595.9.940.WH	640	10	4000	>90	White
06.0595.9.940.BK	640	10	4000	>90	Black



LED

CE

ERC

IP20

48V

EXCL

6°

Tilt

Rotate

MATERIAL |

AL

PC

i

» 318




06.0595.9.930.WH



06.0595.9.930.BK

IN_LINE GALLERY



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.5160.13.930.WH	600	6,3	3000	>90	White
06.5160.13.930.BK	600	6,3	3000	>90	Black
06.5160.13.940.WH	620	6,3	4000	>90	White
06.5160.13.940.BK	620	6,3	4000	>90	Black

LED

CE

EMC

IP20

48V

EXCL




Tilt

Rotate

MATERIAL | AL PC

» 318

A (mm)	H (mm)	φ (mm)
1000	320	500
2000	630	990
3000	950	1490

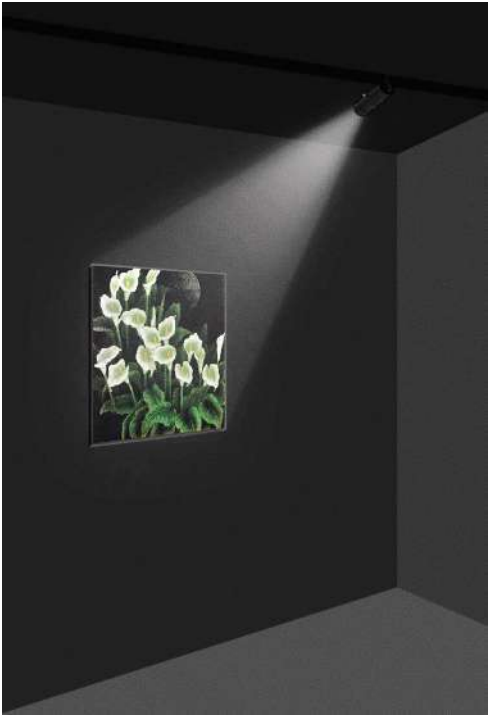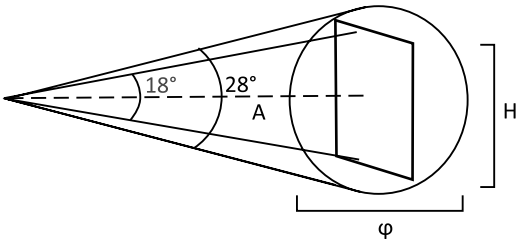


06.5160.13.930.WH




06.5160.13.930.BK



IN_LINE TUB M A 90



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0591.14.930.WH	1210	10,8	3000	>90	White
06.0591.14.930.BK	1210	10,8	3000	>90	Black
06.0591.14.930.WHW	1210	10,8	3000	>90	White/White
06.0591.14.930.BR	1210	10,8	3000	>90	Brass
06.0591.14.930.CR	1210	10,8	3000	>90	Chrome
NEW 06.0591.14.930.DB	1210	10,8	3000	>90	Diamond black
NEW 06.0591.14.930.SB	1210	10,8	3000	>90	Sahara beige
06.0591.14.940.WH	1320	10,8	4000	>90	White
06.0591.14.940.BK	1320	10,8	4000	>90	Black
06.0591.14.940.WHW	1320	10,8	4000	>90	White/White
06.0591.14.940.BR	1320	10,8	4000	>90	Brass
06.0591.14.940.CR	1320	10,8	4000	>90	Chrome
NEW 06.0591.14.940.DB	1320	10,8	4000	>90	Diamond black
NEW 06.0591.14.940.SB	1320	10,8	4000	>90	Sahara beige



MATERIAL | AL PC

» 318



06.0591.14.930.WHW



06.0591.14.930.BK



06.0591.14.930.SB



06.0591.14.930.BR



06.0591.14.930.CR




06.0591.14.930.DB


ACCESSORIES

Shield TUB M Copper	06.A05SH.CP
Shield TUB M Brass	06.A05SH.BR
Shield L TUB M Copper	06.A05SHL.CP
Shield L TUB M Brass	06.A05SHL.BR
Wall washer	06.A05WW
Snoot, black	06.A05NB
Foggy cover	06.A05FG
Honeycomb	06.A05HC
Elips diffuser	06.A05ELPS
Foggy diffuser	06.A05SFT
Lens 15°	06.A05LS15
Lens 30°	06.A05LS30

» 313

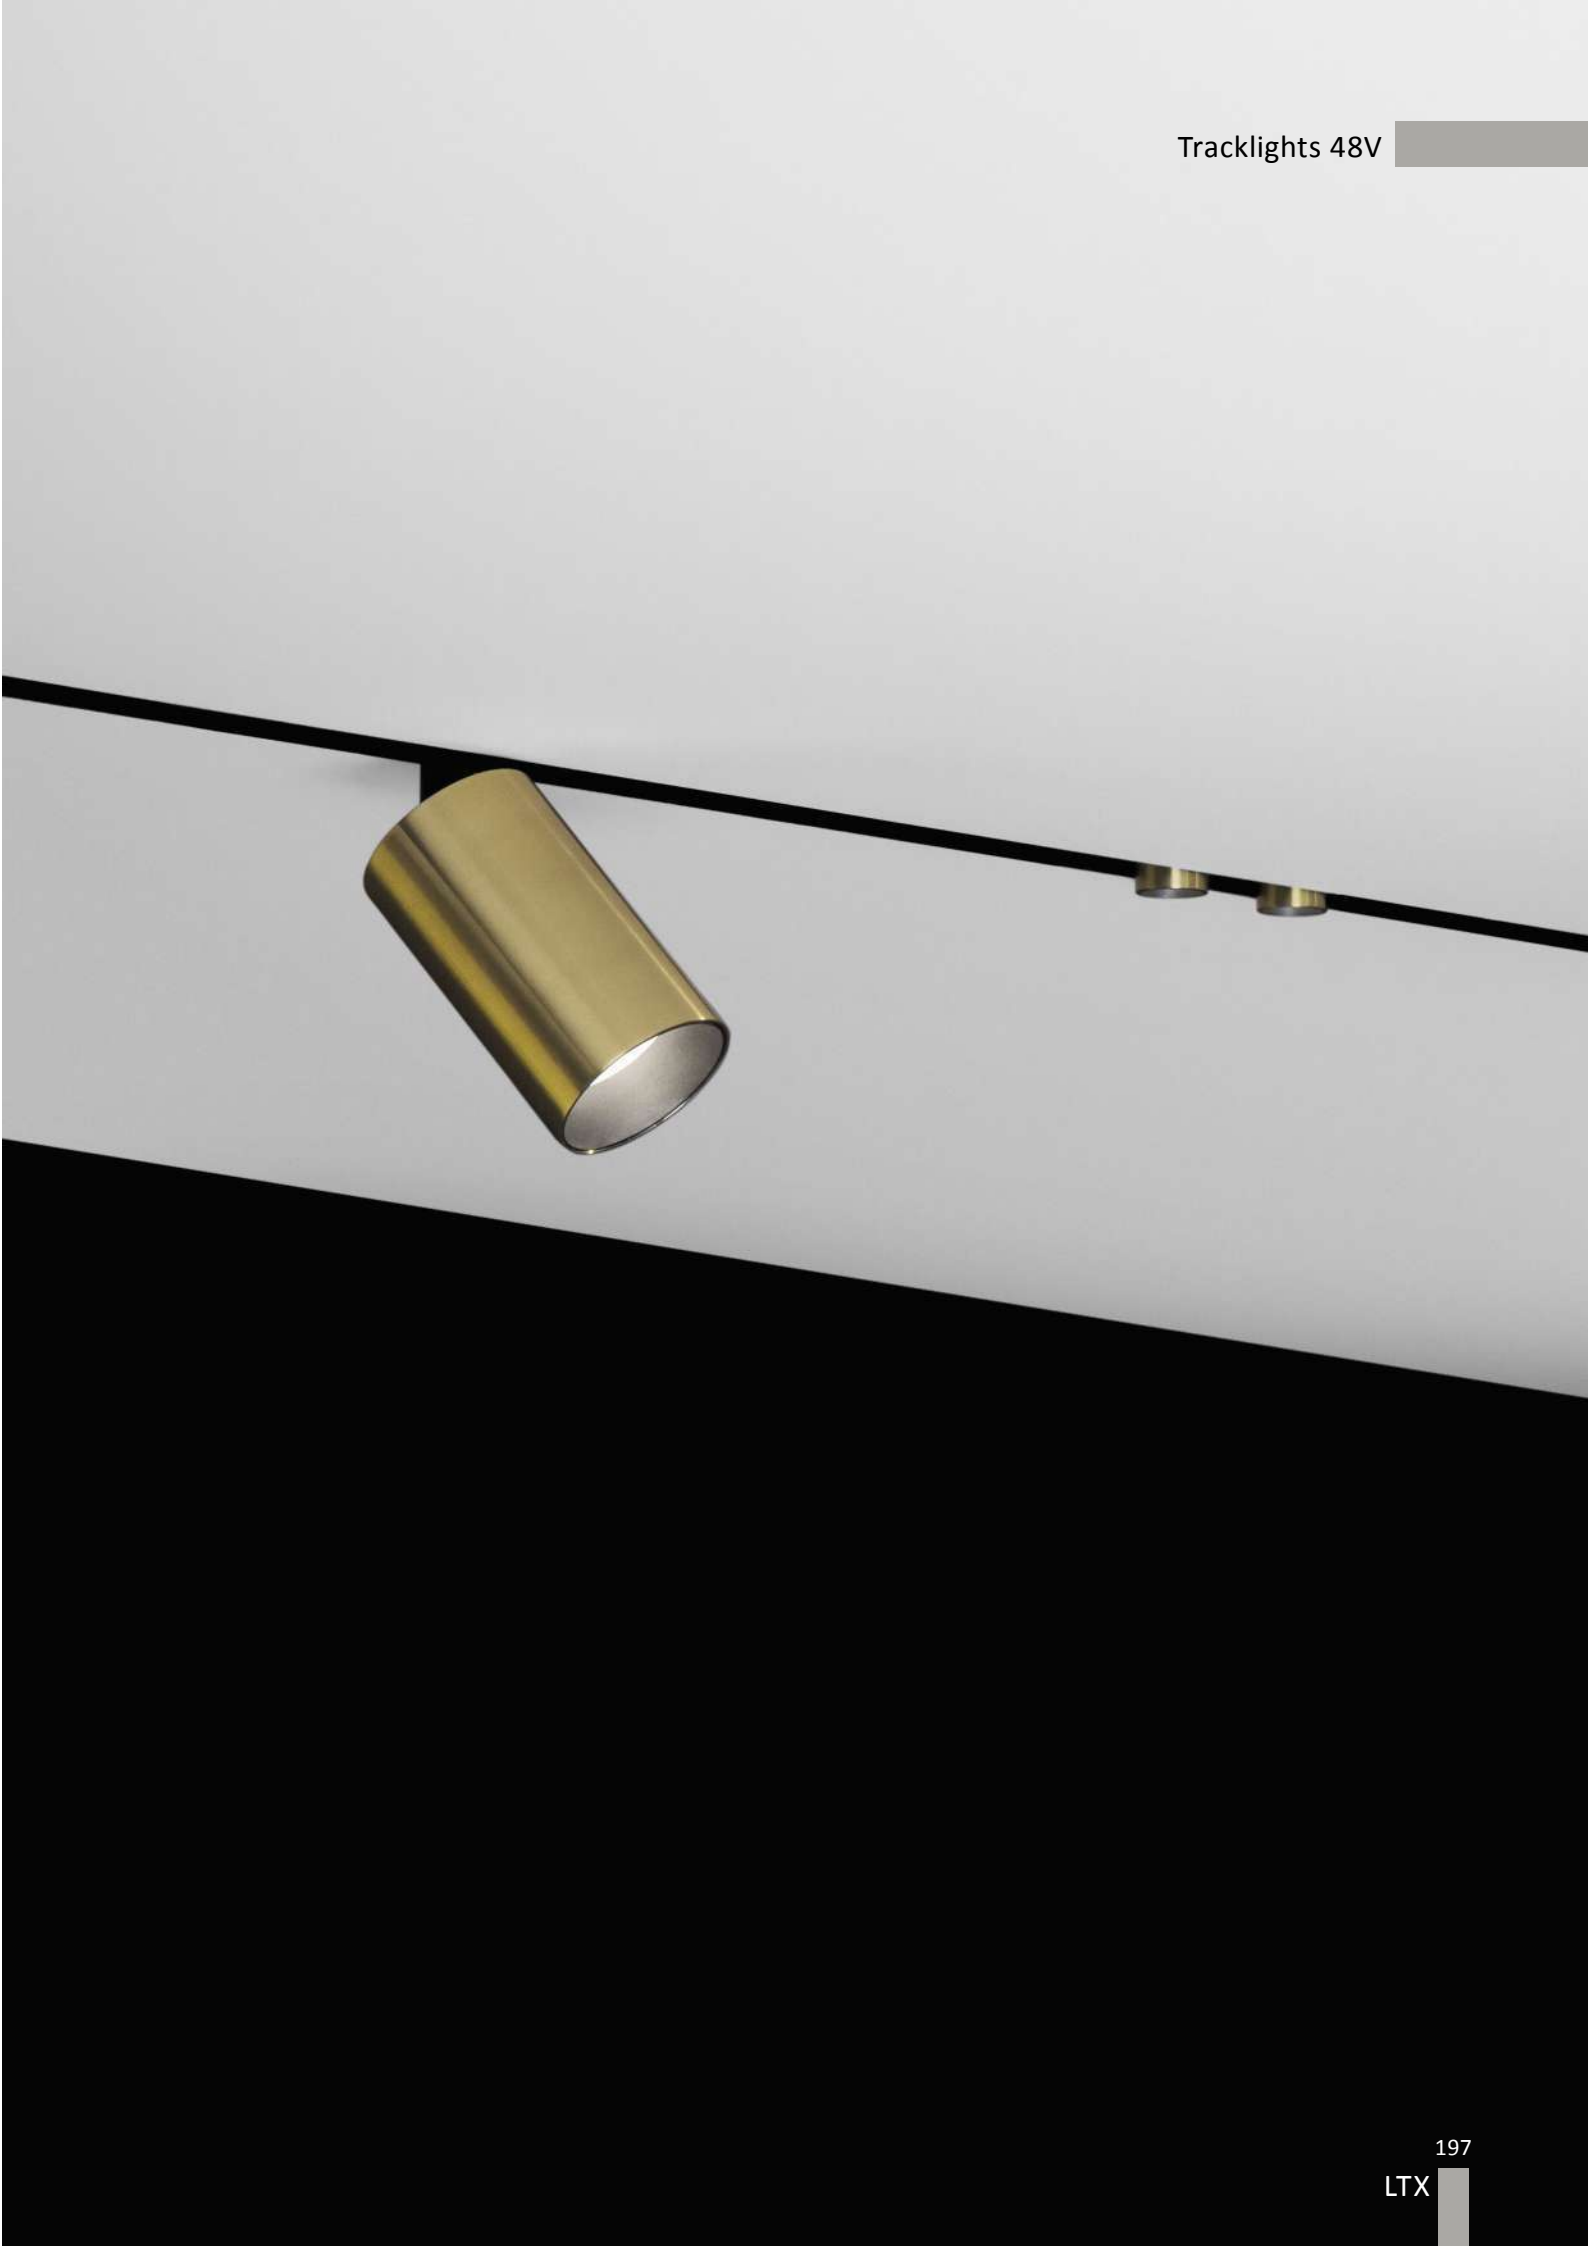

IN_LINE TUB M A 140



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0514.19.930.WH	1640	19	3000	>90	White
06.0514.19.930.BK	1640	19	3000	>90	Black
06.0514.19.940.WH	1885	19	4000	>90	White
06.0514.19.940.BK	1885	19	4000	>90	Black



MATERIAL | AL PC

» 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 313



06.0514.19.930.WH



06.0514.19.930.BK

OTHER DIM OPTIONS PLEASE CONSALT: DALI




BEZMIRNO ARCHITECTS

IN_LINE SOL MINI



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.7526.7.930.WH	640	7	3000	>90	White
06.7526.7.930.BK	640	7	3000	>90	Black
06.7526.7.940.WH	695	7	4000	>90	White
06.7526.7.940.BK	695	7	4000	>90	Black



LEDCEERCEIP2048VEXCL45°TiltRotate

MATERIAL | AL PC

» 318

ACCESSORIES		
	Replaceable ring. White color	SOL M RING WHITE
	Replaceable ring. Black color	SOL M RING BLACK
	Replaceable ring. Copper color	SOL M RING COPPER
	Replaceable ring. Brass color	SOL M RING BRASS
	Replaceable ring. Chrome color	SOL M RING CHROME
	Replaceable ring. Diamond black color	SOL M RING DIAMOND BLACK

» 313

06.7526.7.930.WH + SOL M RING BRASS

06.7526.7.930.WH + SOL M RING COPPER

06.7526.7.930.WH + SOL M RING CHROME

06.7526.7.930.WH + SOL M RING DIAMOND BLACK

06.7526.7.930.BK + SOL M RING BRASS

06.7526.7.930.BK + SOL M RING COPPER


06.7526.7.930.BK + SOL M RING CHROME

06.7526.7.930.WH + SOL M RING DIAMOND BLACK

IN_LINE SOL



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.9533.14.930.WH	1210	10,8	3000	>90	White
06.9533.14.930.BK	1210	10,8	3000	>90	Black
06.9533.14.940.WH	1320	10,8	4000	>90	White
06.9533.14.940.BK	1320	10,8	4000	>90	Black



LEDCEERCEIP2048VEXCL38°TiltRotate

MATERIAL | AL PC

» 318

ACCESSORIES		
	Replaceable ring. White color	SOL RING WHITE
	Replaceable ring. Black color	SOL RING BLACK
	Replaceable ring. Copper color	SOL RING COPPER
	Replaceable ring. Brass color	SOL RING BRASS
	Replaceable ring. Chrome color	SOL RING CHROME
	Replaceable ring. Diamond black color	SOL RING DIAMOND BLACK
	Lens 12°	06.A09LS12

» 313

06.9533.14.930.WH + SOL RING BRASS

06.9533.14.930.WH + SOL RING COPPER

06.9533.14.930.WH + SOL RING CHROME

06.9533.14.930.WH + SOL RING DIAMOND BLACK


06.9533.14.930.BK + SOL RING BRASS

06.9533.14.930.BK + SOL RING COPPER

06.9533.14.930.BK + SOL RING CHROME

06.9533.14.930.BK + SOL RING DIAMOND BLACK

IN_LINE WIN



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.win.3.930.BK	1800	3	3000	>90	Black

LED

CE

ERL


IP20

48V

MATERIAL | AL GL

» 318

IN_LINE SFERA



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.1001.5.930.WH	498	5	3000	>90	White

LED

CE

ERL


IP20

48V


MATERIAL | AL GL

» 318

IN_LINE ART



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2420.14.930.BK	750	14	3000	>90	Black



LED

CE

ERL


IP20

48V


MATERIAL | AL PC

» 318

IN_LINE STICKS



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.8003.20.830.BK	2400	20	3000	>90	Black



LED

CE

ENEC

IP20

48V

MATERIAL | AL PC

» 318




OTHER DIM OPTIONS PLEASE CONSALT: DALI



IN_LINE BALL M



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.1000.7.930.WH	590	7	3000	>90	White
06.1000.7.930.BK	590	7	3000	>90	Black




MATERIAL | AL GL

» 318

IN_LINE BALL L




Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.1800.28.930.WH	2181	28	3000	>90	White
06.1800.28.930.BK	2181	28	3000	>90	Black



MATERIAL | AL GL


» 318



CLICK TO TURN
ON / OFF
TOUCH
TO DIMM




06.1000.7.930.WH



06.1000.7.930.BK





06.1800.28.930.WH



06.1800.28.930.BK

IN_LINE TUB XS P




Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0160.2.930.WH	137	2,4	3000	>90	White
06.0160.2.930.BK	137	2,4	3000	>90	Black
06.0160.2.930.BR	137	2,4	3000	>90	Brass


LED CE ENEC IP20 48V EXCL 20°

MATERIAL | AL PC

» 318



06.0160.2.930.WH




06.0160.2.930.BK



06.0160.2.930. BR



IN_LINE MATCH 450



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0340.7.930.BR	415	7	3000	>90	Brass
06.0340.7.940.BR	415	7	4000	>90	Brass

LED

CE

ERC


IP20

48V

MATERIAL | BR PC

» 318

IN_LINE MATCH 550



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0350.7.930.BR	415	7	3000	>90	Brass
06.0350.7.940.BR	415	7	4000	>90	Brass

LED

CE

ERC

IP20



48V

MATERIAL | BR PC

» 318



IN_LINE TUB S P 200



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0320.8.930.WH	558	8	3000	>90	White
06.0320.8.930.BK	558	8	3000	>90	Black
06.0320.8.930.BR	558	8	3000	>90	Brass
NEW 06.0320.8.930.DB	558	8	3000	>90	Diamond black
06.0320.8.940.WH	558	8	4000	>90	White
06.0320.8.940.BK	558	8	4000	>90	Black
06.0320.8.940.BR	558	8	4000	>90	Brass
NEW 06.0320.8.940.DB	558	8	4000	>90	Diamond black




MATERIAL | AL PC

» 318


ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

» 313



06.0320.8.930.WH



06.0320.8.930.BK




06.0320.8.930.BR



06.0320.8.930.DB

IN_LINE TUB S P 300



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0331.8.930.WH	389	8	3000	>90	White
06.0331.8.930.BK	389	8	3000	>90	Black
NEW 06.0331.8.930.BR	389	8	3000	>90	Brass
06.0331.8.940.WH	474	8	4000	>90	White
06.0331.8.940.BK	474	8	4000	>90	Black
NEW 06.0331.8.940.BR	474	8	4000	>90	Brass




MATERIAL | AL PC

» 318


ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

» 313



06.0331.8.930.WH




06.0331.8.930.BK



06.0331.8.930.BR

IN_LINE TUB S P 600



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0360.8.930.WH	657	8	3000	>90	White
06.0360.8.930.BK	657	8	3000	>90	Black
06.0360.8.930.BR	657	8	3000	>90	Brass
06.0360.8.940.WH	657	8	4000	>90	White
06.0360.8.940.BK	657	8	4000	>90	Black
06.0360.8.940.BR	657	8	4000	>90	Brass



MATERIAL | AL PC

» 318


ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24
	Lens 32°	06.A03LS32

» 313



06.0360.8.930.WH




06.0360.8.930.BK



06.0360.8.930. BR

IN_LINE TUB S P 300 ZOOM




Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0339.6.930.WH	228 - 307	5,4	3000	>90	White
06.0339.6.930.BK	228 - 307	5,4	3000	>90	Black
06.0339.6.940.WH	228 - 307	5,4	4000	>90	White
06.0339.6.940.BK	228 - 307	5,4	4000	>90	Black



MATERIAL | AL PC

» 318



06.0339.6.930.WH



06.0339.6.930.BK

IN_LINE TUB M P 200



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0521.19.930.WH	1280	10,8	3000	>90	White
06.0521.19.930.BK	1280	10,8	3000	>90	Black
06.0521.19.940.WH	1348	10,8	4000	>90	White
06.0521.19.940.BK	1348	10,8	4000	>90	Black

LED

CE

ERC

IP20

48V

MATERIAL | AL PC

i

» 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

i

» 313



06.0521.19.930.WH + 06.A05SH.BR



06.0521.19.930.BK + 06.A05SH.BR



06.0521.19.930.WH + 06.A05SHL.BR



06.0521.19.930.BK + 06.A05SHL.BR



06.0521.19.930.WH + 06.A05SH.CP



06.0521.19.930.BK + 06.A05SH.CP



06.0521.19.930.WH + 06.A05SHL.CP



06.0521.19.930.BK + 06.A05SHL.CP

IN_LINE TUB M P 200 ZOOM



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0529.13.930.WH	615-1040	13	3000	>90	White
06.0529.13.930.BK	615-1040	13	3000	>90	Black
06.0529.13.940.WH	615-1040	13	4000	>90	White
06.0529.13.940.BK	615-1040	13	4000	>90	Black

LED

CE

ERC


IP20

48V

MATERIAL | AL PC

i

» 318




06.0529.13.930.WH



06.0529.13.930.BK

IN_LINE CONE

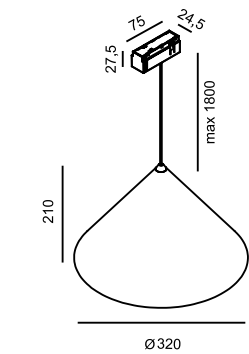


Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.3200.12.930.BK	715	12	3000	>90	Black

LED CE ENEC IP20 48V EXCL opal

MATERIAL | AL PC

i » 318

IN_LINE DISK




Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.1570.15.930.BK	715	15	3000	>90	Black

LED CE ENEC IP20 48V EXCL opal

MATERIAL | AL PC

i » 318





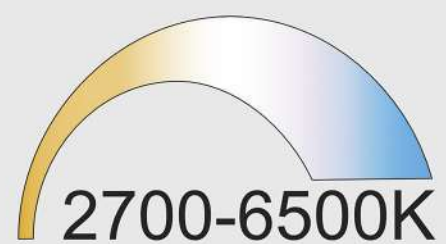


SERIES LUMINAIRES IN_LINE TUNABLE WHITE

The IN_LINE TRACK series features luminaires with Tunable White (TW) color temperature and brightness control technology from 2700K to 6500K. Dimming and color temperature changes are controlled separately from each other.

IN_LINE LINEA 205 TW





Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2050.6.TW.WH	419 - 435	6	2700 - 6500	>90	White
06.2050.6.TW.BK	419 - 435	6	2700 - 6500	>90	Black




MATERIAL | AL PC [i](#) » 318

IN_LINE LINEA 407 TW





Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.4070.11.TW.WH	733 - 834	11	2700 - 6500	>90	White
06.4070.11.TW.BK	733 - 834	11	2700 - 6500	>90	Black



MATERIAL | AL PC [i](#) » 318

IN_LINE COMFORT 205 TW




Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2051.10.TW.WH	563 - 632	10	2700 - 6500	>90	White
06.2051.10.TW.BK	563 - 632	10	2700 - 6500	>90	Black




MATERIAL | AL PC [i](#) » 318

IN_LINE COMFORT B 205 TW




Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2052.10.TW.BK	563 - 632	10	2700 - 6500	>90	Black




MATERIAL | AL PC [i](#) » 318

IN_LINE LINEA B 205 TW



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.2053.6.TW.WH	419 - 435	10	2700 - 6500	>90	White
06.2053.6.TW.BK	419 - 435	10	2700 - 6500	>90	Black



MATERIAL | AL PC [i](#) » 318



06.2053.6.TW.WH




06.2053.6.TW.BK

IN_LINE TUB S A 60 TW



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0361.6.TW.WH	393 - 454	6,3	2700 - 6500	>90	White
06.0361.6.TW.BK	393 - 454	6,3	2700 - 6500	>90	Black



LEDCEERELVIP2048VEXCL30°TiltRotate2700-6500K TUNABLE WHITEWIZ

MATERIAL | ALPC


i

» 318

IN_LINE TUB S A 90 TW



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0591.13.TW.WH	840 - 994	13	2700 - 6500	>90	White
06.0591.13.TW.BK	840 - 994	13	2700 - 6500	>90	Black




LEDCEERELVIP2048VEXCL30°TiltRotate2700-6500K TUNABLE WHITEWIZ

MATERIAL | ALPC

i

» 318



06.0361.6.TW.WH



06.0361.6.TW.BK



06.0591.13.TW.WH




06.0591.13.TW.BK

IN_LINE TUB S A 140 TW



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.0514.18.TW.WH	1140 - 1386	18	2700 - 6500	>90	White
06.0514.18.TW.BK	1140 - 1386	18	2700 - 6500	>90	Black



LEDCEERELVIP2048VEXCL30°TiltRotate2700-6500K TUNABLE WHITEWIZ

MATERIAL | ALPC

i


» 318

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 50°	06.A05LS50

i

» 313



06.0514.18.TW.WH




06.0514.18.TW.BK

IN_LINE SOL TW



Code	Product Lumen	Power Watt	Color T (K)	CRI	Color
06.9533.13.TW.WH	881 - 1025	13	2700 - 6500	>90	White
06.9533.13.TW.BK	881 - 1025	13	2700 - 6500	>90	Black



MATERIAL | AL PC

i » 318

ACCESSORIES

	Replaceable ring. White color	SOL RING WHITE
	Replaceable ring. Black color	SOL RING BLACK
	Replaceable ring. Copper color	SOL RING COPPER
	Replaceable ring. Brass color	SOL RING BRASS
	Replaceable ring. Chrome color	SOL RING CHROME
	NEW Replaceable ring. Diamond black color	SOL RING DIAMOND BLACK
	Lens 12°	06.A09LS12
	Lens 38°	06.A09LS38

i » 313



06.9533.13.TW .BK + SOL RING BRASS



06.9533.13.TW.BK + SOL RING COPPER




06.9533.13.TW.BK + SOL RING CHROME



06.9533.13.TW.BK + SOL RING DIAMOND BLACK



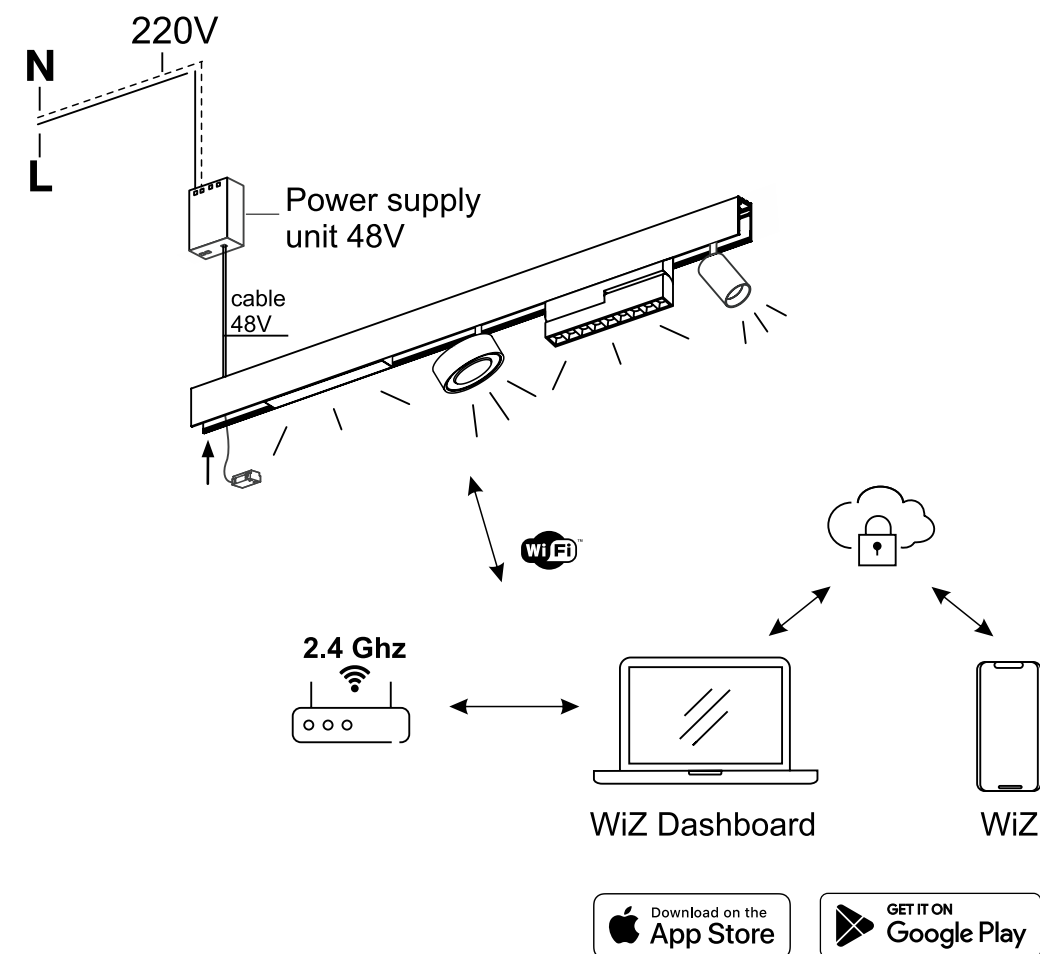

Connected App is a smartphone and tablet app that allows you to control lighting installed on WIZ devices.

To get started with the WIZ app, you'll need to:

- Install WIZ lamps or fixtures in your home or office.
- They should be connected to Wi-Fi.
- Download the WIZ Connected App on your smartphone or tablet. The app is available for free on iOS and Android devices.
- Register on the app and set up your account.

After registration, you'll be prompted to add all the WIZ devices you want to control to the app. You can do this by following the instructions in the app.



2700K



3000K




4000K



6500K


LTX

OUTDOOR



Ceiling recessed

RAIN IP



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
08.0667.6.930.WH	516	6,3	3000	>90	700	White
08.0667.6.930.GR	516	6,3	3000	>90	700	Graphite

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL GL

ⓘ » 318

Ceiling recessed



08.0667.6.930.WH




08.0667.6.930.GR

KASK



Code	Product Lumen	Power Watt	Color T (K)	CRI	*	Color
08.1100.7.000.GR	xxx	7	xxx	xxx	GU10	Graphite

1 X LED BULB GU10 NOT INCLUDED



CE ENEC DALI F IP65 EXCL


MATERIAL | AL GL

» 318

BARREL76 S



Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
08.1111.9.930.GR.50	1200	9	3000	>90	250	Graphite




LED CE ENEC DALI F IP65 INCL 50°

MATERIAL | AL GL

» 318



BIM70 S



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.1112.8.930.GR.50	948	8,4	3000	>90	220	Graphite


LED CE ENEC IP65 INCL

MATERIAL | AL GL

» 318



GRAPH1



Code	Product Lumen	Power Watt	Color T (K)	CRI	*	Color
08.2010.7.000.WH	xxx	7	xxx	xxx	GU10	White
08.2010.7.000.GR	xxx	7	xxx	xxx	GU10	Graphite


ⓘ 1 X LED BULB GU10 NOT INCLUDED



MATERIAL | AL GL

ⓘ » 318

GRAPH2



Code	Product Lumen	Power Watt	Color T (K)	CRI	*	Color
08.2010.14.000.WH	xxx	2x7	xxx	xxx	GU10	White
08.2010.14.000.GR	xxx	2x7	xxx	xxx	GU10	Graphite

ⓘ 2 X LED BULB GU10 NOT INCLUDED



MATERIAL | AL GL


ⓘ » 318




08.2010.7.000.WH



08.2010.14.000.WH

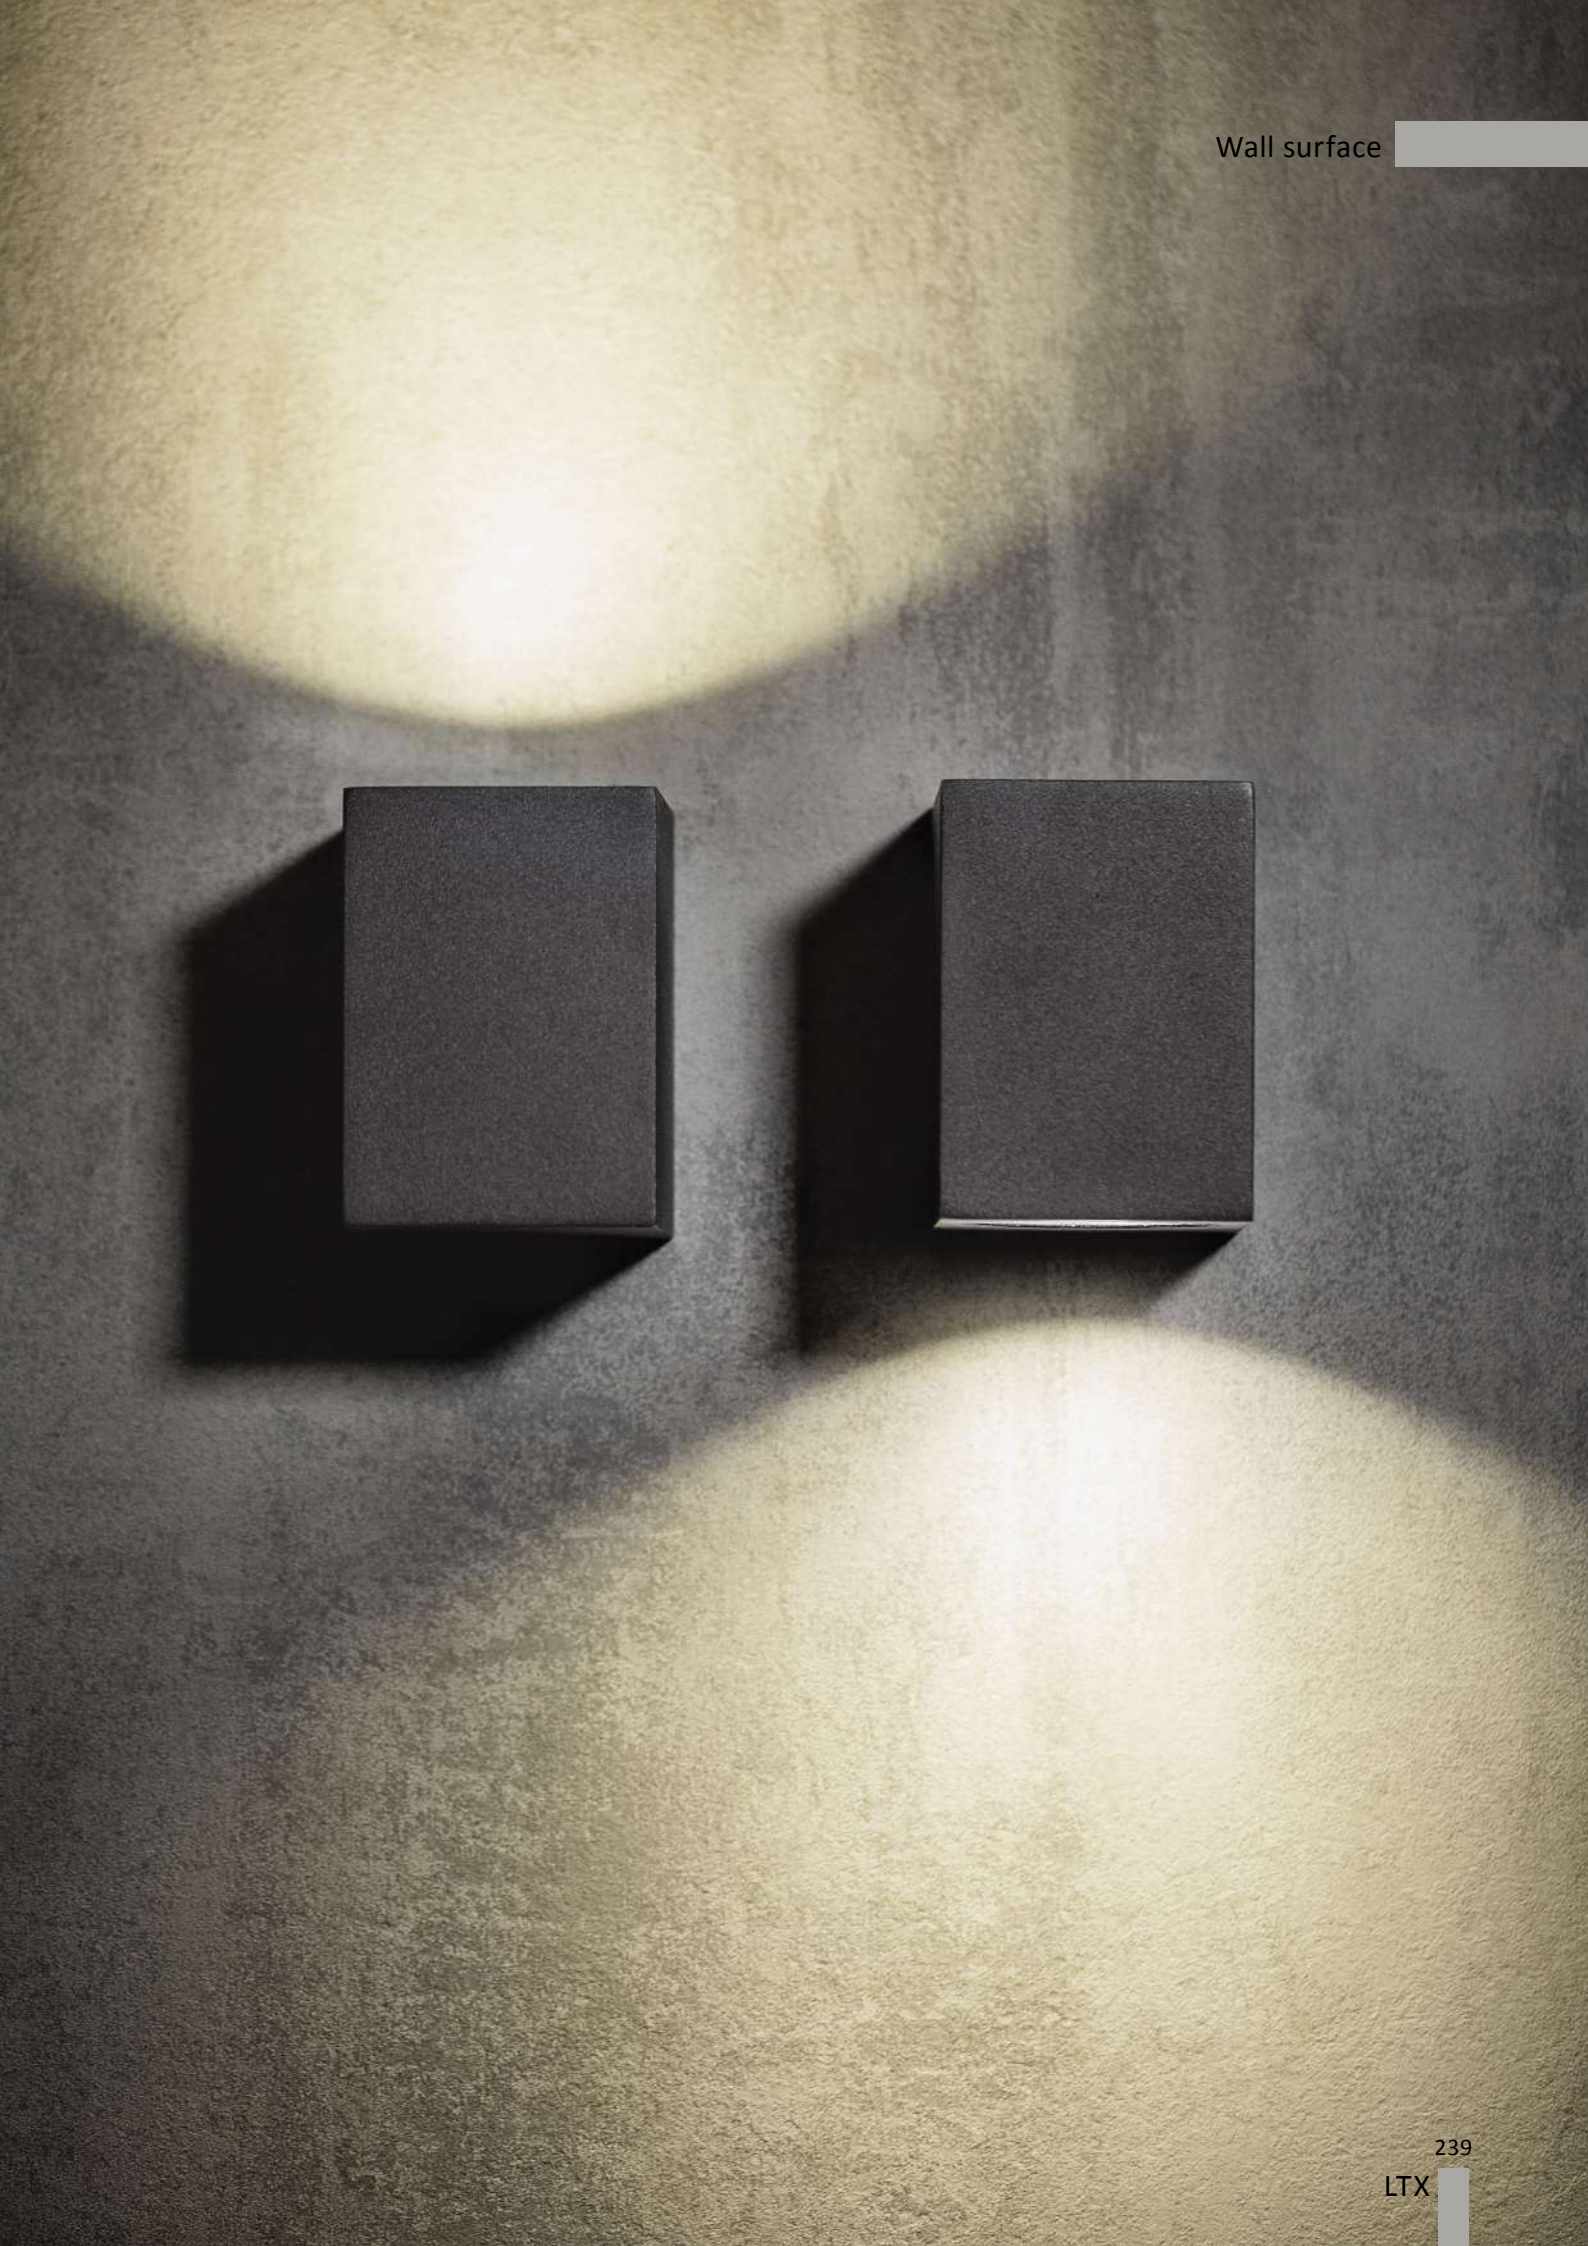

BRICK 1



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.2003.4.930.WH	314	4	3000	>90	220	White
08.2003.4.930.GR	314	4	3000	>90	220	Graphite

LED

CE


ERL

IP65

MATERIAL | AL GL

» 318

BRICK 2



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.2003.8.930.WH	2 x 314	2 x 4	3000	>90	220	White
08.2003.8.930.GR	2 x 314	2 x 4	3000	>90	220	Graphite

LED

CE

ERL

IP65

MATERIAL | AL GL

» 318



08.2003.4.930.WH



08.2003.8.930.WH




Wall surface

BUTTON IP



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.2051.18.927.GR	161	18	2700	>90	220	Graphite



MATERIAL |  AL  GL


 » 318

Wall surface



Wall surface

ON WALL



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.2036.14.930.GR	769	14	3000	>90	220	Graphite

LED

CE

EMC

RoHS

IP65

INCL

36°

MATERIAL |


AL

GL

i

 » 318


Wall surface

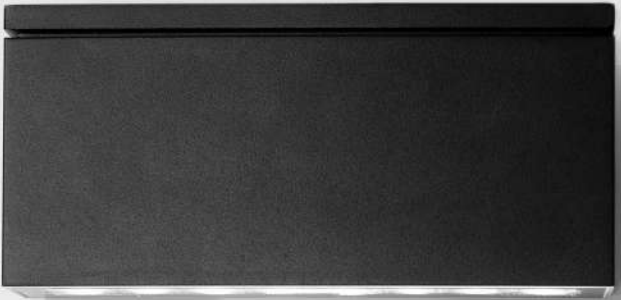

ON WALL IP



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.2020.13.930.GR	455	12,6	3000	>90	220	Graphite



MATERIAL | AL GL

» 318




Ceiling surface

WIN IP



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.1052.5.930.GR	198	4,5	3000	>90	220	Graphite



MATERIAL | AL GL


» 318

Wall surface




Wall recessed

IN WALL IP



	Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
NEW	08.5240.R2.927.WH	21	2,1	2700	>90	700	White
	08.5240.R2.927.GR	21	2,1	2700	>90	700	Graphite

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL GL


» 318

IN WALL IP




	Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
NEW	08.5240.S2.927.WH	7	2,1	2700	>90	700	White
	08.5240.S2.927.GR	7	2,1	2700	>90	700	Graphite

DRIVER MUST BE PLACED ON REMOTE




MATERIAL | AL GL

» 318



08.5240.R2.927.WH





08.5240.S2.927.WH

Wall recessed



Wall recessed

IN WALL IP



	Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
NEW	08.5239.R2.927.WH	21	2,1	2700	>90	700	White
	08.5239.R2.927.GR	21	2,1	2700	>90	700	Graphite



ⓘ DRIVER MUST BE PLACED ON REMOTE

LED CE ENEC IP65 EXCL 87 x 142 25°x30°

MATERIAL | AL GL

ⓘ » 318

IN WALL IP




	Code	Product Lumen	Power Watt	Color T (K)	CRI	mA	Color
NEW	08.5239.S2.927.WH	7	2,1	2700	>90	700	White
	08.5239.S2.927.GR	7	2,1	2700	>90	700	Graphite

ⓘ DRIVER MUST BE PLACED ON REMOTE


LED CE ENEC IP65 EXCL 87 x 142 25°x30°

MATERIAL | AL GL

ⓘ » 318



08.5239.R2.927.WH




08.5239.S2.927.WH

Wall recessed





Wall recessed

IN WALL DOT



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.3854.R1.830.SS	42	1,4	3000	>80	24	Stainless steel

 DRIVER MUST BE PLACED ON REMOTE




MATERIAL |  INOX

 » 318

Wall recessed



VISOR50




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.3011.8.930.GR.15	750	7,7	3000	>90	48	Graphite
08.3011.8.930.GR.30	750	7,7	3000	>90	48	Graphite
08.3011.8.930.GR.50	750	7,7	3000	>90	48	Graphite

ⓘ DRIVER MUST BE PLACED ON REMOTE

ACCESSORIES

	Spike	D 40 mm, H 164 mm	08.3011.SPIKE
	Anchor system	D 38 mm H 182 mm	08.3011.ANCHOR


ⓘ » 313



MATERIAL | AL GL

ⓘ » 318

VISOR72




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.3012.11.930.GR.15	1423	10,3	3000	>90	48	Graphite
08.3012.11.930.GR.30	1423	10,3	3000	>90	48	Graphite
08.3012.11.930.GR.50	1423	10,3	3000	>90	48	Graphite

ⓘ DRIVER MUST BE PLACED ON REMOTE

ACCESSORIES

	Tree belt	W 80 mm, H 60 mm, L 1800 mm	08.30.1112.BELT
	Spike	D 40 mm, H 164 mm	08.3011.SPIKE
	Anchor system	D 60 mm H 172 mm	08.3012.ANCHOR

ⓘ » 313




MATERIAL | AL GL

ⓘ » 318




VISOR140



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.3007.6.930.GR	205	6,3	3000	>90	220	Graphite

Installation of the luminous flux limiter

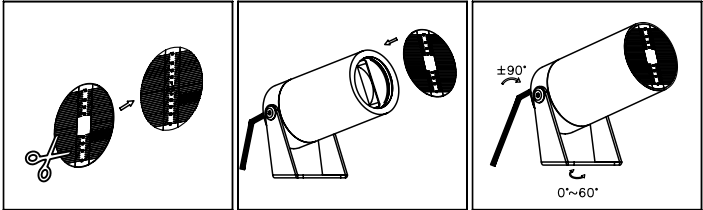


MATERIAL | AL GL

» 318


ACCESSORIES

	Tree belt	W 80 mm, H 60 mm, L 1800 mm	08.30.1112.BELT
	Spike	D 40 mm, H 164 mm	08.3011.SPIKE
	Anchor system	D 60 mm H 172 mm	08.3012.ANCHOR


» 313

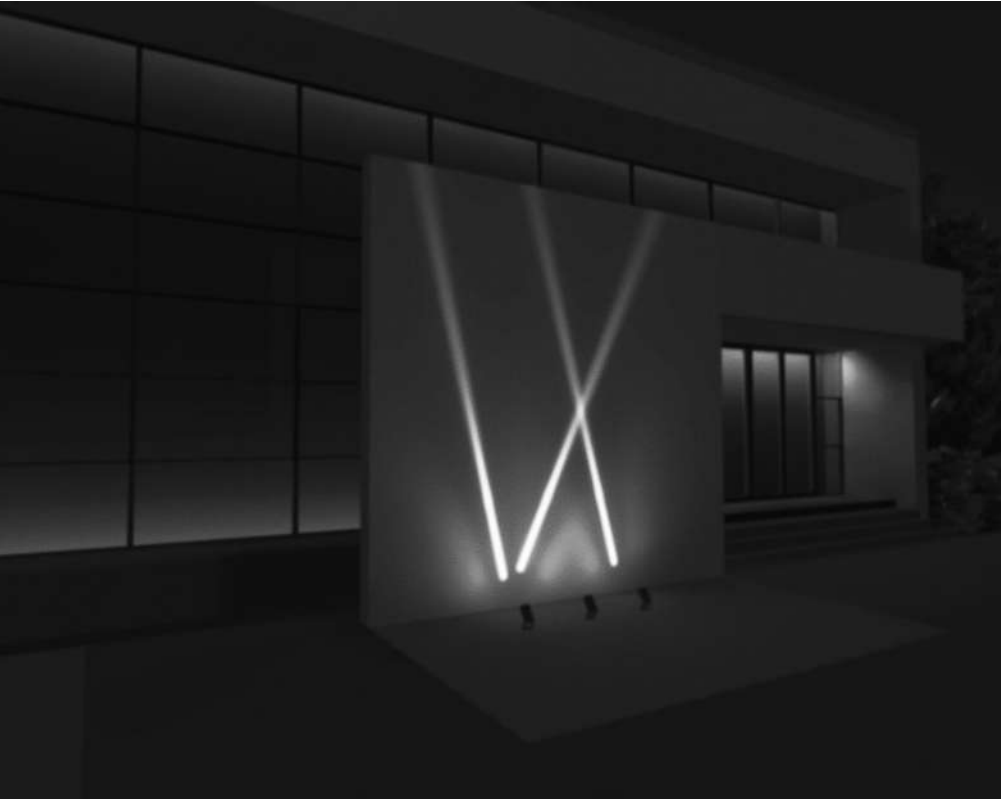

UPP77



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.4011.8.930.SS.30	750	7,7	3000	>90	48	Stainless steel




ⓘ DRIVER MUST BE PLACED ON REMOTE




MATERIAL | INOX GL ⓘ » 318

UPP77 WW



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.4012.6.930.SS.WW	503	6,2	3000	>90	48	Stainless steel




ⓘ DRIVER MUST BE PLACED ON REMOTE




MATERIAL | INOX GL ⓘ » 318

UPP 220V



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.4013.R6.930.SS.30	532	6,3	3000	>90	220	Stainless steel




MATERIAL | INOX GL ⓘ » 318



BARD1 68



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.5000.10.830.GR	600	10	3000	>90	220	Graphite



MATERIAL | AL PMMA


» 318



BARD2




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.5001.10.930.GR	752	10	3000	>90	220	Graphite




MATERIAL | AL PMMA

» 318

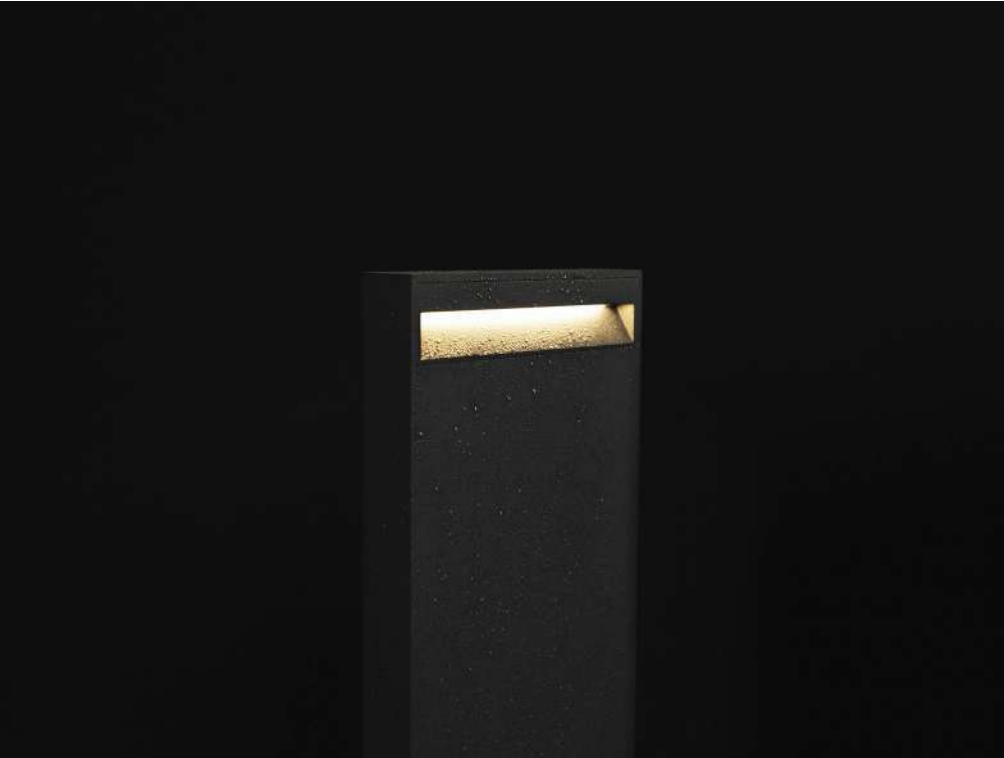

BARD3



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.5003.13.927.GR	894	13	2700	>90	220	Graphite

LED CE ENEC IP65 INCL 360°

MATERIAL | AL PMMA


i » 318



BARD4



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.5004.18.927.GR	617	18	2700	>90	220	Graphite




LED CE ENEC IP65 INCL 120°

MATERIAL | AL PMMA

i » 318



BARD5



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.5005.18.927.GR	685	18	2700	>90	220	Graphite

LED CE ENEC INCL

MATERIAL | AL PMMA


» 318



BARD6




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.5006.18.927.GR	877	18	2700	>90	220	Graphite




LED CE ENEC IP65 INCL 360°

MATERIAL | AL PMMA

i » 318

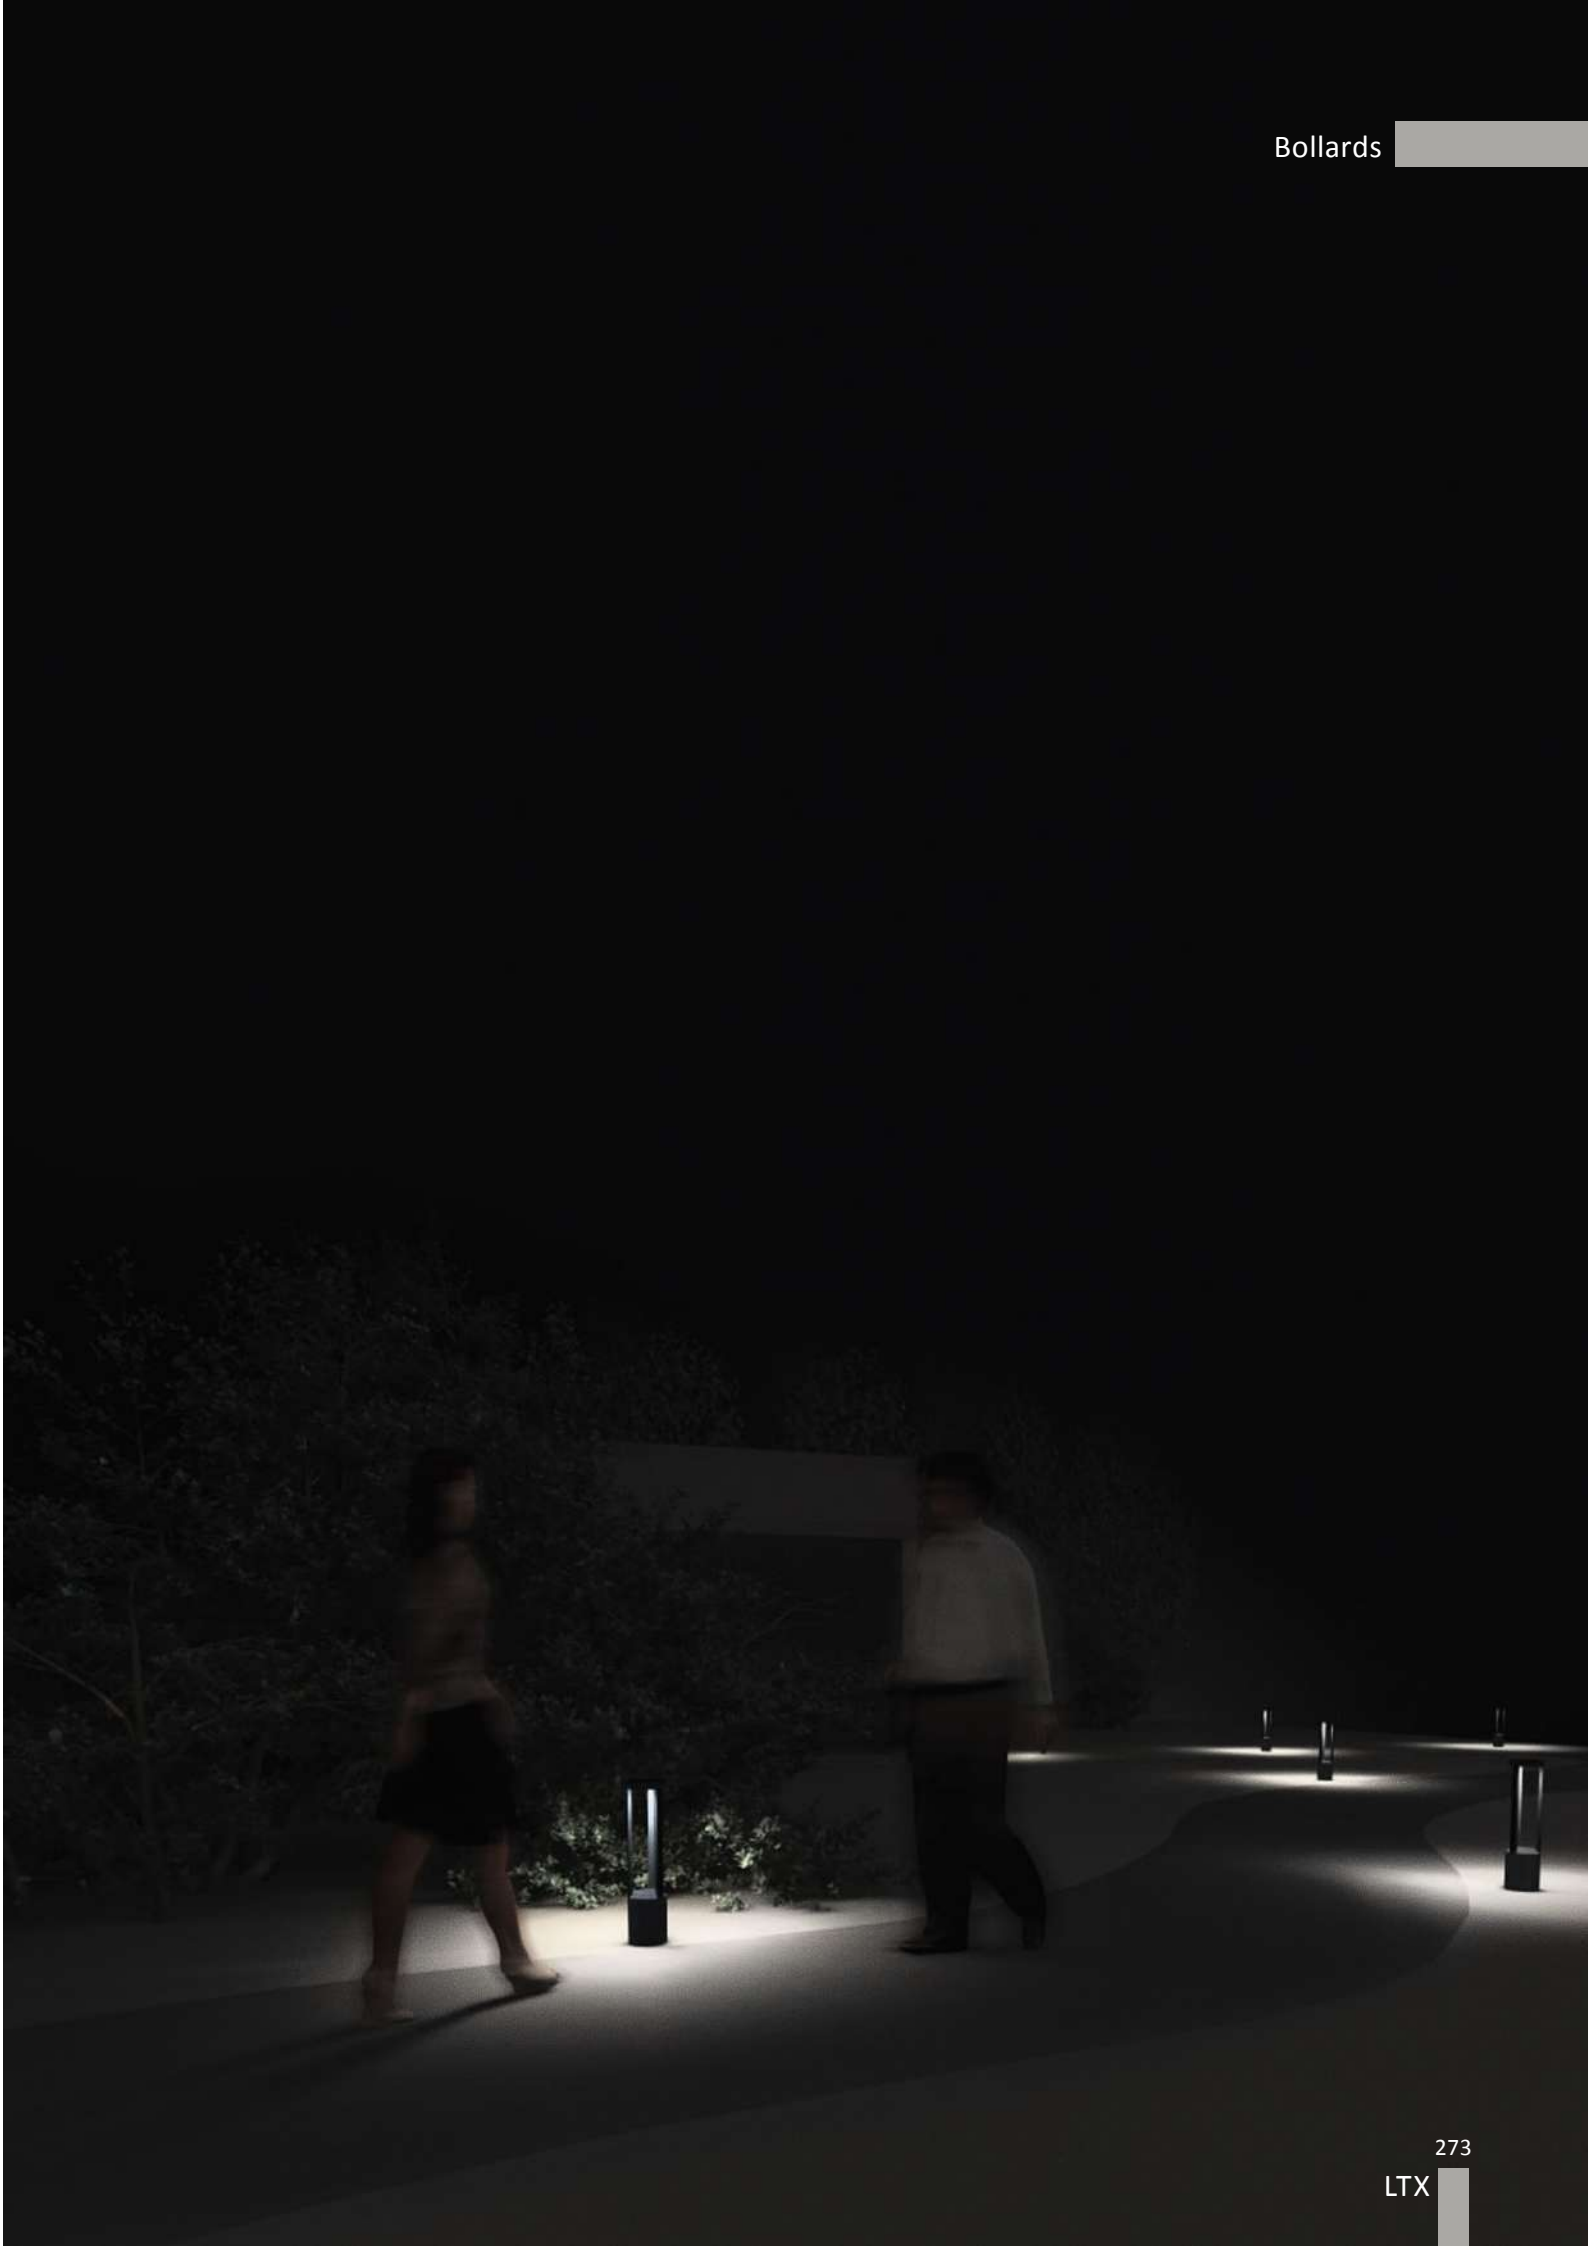

YARD 2



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.6006.4.830.GR	160	4	3000	>90	48	Graphite


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 318

YARD 2



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.6012.8.830.GR	320	8	3000	>90	48	Graphite

ⓘ DRIVER MUST BE PLACED ON REMOTE




MATERIAL | AL PC

ⓘ » 318



YARD

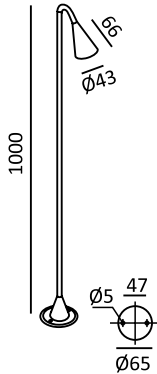

Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.6010.4.927.GR	248	3,6	2700	>90	24	Graphite


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 318

YARD 1



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
08.6020.6.930.GR	248	6,3	3000	>90	220	Graphite




MATERIAL | AL PC

ⓘ » 318






LED STRIP & PROFILE



Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.48.120.09.20.050.830	5000x10x1,6	48	120	9,6	830	>80	3000K
11.48.120.09.20.050.840	5000x10x1.6	48	120	9,6	840	>80	4000K



i » 318



Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.48.120.09.20.300.830	30000x10x1,6	48	120	9,6	830	>80	3000K
11.48.120.09.20.300.840	30000x10x1,6	48	120	9,6	840	>80	4000K



i » 318





11.48.120.09.20.050.830



11.48.120.09.20.050.840






Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.S120.10.20.050.830	5000x8x1,5	24	120	9,6	960	>80	3000K
11.24.S120.10.20.050.840	5000x8x1,5	24	120	9,6	1040	>80	4000K



i » 318




Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.S120.10.65.050.830	5000x10x4,8	24	120	9,6	960	>80	3000K
11.24.S120.10.65.050.840	5000x10x4,8	24	120	9,6	1040	>80	4000K



i » 318






Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.120.10.20.050.923	5000x12x1,5	24	120	9,6	760	>90	2300K



i » 318







Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.128.09.20.050.830	5000x8x1,5	24	128	9,6	1335	>80	3000K



i » 318





Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.192.19.20.040.930	4000x15x1,5	24	192	20,8	2250	>90	3000K
11.24.192.19.20.040.940	4000x15x1,5	24	192	20,8	2345	>90	4000K

LED

CE

EN60598

III

IP20

EXCL

118°

4M/Roll




8/41,67 mm

-LEDs/cut

R30

i » 318





Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.COF4.09.20.025.927	2500x4x1,6	24	COF	9	610	>90	2700K
11.24.COF4.09.20.025.930	2500x4x1,6	24	COF	9	680	>90	3000K
11.24.COF4.09.20.025.940	2500x4x1,6	24	COF	9	760	>90	4000K



» 318

Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.COF8.09.20.050.930	5000x8x1,6	24	COF	9	640	>90	3000K
11.24.COF8.09.20.050.940	5000x8x1,6	24	COF	9	640	>90	4000K



» 318

Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.COF8.09.67.050.930	5000x10x4,8	24	COF	9	640	>90	3000K
11.24.COF8.09.67.050.940	5000x10x4,8	24	COF	9	640	>90	4000K



» 318



11.24.COF4.09.20.025.927





11.24.COF4.09.20.025.930



11.24.COF4.09.20.025.940






Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	Color T(K)
11.24.120.11.20.050.RGB	5000x8x1,5	24	120	11	430	RGB
					/	Red
					/	Green
					/	Blue



i » 318




Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	Color T(K)
11.24.168.16.20.050.RGB	5000x10x1,5	24	168	17,3	534	RGB
					/	Red
					/	Green
					/	Blue



i » 318






Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	Color T(K)
11.24.60.19.20.050.RGBW	5000x12x2,1	24	60	19,2	430	RGB
					/	Red
					/	Green
					/	Blue
					703	3000K



i » 318






Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	Color T(K)
11.24.140.17.20.050.927-960	5000x10x1,6	24	140	19,2	1710	2700-6000K



i » 318







Code	Size (mm)	DC(V)	Max. W/m	LM/m	CRI	Color T(K)
11.24.D18.14.65.050.930	5000xØ18	24	16	800	>90	3000K
11.24.D18.14.65.050.940	5000xØ18	24	16	800	>90	4000K



[i](#) » 318




Code	Size (mm)	DC(V)	Max. W/m	LM/m	CRI	Color T(K)
11.24.D25.14.65.050.930	5000xØ25	24	16	950	>90	3000K
11.24.D25.14.65.050.940	5000xØ25	24	16	950	>90	4000K



[i](#) » 318



FLEXY 48



Code	Product Lumen/m	Power Watt/m	Color T (K)	CRI	DC (V)	Color
11.48N.2010.5.500.827	140	5,8	2700	>80	48	White
11.48N.2010.5.500.830	140	5,8	3000	>80	48	White

LED

CE

EMC

IP67

48V

EXCL

110*

-LEDs/cut

166 mm

R60



» 318

ACCESSORIES

	END CAP One end cap +one plug	11.SECAP.WH
	Installation clip	11.CLIP.ALUE
	Installation profile	11.S1000.ALU
	Gum filler 10ml	11.GLU.10



PROFILE COUNTUR




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.4033.25	Profile x 1	2500x59x58	Aluminum	Silver
	Diffuser x 1	2500x34,2x10,2	Polycarbonate	Opal
	End cap x 2	46,1x26,4x1,5	Polycarbonate	Silver
12.4033.EC	End cap	46,1x26,4x1,5	Polycarbonate	Silver




i » 318



PROFILE CENTRAL 1




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2013.25	Profile x 1	2500x60x13	Aluminum	Silver
	Diffuser x 1	2500x16,7x7,8	Polycarbonate	Opal
	End cap x 2	20x20x4,5	Polycarbonate	Silver
12.2013.EC	End cap	20x20x4,5	Polycarbonate	Silver




i » 318

PROFILE COUNTUR TRIM




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2409.25	Profile x 1	2500x23,8x8,8	Aluminum	Silver
	Diffuser x 1	2500x6,4x2,8	Polycarbonate	Opal
	End cap x 2	23,8x8,8x13,3	Polycarbonate	Silver
12.2409.EC	End cap	23,8x8,8x13,3	Polycarbonate	Silver




i » 318

PROFILE CENTRAL 2




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.3524.25	Profile x 1	2500x85x24	Aluminum	Silver
	Diffuser x 1	2500x34,2x10,2	Polycarbonate	Opal
	End cap x 2	38,6x24x2	Polycarbonate	Silver
12.3524.EC	End cap	38,6x24x2	Polycarbonate	Silver




i » 318

PROFILE MINI TRIM





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2513.25	Profile x 1	2500x25x13	Aluminum	Silver
	Diffuser x 1	2500x14,7x4,5	Polycarbonate	Opal
	End cap x 2	25x13x11	Polycarbonate	Silver
12.2513.EC	End cap	25x13x11	Polycarbonate	Silver



i » 318

PROFILE IN





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1212.IN.25	Profile x 1	2500x45,4x25,1	Aluminum	Silver
	Diffuser x 1	2500x11x4,6	Polycarbonate	Opal
	End cap x 2	12,5x13,3x6,7	Polycarbonate	Silver
12.1212.IN.EC	End cap	12,5x13,3x6,7	Polycarbonate	Silver



i » 318

PROFILE OUT




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1212.OUT.25	Profile x 1	2500x50x22,3	Aluminum	Silver
	Diffuser x 1	2500x11x4,6	Polycarbonate	Opal
	End cap x 2	22,1x15x7	Polycarbonate	Silver
12.1212.OUT.EC	End cap	22,1x15x7	Polycarbonate	Silver




i » 318

PROFILE W&T IN



Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1417.WT.IN.25	Profile	2500x43x43	Aluminum	Silver
12.1417.WT.IN.DIF	Diffuser	1000x14x3	Polycarbonate	Opal
12.1417.WT.IN.EC	End cap	15,2x12,2x7	Polycarbonate	Silver




CE ENE IP20 Instr. Symmetrical 10 mm >80% Panel for walls

i » 318

PROFILE IN SURF




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1616.25	Profile x 1	2500x16x16	Aluminum	Silver
	Diffuser x 1	2500x19,4x6	Polycarbonate	Opal
	End cap x 2	16x16x6,5	Polycarbonate	Silver
12.1616.EC	End cap	16x16x6,5	Polycarbonate	Silver




CE ENE IP20 Instr. Symmetrical 8 mm >70%

i » 318

PROFILE W&T OUT





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2510.WT.OUT.25	Profile x 1	2500x36x36	Aluminum	Silver
	Diffuser x 1	2500x18,9x6,5	Polycarbonate	Opal
	End cap x 2	22,6x13,34x7	Polycarbonate	Silver
12.2510.WT.OUT.EC	End cap	22,6x13,34x7	Polycarbonate	Silver



CE ENE IP20 Instr. Symmetrical 8 mm >70% Panel for walls

i » 318

PROFILE FLOOR IN





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2127.25	Profile x 1	2500x21,3x26,1	Aluminum	Silver
	Diffuser x 1	2500x19x5	Polycarbonate	Opal
	End cap x 2	25,8x21,4x6	Polycarbonate	Silver
12.2127.EC	End cap	25,8x21,4x6	Polycarbonate	Silver

CE ENE IP20 EXCL Instr. Symmetrical 8 mm >75%

i » 318

PROFILE FLOOR IN





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2711.25	Profile x 1	2500x27,1x11	Aluminum	Silver
	Diffuser x 1	2500x11x10	Polycarbonate	Opal
	End cap x 2	27x11x10	Polycarbonate	Silver
12.2711.EC	End cap	27x11x10	Polycarbonate	Silver

CE ENE IP20 EXCL Instr. Symmetrical 8 mm >75%

i » 318

PROFILE FLOOR



Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1032.25	Profile x 1	2500x31,7x99,5	Aluminum	Silver
	Diffuser x 1	2500x13,7x8,5	Polycarbonate	Opal

CE ENE IP20 Instr. Wall-washing 8 mm >80%


i » 318



SHIELD FOR TUB M




	Code	Color
Replaceable shield	06.A05SH.BR	Brass
	06.A05SH.CP	Copper




CE ENEC IP20

MATERIAL | AL

SHIELD L FOR TUB M

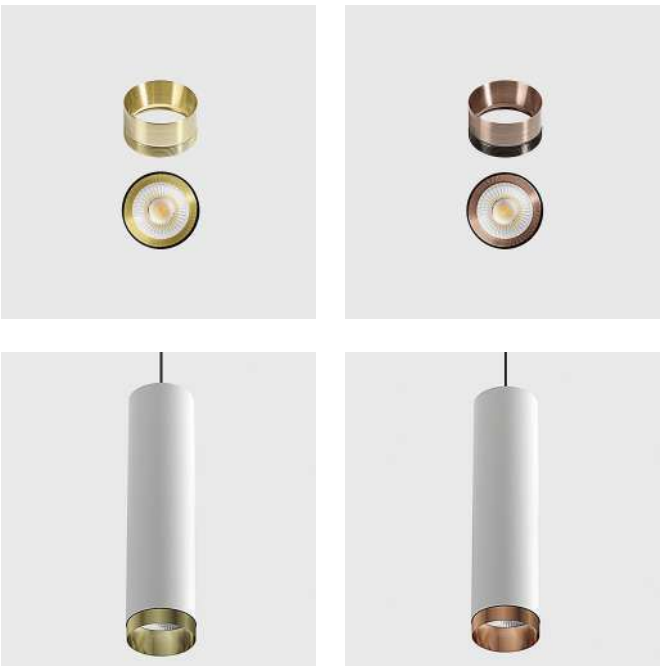


	Code	Color
Replaceable shield L	06.A05SHL.BR	Brass
	06.A05SHL.CP	Copper



CE ENEC IP20

MATERIAL | AL


WALL WASHER FOR TUB M



Code	
Replaceable wall washer, black color	06.A05WW
MATERIAL PC	

CE ENEC IP20


DIFFUSER FOGGY FOR TUB M



Code	
Replaceable foggy diffuser	06.A05SFT
MATERIAL PC	

CE ENEC IP20


SNOOT FOR TUB M



Code	
Replaceable snoot, black color	06.A05NB
MATERIAL PC	

CE ENEC IP20


DIFFUSER LINE FOR TUB M



Code	
Replaceable line diffuser	06.A05ELPS
MATERIAL PC	

CE ENEC IP20


FOGGY COWER FOR TUB M



Code	
Replaceable foggy cover, mat white color	06.A05FG
MATERIAL GL	

CE ENEC IP20


HONEYCOMB FOR TUB



Replaceable honeycomb, black color	Model	Size	Code
	TUB S	23 mm	06.A03HC
	TUB M	43 mm	06.A05HC
	TUB L	62 mm	06.A07HC
MATERIAL AL			

CE ENEC IP20

LENS



			Code
Series TUB S		Lens 24°	06.A03LS24
		Lens 15°	06.A05LS15
		Lens 30°	06.A05LS30
Series NANO		Lens 12°	01.A39LS12
		Lens 30°	01.A39LS30
Series SOL		Lens 12°	06.A09LS12

CE ENEC IP20 MATERIAL | PC


RING FOR SOL MINI



	Color	Code
Replaceable ring series SOL MINI 	White	SOL M RING WHITE
	Black	SOL M RING BLACK
	Diamond black	SOL M RING DIAMOND BLACK
	Brass	SOL M RING BRASS
	Copper	SOL M RING COPPER
	Chrome	SOL M RING CHROME

CE ENEC IP20 MATERIAL | AL


RING FOR SOL

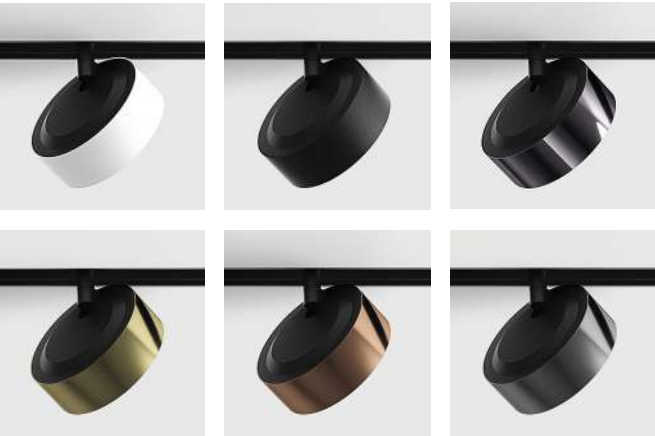

	Color	Code
Replaceable ring series SOL 	White	SOL RING WHITE
	Black	SOL RING BLACK
	Diamond black	SOL RING DIAMOND BLACK
	Brass	SOL M RING BRASS
	Copper	SOL RING COPPER
	Chrome	SOL RING CHROME

CE ENEC IP20 MATERIAL | AL

SHIELD FOR NANO R

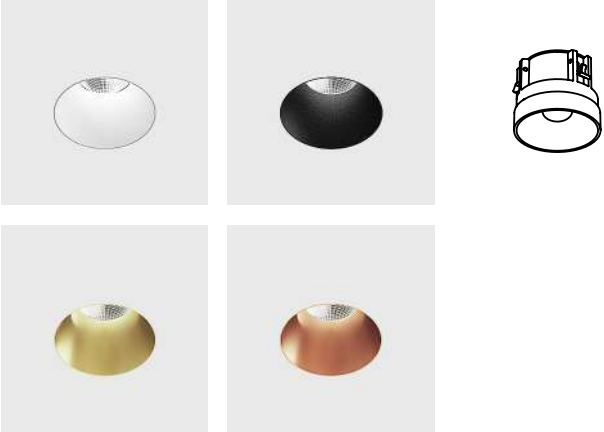

	Color	Code
Replaceable shield series NANO R	White	01.A390.WH
	Black	01.A390.BK
	Brass	01.A390.BR
	Copper	01.A390.CP

CE ENEC IP20 MATERIAL | AL

SHIELD FOR NANO S



	Color	Code
Replaceable shield series NANO S	White	01.A391.WH
	Black	01.A391.BK
	Brass	01.A391.BR
	Copper	01.A391.CP

CE ENEC IP20 MATERIAL | AL

SYMBOLS GLOSSARY

NOTE CONCERNING THE VALUES INDICATED IN THIS CATALOGUE

The power (W) and luminous flux (Lm) values indicated in this catalogue correspond to the luminaire.

LUMEN

The lumen (lm) is the unit that measures the luminous flux, a measurement of the luminous output emitted by the source. The luminous flux is the measurement of total luminous output emitted by a lamp and that is perceived by the human eye.

CRI

A color rendering index (CRI) is a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with an ideal or natural light source.

COLOR TEMPERATURE

The color temperature from a light Source is measured in degrees Kelvin (K). Color temperatures over 5000K are known as cold colors (blue-white) while temperatures between 2700 and 3000K are considered as warm colors.

IP CODE

Coding system that indicates the levels of protection achieved by means of a coating against access to hazardous parts, intrusion of solid foreign bodies and water ingress. The IP code is composed of two digits located immediately after the letters “IP”, and whose meaning is explained in the table below:

SYMBOLS GLOSSARY

	Protected against the ingress of solid bodies greater than Ø 12 mm. No protection against the ingress of moisture
	Protected against the ingress of solid bodies greatest than Ø2,5mm. Protected against sprays of water
	Protected against the ingress of solid bodies greater than Ø 1 mm. No protection against the ingress of moisture
	Protected against the ingress of solid bodies greater than Ø 1 mm. Protected against rain
	Protected against the ingress of solid bodies greater than Ø 1 mm. Protected against splashing water
	Protected against the ingress of dust Protected against jets of water
	Protected against the ingress of dust Protected from powerful jets of water
	Protected against the ingress of dust Protected against immersion in water for limited periods
	Protected against the ingress of dust Protected against total immersion in water for an indefinite period (depth shown in meters)
	Class I Fitting whose protection against electric shock is based on earth wiring
	Class II Fitting whose protection against electric shock is based on reinforced double insulation
	Class III Fitting whose protection against electric shock is based on a safety extra low voltage supply SELV, in which voltages higher than those of SELV are not generated
	Suitable for installation on normally flammable surfaces
	Product in conformity with the requirements of relevant European Safety standards
	Product in conformity with the requirements of relevant Eurasian standards
	Product in conformity with the requirements of relevant Ukrainian standards

SYMBOLS GLOSSARY

	LED lamp		Fitting hole for recessed luminaires in mm
	Electronic control gear included		Recommended height
	Control gear not included		Tilting angle
	Made of		Minimum bend radius
	Diffuser		Length of roll
AL	Aluminum		—LEDs/cut Cutting length
PC	Polycarbonate		RGB color change
INOX	Stainless steel		Tunable white color change
PMMA	Polymethyl methacrylate		Light distribution: wall-washing
GL	Glass		Recommended tape width
48V	Power supply voltage 48V		Light transmission of diffuser
42V	Power supply voltage 42V		Installation in wooden panels
24V	Power supply voltage 24V		Installed before facing
STEEL	Low profile metal casing		



Contact Us

Hoset group

myynti@hoset.fi

<http://hoset.fi>